

# Location:



## 9603-PLR, 9603-PLR-TRM, 9603-PLR-TRMTC Hand Shower Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> <li>Origins Hand Shower System or Trim</li> <li>Requires Temptrol® Pressure Balancing Tub/Shower Valve (p/n <b>262BODY</b> included with 9603-PLR)</li> <li>Adjustable stop screw to limit handle turn (included with 9603-PLR)</li> <li>Metal lever handle</li> <li>ADA 36" grab bar for hand shower wand</li> <li>Dual checks for backflow protection</li> <li>60" flexible metal hose</li> <li>ADA 1 mode hand shower wand with non-positive shutoff</li> <li>2.0 gpm (7.6 L/min) flow restrictor</li> <li>Tub spout not included</li> <li>Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9603PLRTRMTC)</li> <li>For optional in-line vacuum breaker order p/n EF-109</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> <b>L2</b> Less hand shower wand</li> <li><input type="checkbox"/> <b>L5</b> Less hand shower</li> <li><input type="checkbox"/> <b>L7</b> Less handle system (less bar, hose, wand and elbow)</li> <li><input type="checkbox"/> <b>VP</b> Vandal resistant escutcheon screws in place of standard screws</li> <li><input type="checkbox"/> <b>STN</b> Satin Nickel finish</li> <li><input type="checkbox"/> <b>B</b> Brass escutcheon (chrome only)</li> <li><input type="checkbox"/> <b>X</b> Integral service stops - allows water shut-off at valve for service</li> </ul> <p><b>Note:</b> Append appropriate suffix to model number.</p>


Model Numbers	Compliance
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>9603-PLR</b> Hand Shower Trim with Temptrol Pressure Balancing Tub/Shower Valve (p/n <b>262BODY</b>)</li> <li><input type="checkbox"/> <b>9603-PLR-TRM</b> Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve ordered separately</li> <li><input type="checkbox"/> <b>9603-PLR-TRMTC</b> Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>	<ul style="list-style-type: none"> <li>ASME A112.18.1/CSA B125.1</li> <li>Buy American Act (9603-PLR only)</li> <li>WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)</li> </ul>  

Warranty	
<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>	

## Architectural/ Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (p/n 262BODY included with 9603-PLR), Adjustable stop screw to limit handle turn (included with 9603-PLR), Metal lever handle, ADA 36" grab bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower wand with non-positive shutoff, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9603PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower wand", "L5 - Less hand shower", "L7 - Less handle system (less bar, hose, wand and elbow)", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

## Dimensions

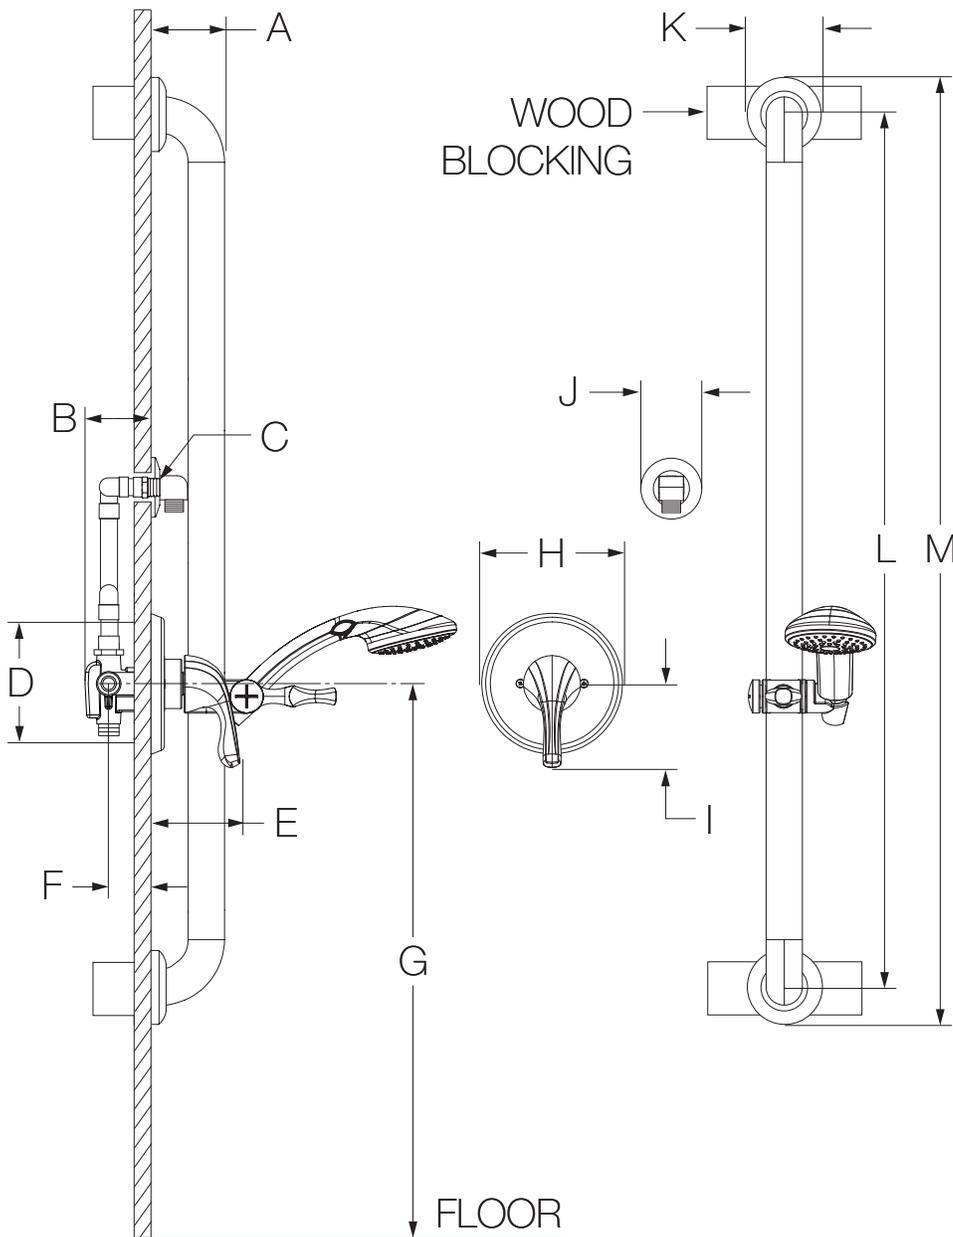

Measurements	
A	3", 76 mm
B	3-1/2", 89 mm
C	Male 1/2" NPT fitting must protrude 3/8" from finished wall
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	3-5/8", 92 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 42", 1067 mm
H	Ø 5-3/4", 146 mm
I	3-3/8", 86 mm
J	Ø 2-1/2", 64 mm
K	Ø 3-1/8", 79 mm
L	36", 914 mm
M	39", 991 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.