



Buy it for looks. Buy it for life.®

*There is more than 1 version of this model.  
Page down to identify the version you have.*

#### DESCRIPTION

- Metal construction
- Designed to be installed on decks up to 1-3/8" (35mm) on 10" centers
- Accommodates 1/2" (13mm) additional finish deck
- 1/2" CC inlets
- Includes test plug

#### OPERATION

- Can be installed with any Moen deck mounted Roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

#### FLOW

- Designed to deliver 16 gpm at 45 psi. (60L/min)

#### CARTRIDGE

- 1258 cartridge design with nonmetallic and stainless steel materials

#### STANDARDS

- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein


#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

**NOTE:** Plumbing codes require this product to be used with a device conforming to ASSE.


## Specifications

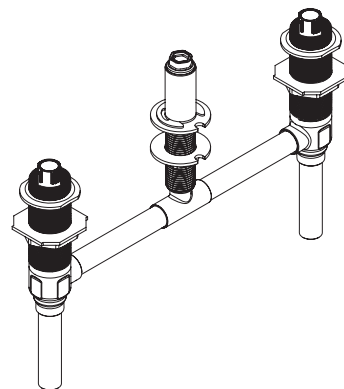

### Roman Tub High Flow Rough-In Valve 10" - Fixed Type

**Model:** 4796

104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

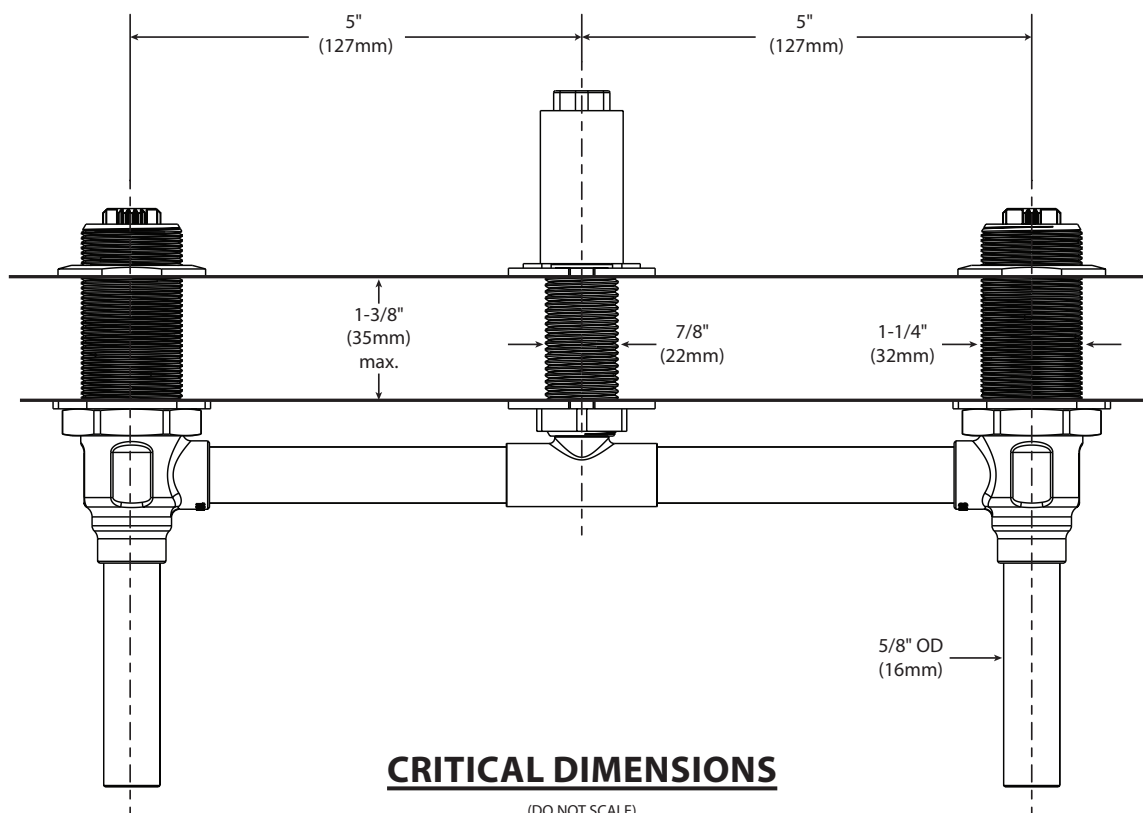



Buy it for looks. Buy it for life.®

## Specifications

### DESCRIPTION

- Metal construction
- Designed to be installed on decks up to 1-7/8" (48mm) on 10" centers
- Accommodates 1/2" (13mm) additional finish deck
- 1/2" CC inlets
- Includes test plug

### OPERATION

- Can be installed with any Moen deck mounted Roman tub trim kit
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle clockwise to open (counterclockwise to close)

### FLOW

- Designed to deliver 16 gpm at 45 psi. (60L/min)

### CARTRIDGE

- 1248 cartridge design with nonmetallic and stainless steel materials

### STANDARDS


- Designed and manufactured to comply with the applicable requirements of: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

**NOTE:** Plumbing codes require this product to be used with a device conforming to ASSE.

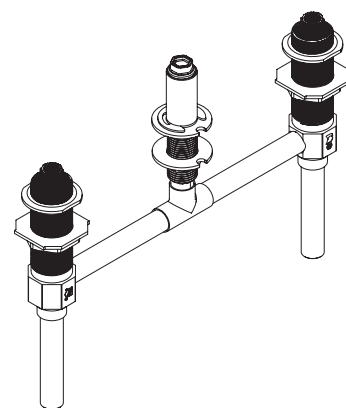

### Roman Tub High Flow Rough-In Valve 10" - Fixed Type

**Model: 4796**

104465 Thermostatic mixing valve sold separately is certified to ASSE 1070 and CSA B-125.3

