




3500-CYL-B-TRM, 3500CYLBTRMTC Shower Valve Trim Specification Submittal

<p>Feature Highlights</p> <ul style="list-style-type: none"> • Dia Shower Valve Trim • Requires Temptrol® Pressure Balancing Shower Valve • Metal lever handle • Showerhead not included • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish • Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3500CYLBTRMTC) 	<p>Options/Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> Delete Suffix B Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon <input type="checkbox"/> -REB Rebuild trim kit, includes TA-10 and TA-4 <input type="checkbox"/> -VP Vandal resistant escutcheon screws in place of standard screws <input type="checkbox"/> -BBZ Brushed Bronze finish <input type="checkbox"/> -MB Matte Black finish <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> -L7 Less handle <p>Note: Append appropriate -suffix to model number.</p>
<p>Model Numbers</p> <ul style="list-style-type: none"> <input type="checkbox"/> 3500-CYL-B-TRM Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately <input type="checkbox"/> 3500CYLBTRMTC Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap <input type="checkbox"/> 3500BTRM Shower Trim only 	<p>Warranty</p> <p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Compliance</p> <ul style="list-style-type: none"> • ASME A112.18.1/CSA B125.1 	

Architectural/ Engineering Specification

Symmons _____ Shower Valve Trim. Includes Dia shower valve trim, metal lever handle, and non-metallic construction plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.2/CSA B125.2 compliant. Available options: "REB -Rebuild trim kit", "VP - Vandal resistant escutcheon screws in place of stand screws", "BBZ - Brushed Bronze finish", "STN - Satin Nickel finish", "MB - Matte Black finish", and "L7 - Less handle".

Dimensions

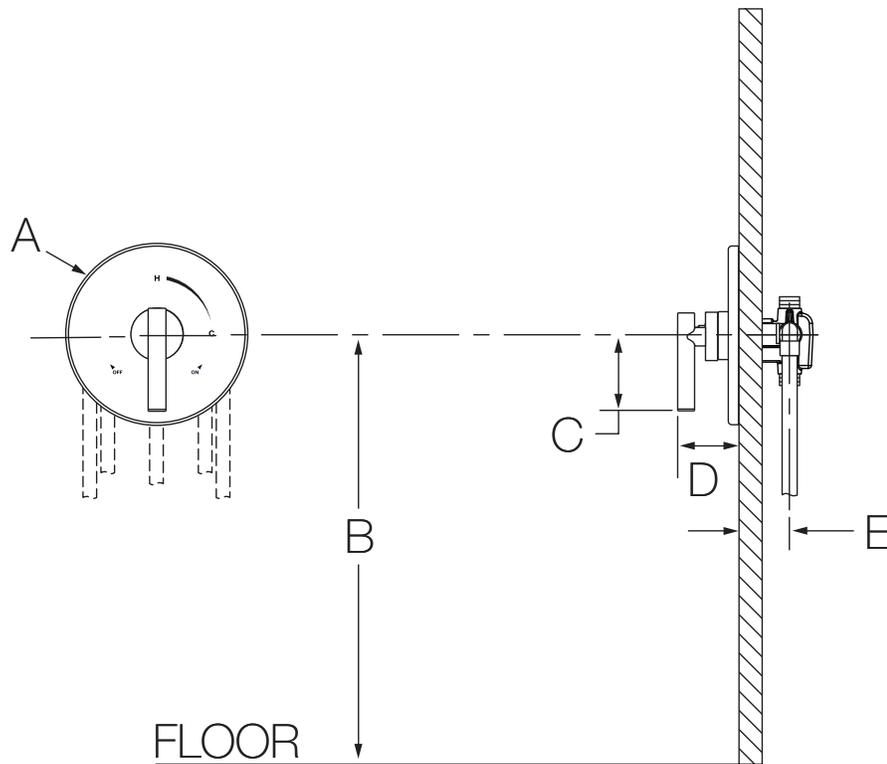

Measurements	
A	Ø 7-1/2", 191 mm
B	Ref. 42", 1067 mm
C	3", 76 mm
D	2-7/8", 73 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.