

Location:




6706-TRM, 6706TRMTC Tub/Shower/Hand Shower Trim Specification Submittal



Feature Highlights

- Identity Tub/Shower/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Requires Symmons Triple Outlet Diverter Valve
- Metal lever handle
- Cradle for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 5-1/2" non-diverter tub spout
- 1 mode hand shower wand with easy to clean nozzles
- 1 mode showerhead with easy to clean nozzles
- 2.0 gpm (7.6 L/min) flow restrictors
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 6706TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Options/Modifications

- ☐ **1.5**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower wand
- ☐ **L3** Less showerhead & hand shower (head and wand only)
- ☐ **L4** Less head, arm and flange
- ☐ **L5** Less hand shower system (less cradle, hose, wand and elbow)
- ☐ **L6** Less tub spout
- ☐ **L7** Less handle
- ☐ **STN** Satin Nickel finish

Note: Append appropriate -suffix to model number.

Model Numbers

- ☐ **6706-TRM**
Tub/Shower/Hand Shower Trim,
Temptrol Pressure Balancing Tub/Shower Valve and
Symmons Triple Outlet Diverter valve ordered separately
- ☐ **6706TRMTC**
Tub/Shower/Hand Shower Trim with TA-10 flow control
spindle and
T-12A cap assembly, must order Temptrol valve with Test
Cap

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense @ 1.5 gpm and 2.0 gpm (does not apply to L3 modification)




Architectural/ Engineering Specification

Symmons Identity _____ With Identity Tub/Shower/Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Requires Symmons Triple Outlet Diverter Valve, Metal level handle, Cradle for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 5-1/2" diverter tub spout, 1 mode hand shower wand with easy to clean nozzles, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap, For optional in-line vacuum breaker order p/n EF-109. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm and 2.0 gpm complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less showerhead, shower arm & flange", "L5 - Less hand shower system", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin nickel finish".

6706-TRM, 6706TRMTC

Dimensions

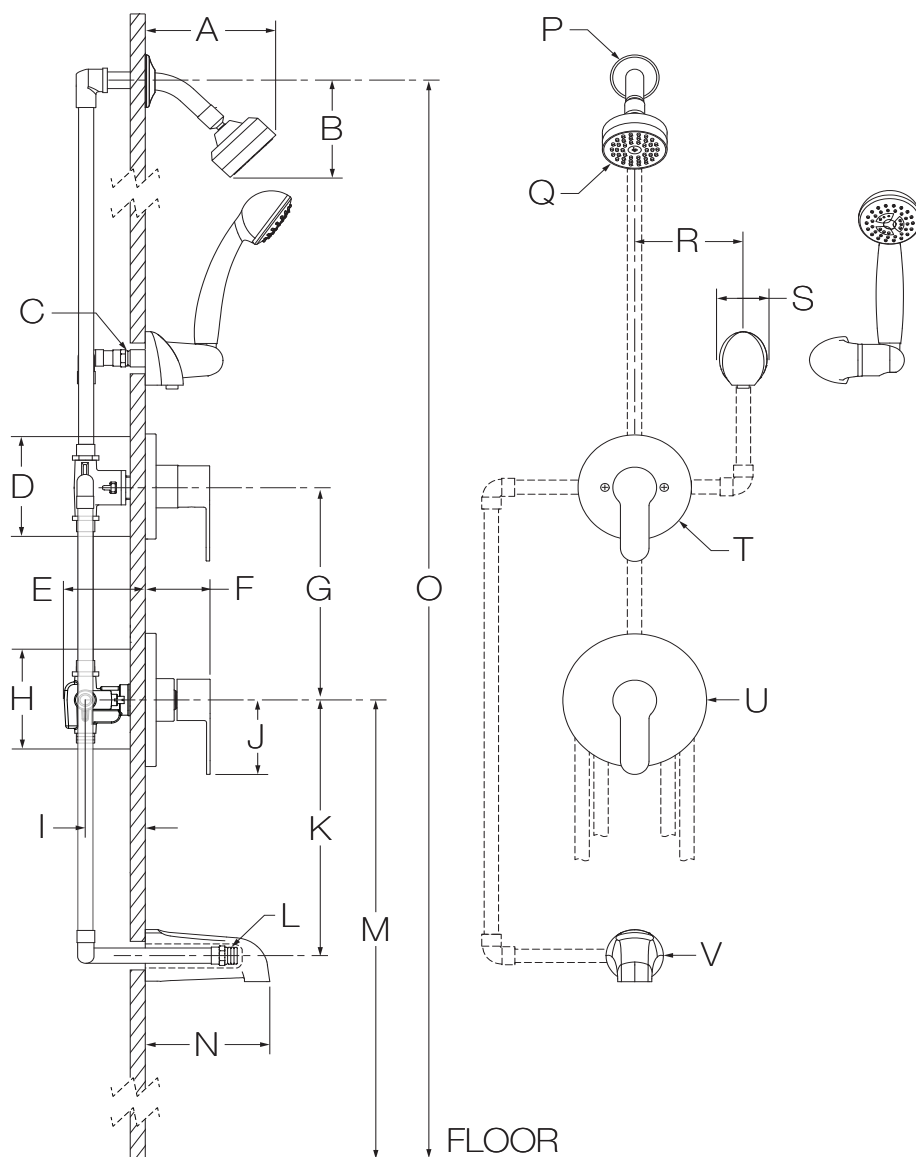

Measurements	
A	5-7/8", 149 mm
B	4-5/8", 117 mm
C	Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall
D	Diverter Valve Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm
E	3-1/2", 89 mm
F	2-7/8", 73 mm
G	Ref. 10", 254 mm
H	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	3-1/2", 89 mm
K	Ref. 12", 305 mm
L	Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall
M	Ref. 32", 813 mm
N	5-1/2", 140 mm
O	Ref. 77", 1956 mm
P	Ø 2-1/2", 64 mm
Q	Ø 3-1/8", 79 mm
R	6", 152 mm
S	2-1/8", 54 mm
T	Ø 5", 127 mm
U	Ø 6-3/8", 162 mm
V	Ø 2-1/2", 64 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.