



ONCE UPON A TIME...WATER®

KONCEPT EVO™ 60''

DR2056/DR2054

60'' Rectangular Sliding Door with KaliaPROTEK™ (left opening)

SPECIFICATIONS

Features

- Frameless sliding shower door for alcove shower (left opening)
- Fixed panel in clear tempered glass of 10 mm (3/8'') and mobile panel in clear tempered glass of 8 mm (5/16'') with KaliaPROTEK™ protective film (outside panels)
- Glasses with Duraclean treatment for easy maintenance (inside panels)
- Ultra-smooth rolling system
- Hidden anti-jump system without friction
- Closure with cushioned magnetic seals for an airtight and sound absorption
- Removable central guide for easy maintenance
- 1956 mm (77'') panel height provides freedom of movement
- Door access: 575 to 677 mm (22 5/8'' to 26 5/8'')
- 263 mm (10 3/8'') refined handle style (exterior handle)
- Minimum threshold required: 60 mm (2 3/8'')

2 CHOICES OF STYLE INCLUDED:



Finish

- Chrome:
- DR2056-110-XXX
- Brushed Nickel:
- DR2056-120-XXX
- Matte Black:
- DR2056-160-XXX

Glass pattern

- Clear tempered glass with KaliaPROTEK™:
- DR2056-XXX-005
 - DR2054-005



KaliaPROTEK™

This door can be installed with the following Kalia shower base(s) model(s):

- BW1213
- BW1228
- BW1458
- BW1414
- BW1282
- BW1096
- BW1107
- BW1079
- BW1457
- BW1415
- BW1097
- BW1966


INSTALLATION NOTES

Minimum threshold required for installation is 60 mm (2 3/8''). This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

DR2056-XXX-005;
DR2054-005;
Left opening shown

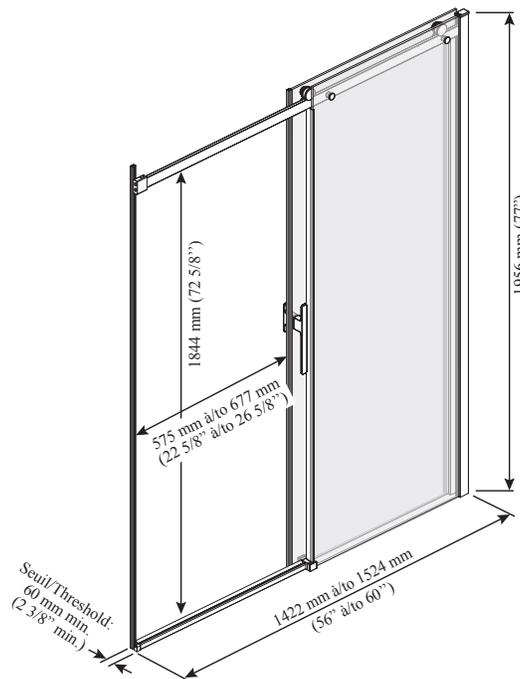

Important: Dimensions are approximated and are subject to changes. Please refer to the installation instructions.



ONCE UPON A TIME...WATER®

1355, 2nd Street, Industrial Park
Sainte-Marie (Québec)
Canada G6E 1G9

T 418-387-9090
1-877-GO-KALIA (1-87- 465-2542)
F 418 387-9089

KaliaStyle.com