

Style That Works Better




MODEL NUMBER:

2064131 Serin Petite Single Control Monoblock
Lever handle. Metal Speed Connect® pop-up drain.

AVAILABLE ACCESSORY:

□ 2064101P Escutcheon Plate Only

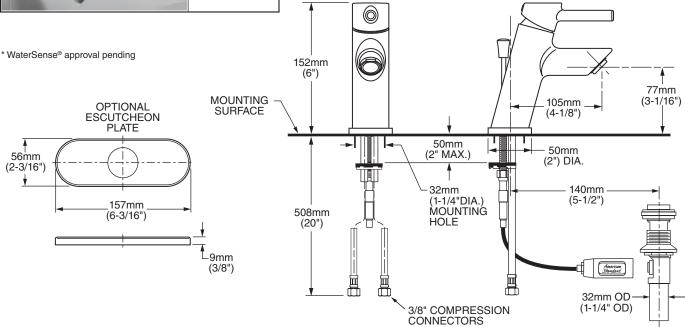

GENERAL DESCRIPTION:

Brass body. Washerless 35mm ceramic disc valve cartridge. Braided flexible supply hoses with 3/8" compression connectors. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32mm) tail piece. 1.25 gpm/5.7L/min. maximum flow rate. Faucet can be mounted on 4" (102mm) centers using optional escutcheon (2064.101P) or single hole mounting method.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Exclusive Speed Connect Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Choice of Finishes: Available in Polished Chrome or Satin Nickel (PVD).

SUGGESTED SPECIFICATION:

Single control bathroom faucet shall feature a brass body and metal lever handle. Faucet shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge. Shall also feature a metal drain body with stainless steel cable actuation. Faucet shall be American Standard Model # 2064131.____.




SERIN® SINGLE CONTROL BATHROOM SINK FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 NSF 61/Section 9 and Annex G IAPMO (cUPC)



		Finish	Options
Product		Polished Chrome	PVD Satin Nickel
Number	Description	002	295
2064131	Serin Petite Single Control Monoblock. Metal Speed Connect® pop-up drain.		
2064101P	Optional Escutcheon Plate Only (For Mounting on 4" Centers)		

