



see what Delta can do™

SHOWER HEAD

■ 5-Spray Setting Shower Head

■ Push Button Diverter

FEATURES:

- H₂Okinetic® Shower Head
- Touch-Clean® Nozzles

STANDARD SPECIFICATIONS:

- Maximum 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Change spray modes with push button
- ABS shower head with five spray settings – pause is a non-positive shut-off
- Metal ball connector for durability, easy installation
- Ball connector swivel angle is 44° (22° per side)
- Standard 1/2"-14 NPT pipe fitting


WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH


- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

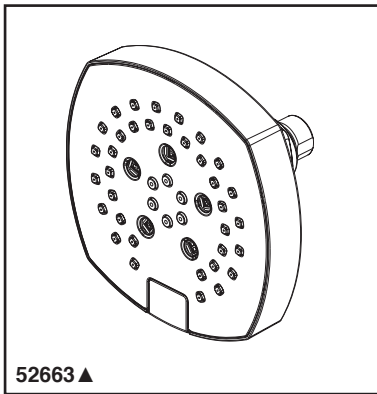

52663▲

Submitted Model No.: _____

Specific Features: _____

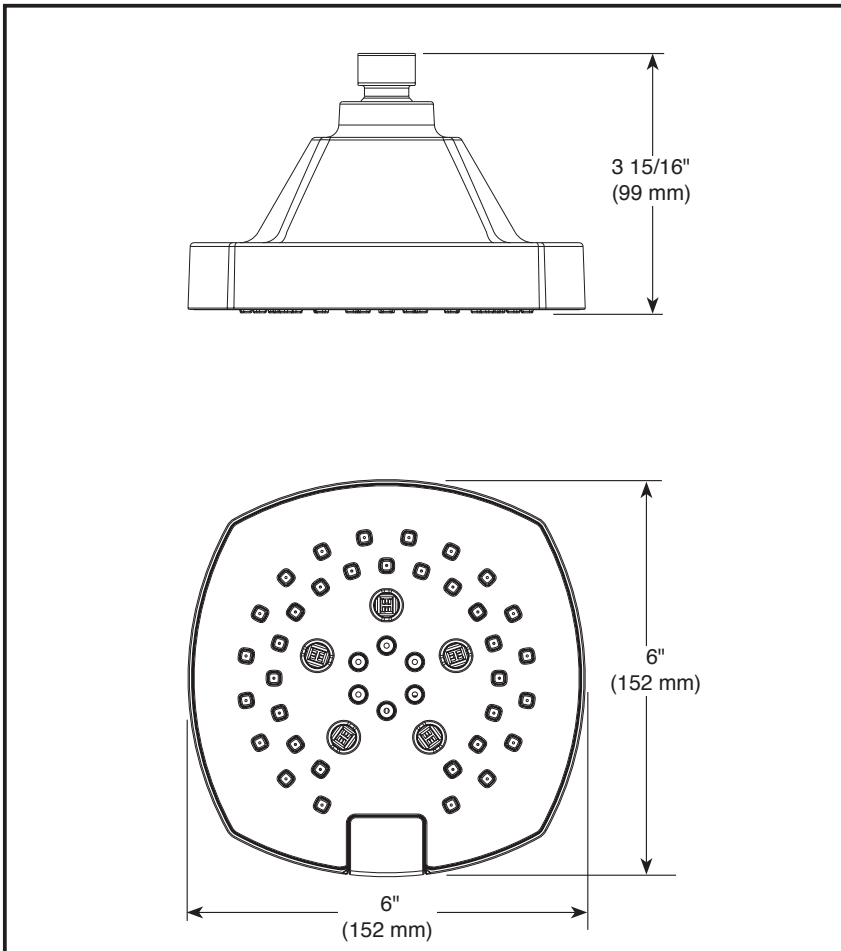

▲ Designate proper finish suffix

Spray Pattern



H₂Okinetic®
Spray



Full Body
Spray



Massage
Spray



Full Spray
w/ Massage



Pause

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-52663 Rev. A

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2018 Delta Faucet Company