


Submitted Model No.: Specific Features:



▲ Designate proper finish suffix

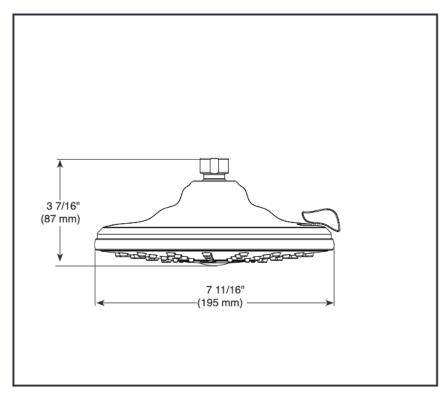

see what Delta can do

# H, OKINETIC SĤOWER HEAD

■ 3-Spray Setting Shower Head

## **FEATURES:**

- Touch-Clean® Nozzles
- H<sub>2</sub>Okinetic® PowerDrench Spray
- Lumicoat™ Finish (-PR models only)
- Lumicoat<sup>™</sup> Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

- STANDARD SPECIFICATIONS

  Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Shower head with three settings pause is a non-positive shut-off
- Standard 1/2" pipe itting
- Easy-turn spray dial
- Metal ball connector

## WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®