



Buy it for looks. Buy it for life.®

**DESCRIPTION**

- Metal construction with various finishes identified by suffix
- Includes showerhead, arm, flange and diverter tub spout
- Includes red and blue temperature markings

**OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3° F

**FLOW**

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

**CARTRIDGE**

- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

**STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- **ADA** for lever handle

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations


# Specifications



**METHOD™ POSI-TEMP®  
Single-Handle Tub/Shower Trim Kit**

- Models:** T2801 series - valve trim only  
 T62801 (Bulk Packed 12 per carton)  
 T2802 series - shower trim only  
 T62802 (Bulk Packed 12 per carton)  
 T2803 series - tub/shower trim  
 T62803 (Bulk Packed 12 per carton)

- Valves:** 62300 series  
 2500 series

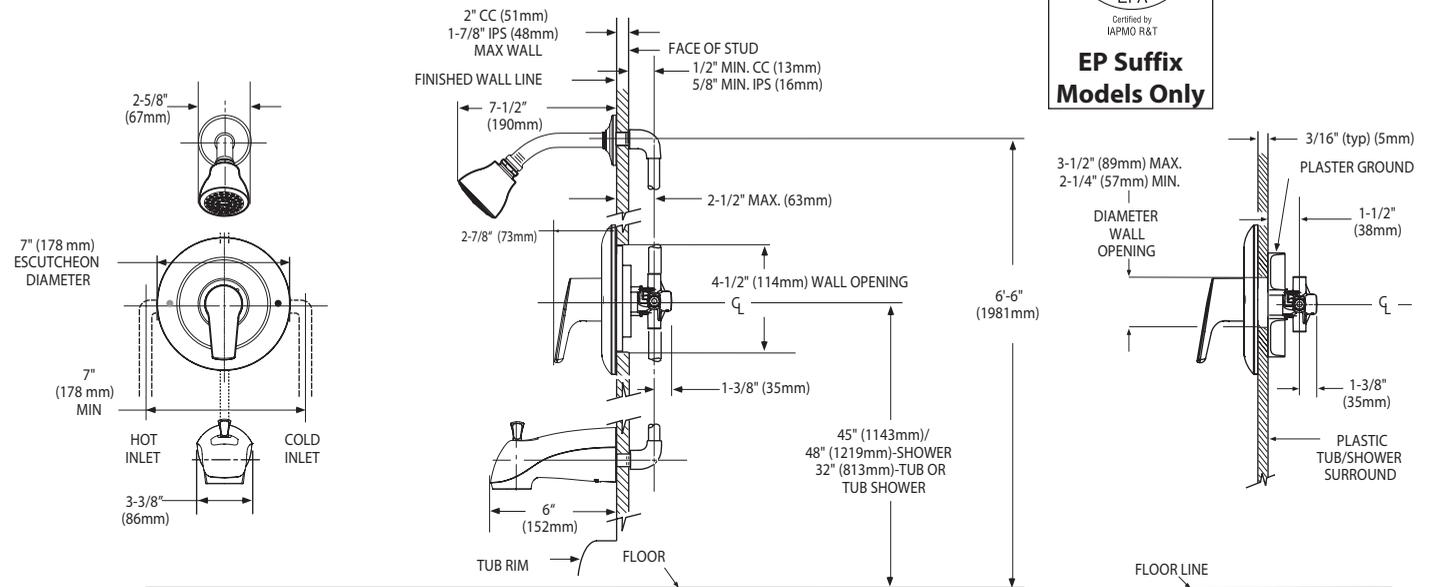

**CRITICAL DIMENSIONS**  
 (DO NOT SCALE)