



BF1524 1/2" Thermostatic Valve and Decorative Trim

SPECIFICATIONS

Features

- No visible screws
- 1/2" male inlet NPT threaded or welded
- · Shut-off valves included
- Total adjustment of 19 mm (3/4"
- Support for better stability during installation included
- Can be installed back-to-back
- Push-button diverter with automatic reset
- · Solid brass construction

Colors (Finishes)

• Chrome: BF1524-110

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 362mm x 184mm x 191mm (14 1/4" x 7 1/4" x 7 1/2")
- **Volume**: 0.45 cu ft (0.013 cu m)
- **Total weight**: 3.97 lb (1.8 kg)

Maximum flow rate

• 20 liters/min. (5.28 gallons/min.) at 60 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

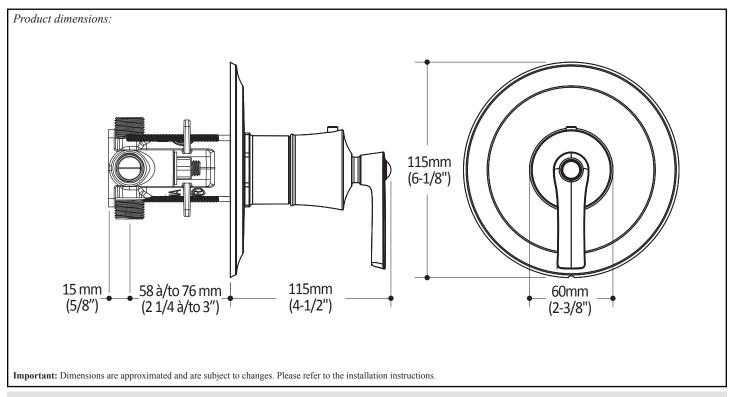



1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418-387-9089

KaliaStyle.com f ② ♯