

Neoroc® undermount double-equal kitchen sink w/rack K-8199

Features

- 36" minimum base cabinet width.
- Double-equal bowls.
- 9-1/2" depth provides generous workspace.
- Slim divide creates more space while allowing you to completely submerge pots and pans.
- Rear drains increase workspace in the sink and storage space underneath.
- Includes K-5656 sink rack.
- Includes cutout templates and installation clips.

Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Matte finish offers rich, dimensional color.
- Solid color throughout the sink.
- Heat-resistant up to 750°F.
- Scratch, stain, chip, and thermal-shock resistant.

Installation

- Undermount.
- Easy to install in a one-person, single-day project.

Recommended Products/Accessories

K-5656 Sink Rack

K-8801 Sink drain and strainer with tailpiece

K-8799 Sink drain and strainer basket

K-23726 Drain treatment

K-23730 Neoroc® cleaner

Optional Products/Accessories

K-11352 Disposal Flange with Stopper

K-9000 P-Trap

Included Components

Product consists of:

K-5656 Sink Back



Codes/Standards

CSA B45.5/IAPMO Z124

KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|------------------|
| | CM6 | Matte White |
| | CM7 | Matte Graphite |
| | CM5 | Matte Beige |
| | CM8 | Matte Black Plum |
| | CM1 | Matte Black |
| | CM2 | Matte Brown |
| | СМЗ | Matte Taupe |
| | CM4 | Matte Grey |
| | | |





Neoroc® undermount double-equal kitchen sink w/rack K-8199

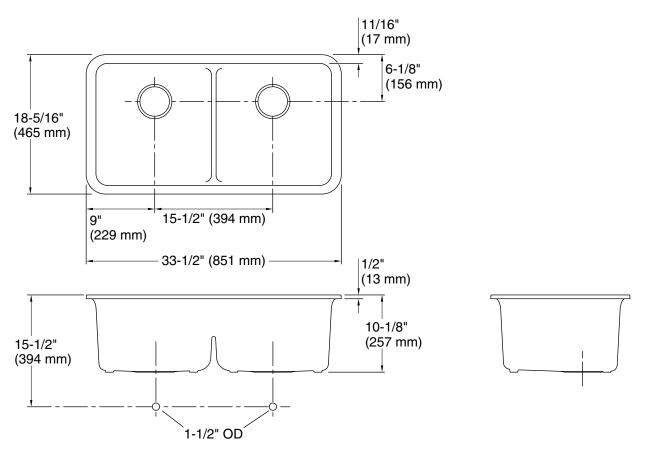

Technical Information

All product dimensions are nominal.

Bowl configuration: Double equal Installation: Under-mount Min. base cabinet 36" (914 mm)

width:

Bowl area (Left): Length: 14-7/8" (378 mm)

Width: 15-3/16" (386 mm) Bowl depth: 9-1/2" (241 mm) Water depth: 9-1/2" (241 mm) Length: 14-7/8" (378 mm)

Bowl area (Right): Length: 14-7/8" (378 mm)

Width: 15-3/16" (386 mm) Bowl depth: 9-1/2" (241 mm) Water depth: 9-1/2" (241 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1256394-7, required, included

Notes

Install this product according to the installation instructions.

