

### GELCOAT



**Model GR603R with 3063L/R Side Walls and 3663 Back Wall**

#### Model GR603L/R Receptors

**Length:** 59 7/8" (1521 mm)

**Width:** 31 3/8" (797 mm)

**Height:** 21 3/8" (543 mm)

#### Model GR603L/R Receptors with 3063L/R side walls and 3663 back wall

**Length:** 59 7/8" (1521 mm)

**Width:** 31 3/8" (797 mm)

**Height:** 79 3/16" (2011 mm)

**Receptor Shipping Weight:** 66 lbs. (30 Kg)

**Wallset Shipping Weight:** 125 lbs. (57 Kg)

**Materials:** Gelcoat finish reinforced with fibreglass.

A full size five foot receptor that can fit in a standard five foot pocket. Ideal for replacement of steel enameled baths or in new construction. This unit features a generous seat for added comfort. Combining the GR603 receptor with the System Connects Wallset (3063L/R side walls and 3663 back wall) creates the complete shower unit.

#### Standard Features:

- Easy to clean high gloss surface
- Chip and mar resistant
- Moulded-in floor pattern

#### Colours:

- Standard: White, Almond (Bone) or Biscuit.
- Optional: Kohler Colours

All products manufactured by Hytec are covered by a comprehensive five-year limited warranty from the date of sale to the original owner. See the Hytec Bathing Fixtures List Price Book for further details.


#### Hytec Plumbing Products

(Division of Kohler Canada Co.)

4150 Spallumcheen Dr, Armstrong BC V0E 1B6

Ph. (800) 871-8311 (250) 546-3196 Fax (250) 546-3170

### GELCOAT

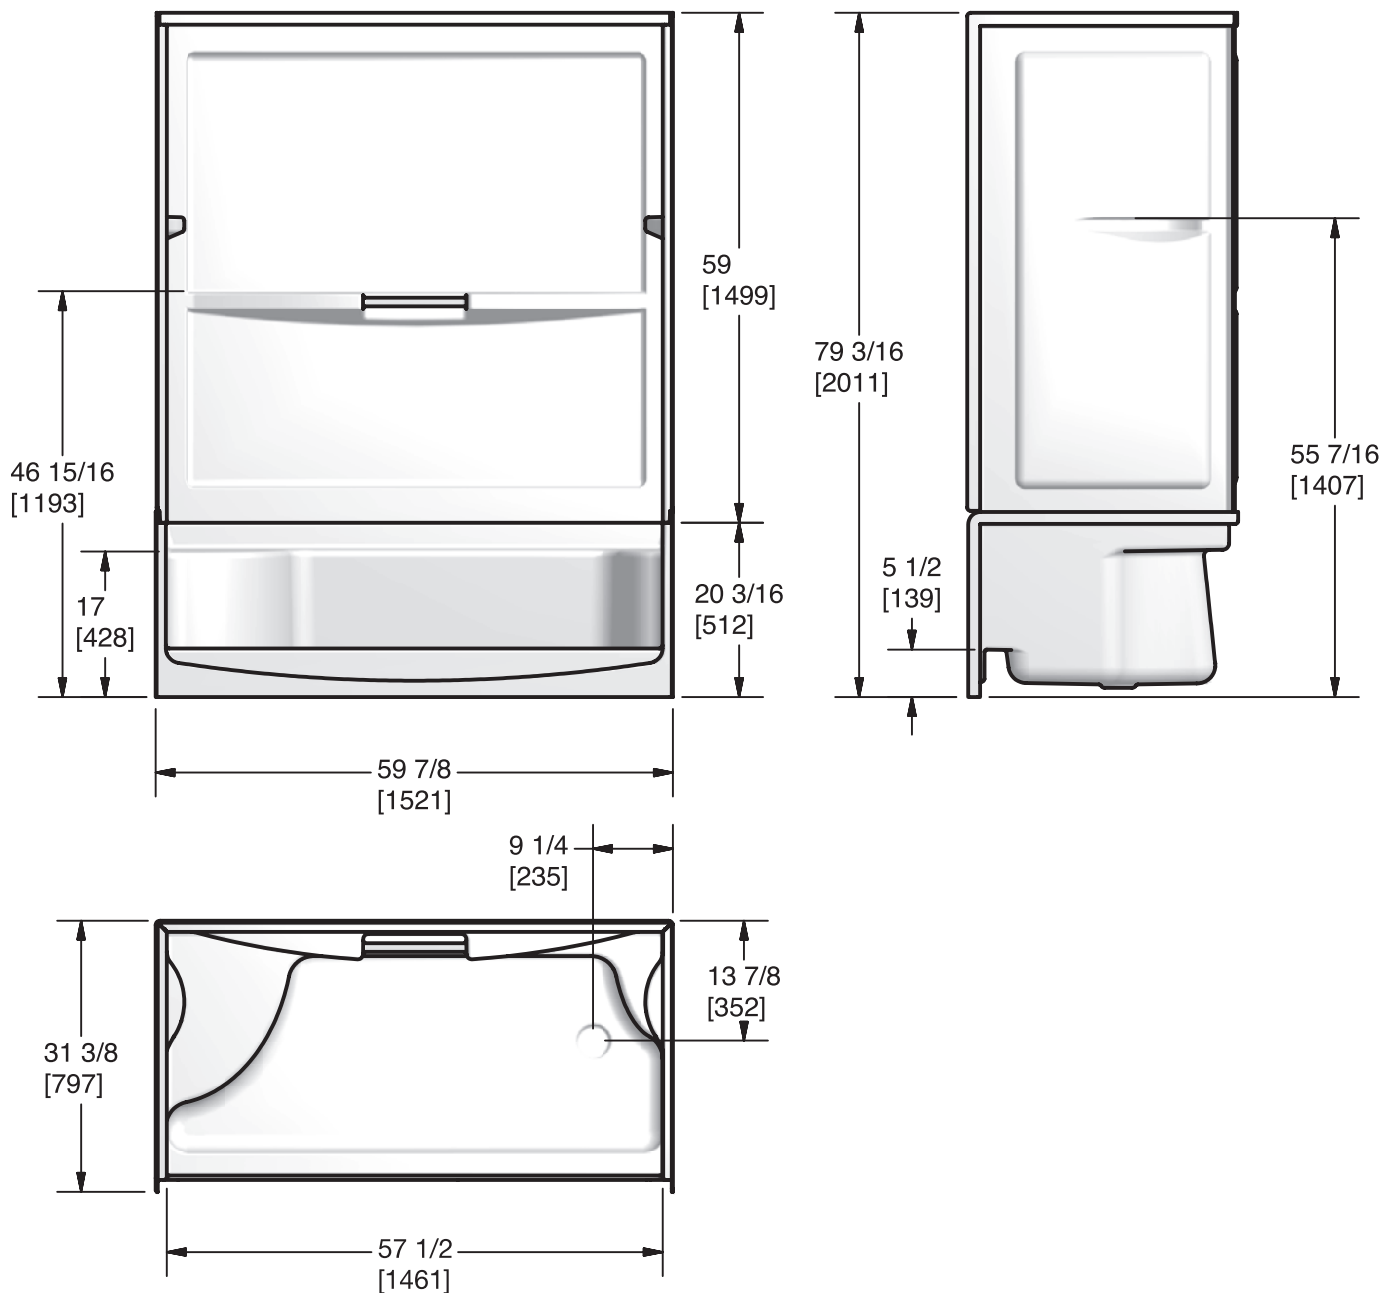

Measurement tolerances  $\pm 1/4"$  (6.3 mm)

All bathing fixtures comply with the applicable Canadian Standards.

For installation procedures, please refer to instructions included with each unit.

This sheet approximately describes products and equipment manufactured or supplied by Hytec Plumbing Products. Because of ongoing efforts to improve both design and quality, products and equipment actually furnished may differ without prior notice.



#### Hytec Plumbing Products

(Division of Kohler Canada Co.)

4150 Spallumcheen Dr, Armstrong BC V0E 1B6

Ph. (800) 871-8311 (250) 546-3196 Fax (250) 546-3170