



UT445U(V)

0.125GPF High-Efficiency Washout Urinal

FEATURES

- Full size urinal with concealed integral trap
- Washout flush action with 3/4" top or back spud inlet
- 0.125 GPF with any TOTO flush valve shown below
- Complete with low profile dome strainer

MODELS

- UT445U
Urinal with 3/4" top spud inlet
- UT445UV
Urinal with 3/4" back spud inlet

ADDITIONAL ITEMS

FLUSH VALVES EcoPower®	
TEU1UA12#CP	0.125GPF
TEU2UA11#SS	0.125GPF
TEU3UA11#SS	0.125GPF

COLORS/FINISHES

- #01 Cotton

PRODUCT SPECIFICATION

The wall-mounted, ADA compliant, high-efficiency washout urinal shall be 0.125GPF/0.473LPF when paired with a TOTO 0.125GPF flushometer valve. Urinal specified shall be TOTO Model UT445U__.

Flush valve specified shall be
TOTO Model _____.



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, CALGreen Title 24, California Energy Commission Standards
- ADA compliant



UT445U(V)

0.125GPF High-Efficiency Washout Urinal


SPECIFICATIONS

• Water Use	0.125GPF/0.473LPF
• Flush System	Washout flush action
• Warranty	One Year Limited Warranty
• Material	Vitreous china
• Min. Water Pressure	15 psi (flowing)
• Height (Urinal Only)	26"
• Width	17-3/4"
• Rim	14-1/4"
• Shipping Weight	UT445U(V) - 60lbs
• Shipping Dimensions	UT445U(V) 29" L x 18" W x 16" H

INSTALLATION NOTES

Ultra-low high efficiency urinals require a system with a minimum 2% slope. Maximum drainage capacity rated at 6.6 gal/min (25 L/min). Adjust angle stop accordingly to prevent overflow. Confirm with local codes and standards for floor drain requirement.

UT445U

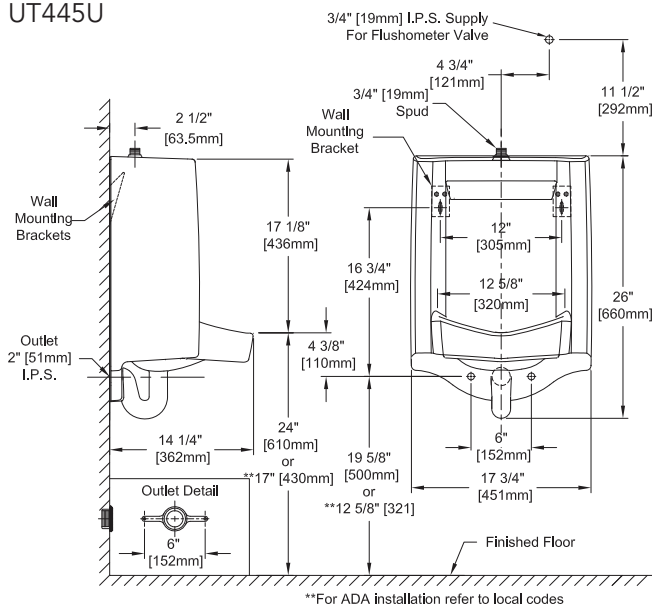

UT445UV

