PROMIXTM



BF1370

External thermostatic shower system

SPECIFICATIONS



Components included

• 102845 : 2-jet handshower

102849 : Wallbar

• 101620 : 60" flexible and soft PVC hose

• BF1216: Promix 1/2" external thermostatic valve

Colors (Finishes)

• Chrome: BF1370-110

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.



102845

STANDARD: 2-Jet Handshower

SPECIFICATIONS

Features

- Dimension: 102mm (4")
- Anti-scale system with soft sprays
- Water G1/2 male inlet
- 2 direct positions and 1 shared position
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

Chrome: 102845-110

Brushed Nickel PVD: 102845-120

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- **Volume**: 0.12 cu ft (0.003 cu m)
- **Total weight**: 0.62 lb (0.28 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

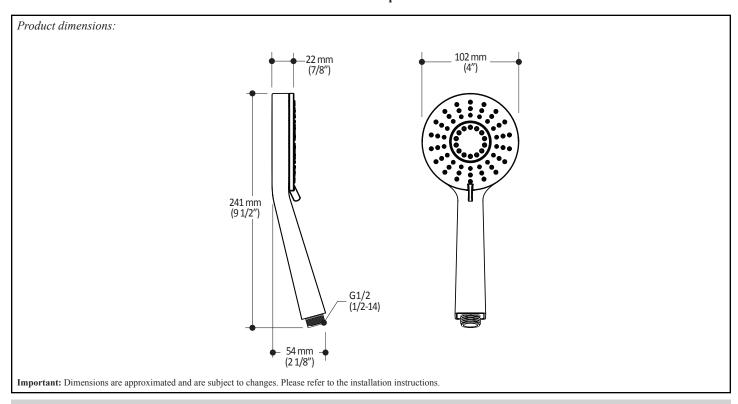

Kalia inc. 1355, 2nd Street

Sainte-Marie (Quebec) Canada G6E 1G9

t. 1-418-387-9090 1 877 GO KALIA (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com



102849

Wallbar for Handshower

SPECIFICATIONS

Features

- Total height of 673mm (26 1/2 ")
- Locking system of 1/4 turn

Colors (Finishes)

• Chrome: 102849-110

Packaging

• **Dimensions**: 832mm x 152mm x 89mm (32 3/4" x 6" x 3 1/2")

Volume: 0.40 cu ft (0.011 cu m)
Total weight: 1.54 lb (0.7 kg)




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

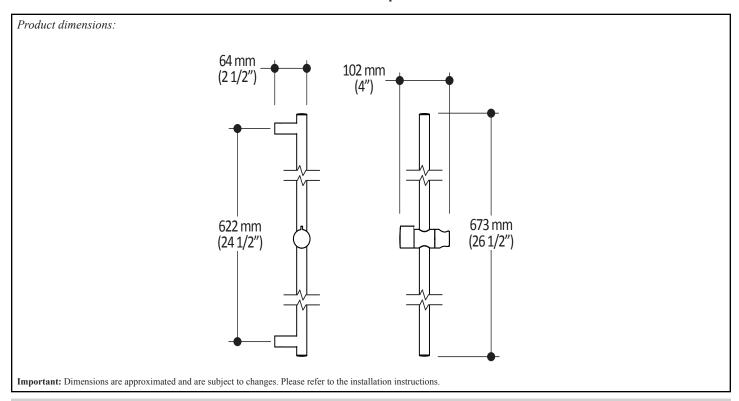

Kalia inc.

1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 t. **1-418-387-9090 1 877 GO KALIA** (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com

PROMIXTM



BF1216

External thermostatic valve

SPECIFICATIONS

Features

- Solid brass construction
- Total adjustment of 38mm (1 1/2")
- · On/Off Ceramic disc cartridge
- Water supply inlet 1/2" NPT
- · Check valves included
- Kalia SensaCool system:
 - Minimizing risk of scalding



Flow rate

Packaging


(14" x 7" x 7 1/2")

• 21.6 liters/min. (5.7 US gallons/min.) at 60

Dimensions: 356mm x 178mm x 191mm

Volume: 0.43 cu ft (0.012 cu m)

Total weight: 4.6 lb (2.1 kg)



Colors (Finishes)

• Chrome: BF1216-**110**

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1

MASS




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

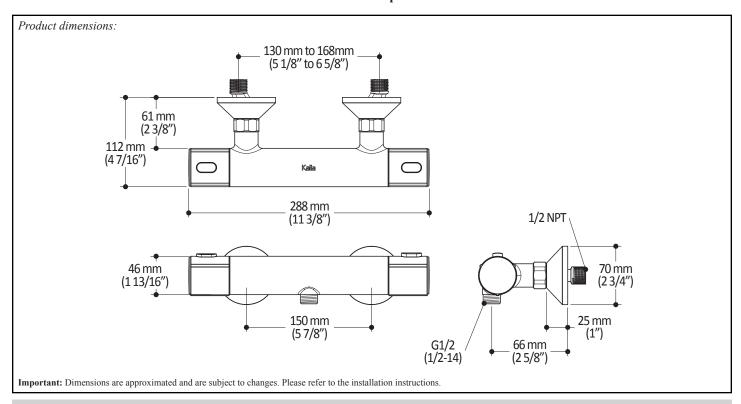

Kalia inc.

1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 t. **1-418-387-9090 1 877 GO KALIA** (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com