

Aquia® IV 1G® Close Coupled Toilet, 1.0 & 0.8 GPF

FEATURES

- DynaMax™ Tornado Flush® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.0 & 0.8 GPF (3.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Specially designed to accommodate a WASHLET®+
- Elongated front bowl, seat and tank set
- Chrome push-button
- 12" Rough-in

MODELS

- **MS446124CUMGA** (#01, #12, #03, #11)
With CEFIONTECT ceramic glaze and Auto Flush, includes seat SS124
- **MS446124CUMG** (#01, #12, #03, #11)
Same as above but without Auto Flush
- **MS446124CUM** (#51)
Without CEFIONTECT ceramic glaze & includes seat SS124

COMPONENTS

- **CT446CUGT40**
Elongated bowl with CEFIONTECT
- **CT446CUT40**
Elongated bowl without CEFIONTECT
- **ST446UMA**
Tank and cover only
- **SS124**
SoftClose Seat

Optional Components

- **SS234**
SoftClose Seat
- **TSU08W.10**
10" Unifit Rough-In
- **TSU08W.14**
14" Unifit Rough-In
- **9AU321-A**
WASHLET® adapter
(Required for WASHLET installation)

COLORS/FINISHES

- #01 Cotton
- #12 Sedona Beige

Made to Order

- #03 Bone
- #11 Colonial White
- #51 Ebony
(Without CEFIONTECT)



1G One Gallon

DF DynaMax Tornado Flush

CE CEFIONTECT

SD Skirted Design

PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DynaMax Tornado Flush toilet shall be dual flush 1.0 GPF/0.8 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model MS446124CUM_____.

CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



MS446124CUMG(A)

Aquia® IV 1G® Close Coupled Toilet, 1.0 & 0.8 GPF


SPECIFICATIONS

| | |
|----------------------------|--|
| Water Use | 1.0 & 0.8 GPF (3.8 & 3.0 LPF) |
| Flush System | DynaMax™ Tornado Flush® |
| Min. Water Pressure | 8 psi (Flowing) |
| Water Surface | 5-5/8" x 4-1/8" |
| Trap Diameter | 2-1/2" |
| Rough-in | 12" (10" & 14" Optional) |
| Trap Seal | 2-1/8" |
| Warranty | One Year Limited Warranty |
| Material | Vitreous China |
| Shipping Weight | CT446CU(G)T40 85 lbs ST446UMA 29 lbs |
| Shipping Dimensions | CT446CU(G)T40 30-3/4" L x 17-3/8" W x 20-1/2" H ST446UMA 17-1/4" L x 7-7/8" W x 17-1/2" H |

INSTALLATION NOTES

Back-to-Back Toilet Installations:


TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

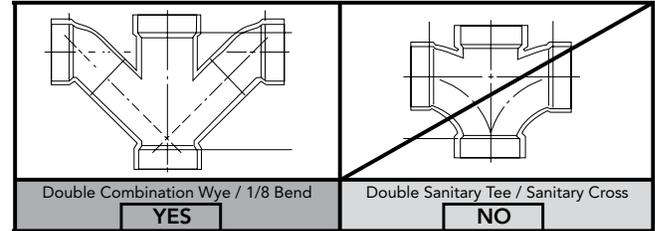

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

Ultra-low high efficiency toilets require a system with adequate supplemental flows from other water usage fixtures and a 4" ID drainline with minimum 2% slope and maximum linear runs of 60ft.

DIMENSIONS

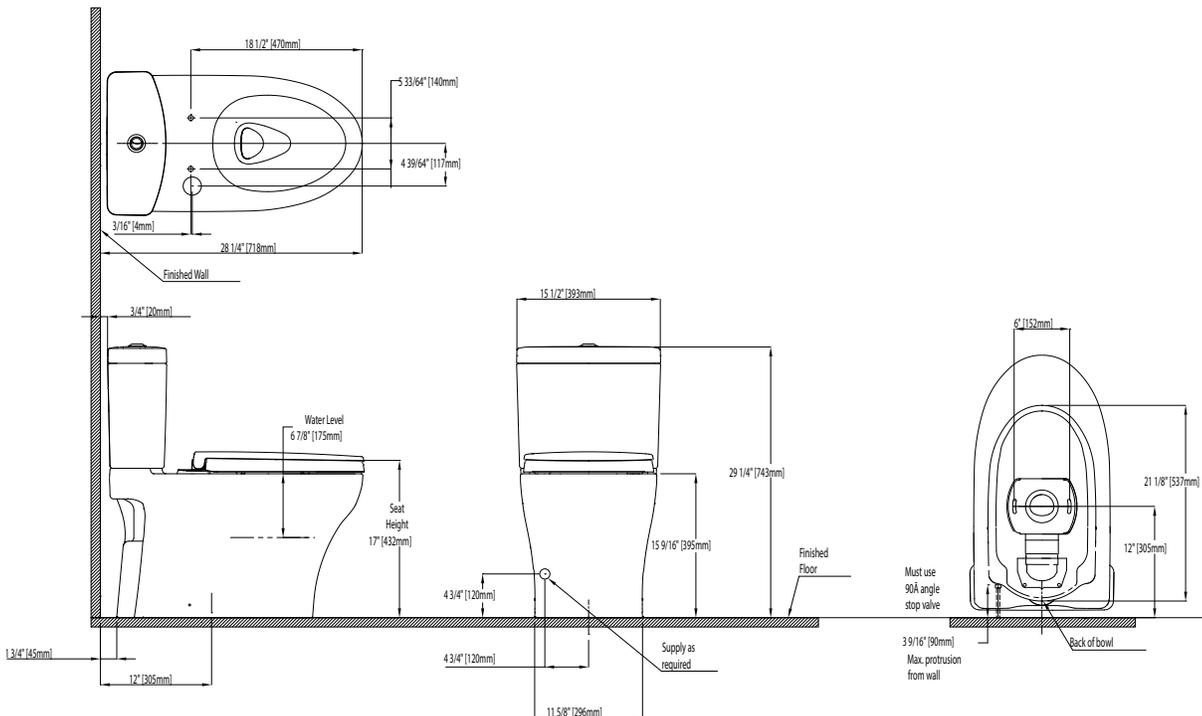

TOTO®

These dimensions and specifications are subject to change without notice

Ph: (888) 295-8134 | Fax: (800) 699-4889 | www.totousa.com | © TOTO USA

SS-01321 v.03