

Shift®+ Square

1.75 gpm multifunction handshower K-21336-G

Features

- Multifunction handshower offers full coverage and targeted massage spray settings.
- Ergonomic design is comfortable and easy to grip.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- 1.75 gpm (6.6 lpm) flow rate.
- Contains flow-regulating check valve for backflow prevention.

Water Conservation & Rebates

 This product can help a building earn Water Efficiency points in LEED[®] Green Building Rating System.

Required Products/Accessories

K-8593 72" Shower Hose

K-9069 24" shower slidebar

or

K-9069 24" shower slidebar K-9514 60" Shower Hose

or

K-14791 wall-mount handshower holder with supply elbow K-8593 72" Shower Hose

or

K-14791 wall-mount handshower holder with supply elbow K-9514 60" Shower Hose

or

K-14789 deck- or bath-mount handshower holder with hose

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

K-9660 Vacuum Breaker





Codes/Standards ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) OBC

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description SN Vibrant® Polished Nickel ΒN Vibrant® Brushed Nickel Vibrant® Brushed Bronze BV 2BZ **Oil-Rubbed Bronze** BL Matte Black Vibrant® Brushed Moderne 2MB Brass RGD Vibrant Rose Gold TT Vibrant Titanium

Shift®+ Square

KOHLER, Faucets

1.75 gpm multifunction handshower K-21336-G

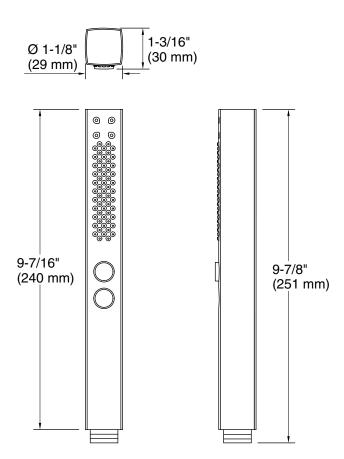

Technical Information

All product dimensions are nominal.

Drain included: No

Handshower:

Rated maximum
flow:1.75 gal/min (6.6 l/min)
80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less. Install this product according to the installation instructions.

Plumbing codes may require that a vacuum breaker be installed in-line to handshowers. Please consult local plumbing codes.

OBC compliant when installed to the specific requirements of these regulations.

