


Submitted Model No.: Specific Features:

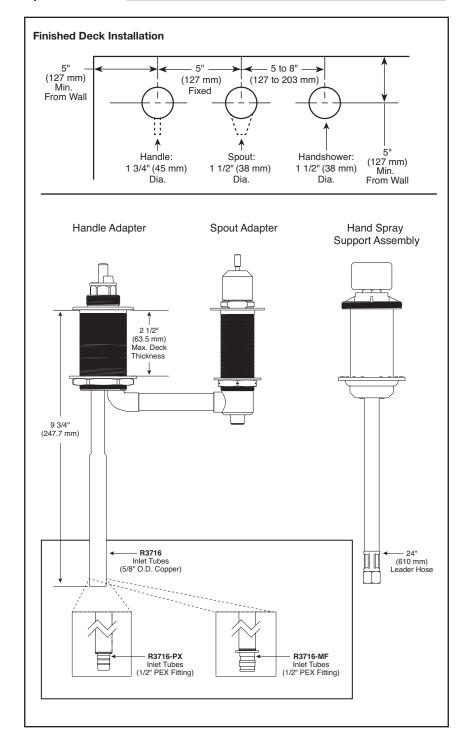

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only.

# **A** DELTA

## ROMAN TUB **ROUGH-IN KIT**

- Single Handle Roman Tub Faucet with Hand Shower
- Three Hole Installation
- Adjustable Rough-In for Thin or Thick Deck Installations
- Rough-In Must be Installed on Finished Deck
- Temperature Controlled with Handle
- Fixed 5" (127 mm) Centers for Handle Body to Spout Body
- Trim Kit Must Also be Ordered to Complete Installation

## STANDARD SPECIFICATIONS:

- Washerless.
- 10 gpm at 60 psi (37.9 L/min at 414 kPa).
- Adjustable to 2 1/2" maximum deck thickness.
- Handle needs to be installed on left and facing forward.
- Must be installed on finished deck. Tiling must be completed prior to installation of rough-in.
- All holes must be drilled at a 90° angle to the deck surface.
- Fixed 5" (127 mm) between handle and spout.
- Flexible 5-8" (127 to 203 mm) between hand shower and spout.
- 5/8" O.D. Copper supply inlet / outlet tubes.
- Solid fabricated brass rough-in bodies.
- High-flow, brass, ceramic disk cartridge.
- Single handle temperature control.
- All operating parts are serviceable from the top (above deck).

- Rough-in must be installed so handle is on the left of the spout with the spout facing forward. Refer to M&I for
- Trim kit must also be ordered to complete installation. Refer to separate trim kit specifications to determine the best rough-in kit and handle spacing for your situation.

## **Pex Options:**

- PX designed for use with ASTM F1807 copper crimp rings and ASTM F876/F877 PEX tubing.
- MF designed for use with ASTM F1960 cold expansion fittings and ASTM F876/F877 PEX tubing.

## **WARRANTY**

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

## **COMPLIES WITH:**

• ANSI/ASME A112.18.1/CSA B125.1



