


Submitted Model No.: _____

Specific Features: _____



▲ Designate proper finish suffix

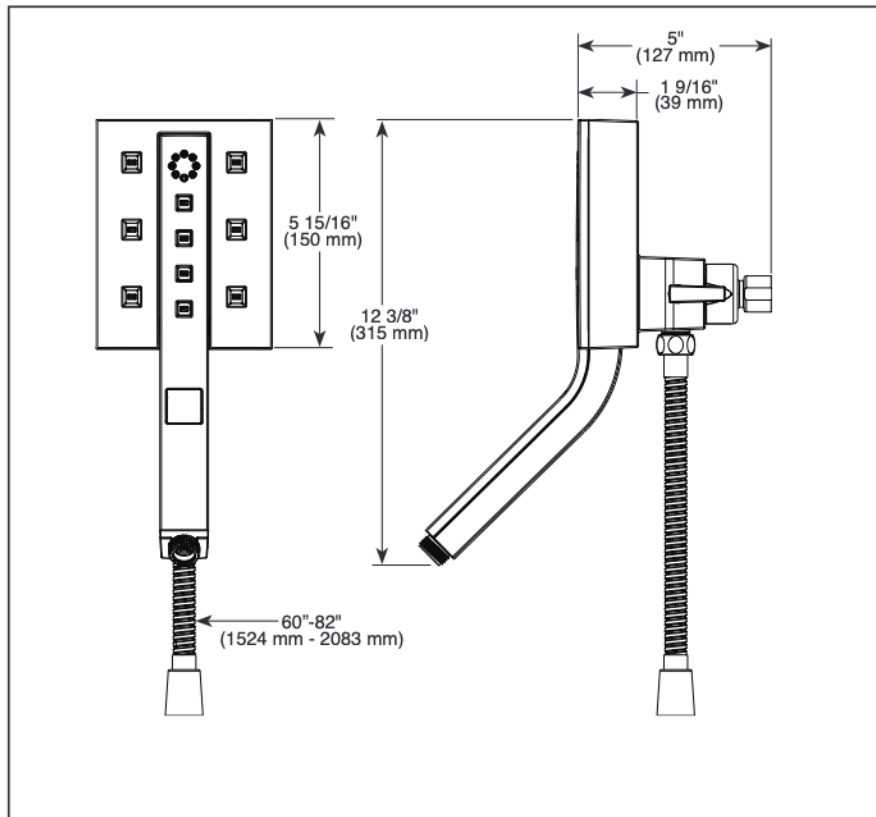

see what Delta can do™

IN2ITION®

- H₂Okinetic® 2-In-1 Shower
- 4 Spray Settings

FEATURES:

- H₂Okinetic® PowerDrench Spray
- Push Button Selection
- Certified Dual Check Valves
- MagnaTite® Docking
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Max. flow rate 1.75 gpm at 80 psi, 6.6 L/min @ 550 kPa (58473-▲ and 58473-▲-PR)
- Max. flow rate 2.5 gpm at 80 psi, 9.5 L/min @ 550 kPa (58473-▲25 and 58473-▲-PR25)
- Integrated handshower docks securely into showerhead when not in use
- 3-way diverter for extra spray options
- Fixed showerhead and handshower all in one
- Change spray modes with push button
- 60"-82" (1524 mm - 2083 mm) stretchable metal hose
- 4 spray settings - not a positive shut-off
- Lumicoat™ is not applied to the shower hose

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-58473 Rev. D

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2021 Delta Faucet Company