



Features

Meets requirements for efficiency rebates

Glowing ceramic ember base and logset

ILLUME  
CONTEMPORARY

SPECIFICATIONS  
AND FEATURES

ILLUME INSERTS  
CONTEMPORARY

30FID  
34FID

Coaxial  
Insert

QUICK DIMENSIONS

	30FID		34FID	
	UNIT	FRAM.	UNIT	FRAM.
F.WIDTH	29½	N/A	33½	N/A
B.WIDTH	19¾	N/A	23¾	N/A
HEIGHT	20	N/A	23¾	N/A
DEPTH	13½	N/A	14½	N/A
VIEWING	24¼ x 14½		28¾ x 18¾	

Standard

- Contemporary burner
- Full feature Proflame 2 remote control
- Black porcelain liner
- Halogen uplighting
- Battery backup for continuous operation
- Invisimesh screen

Options

- Propane conversion kit
- Remote controlled fans
- Square, oversized or 4 sided surround†
- Driftwood logset and speckled stones
- Glass media†

†Required to complete install



BTU LISTING

30FIDNIL-01 / 24,000  
30FIDLIL-01 / 23,000

34FIDNIL-01 / 31,000  
34FIDLIL-01 / 30,000


EFFICIENCY

30FIDNIL-01 / 77.6% P4  
30FIDLIL-01 / 79% P4

34FIDNIL-01 / 77.4% P4  
34FIDLIL-01 / 78.5% P4



## ILLUME DIMENSIONS

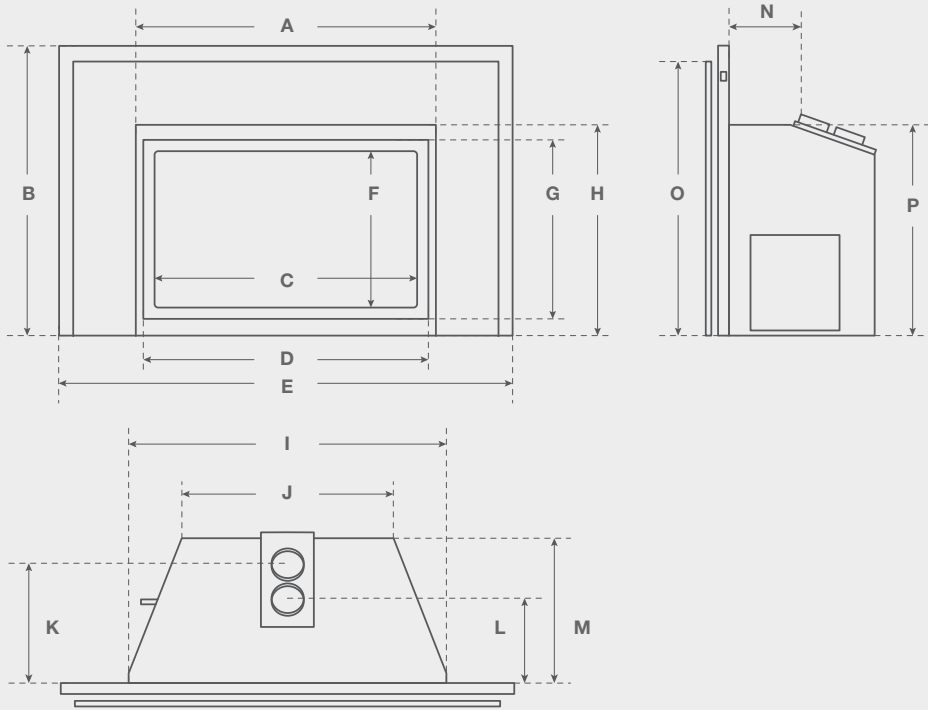

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
30FID	27 $\frac{3}{4}$	26 $\frac{7}{8}$	24 $\frac{1}{4}$	26 $\frac{1}{4}$	42	14 $\frac{1}{4}$	16 $\frac{5}{8}$	19 $\frac{1}{2}$	29 $\frac{1}{2}$	19 $\frac{7}{8}$	11 $\frac{1}{4}$	8	13 $\frac{1}{2}$	6 $\frac{3}{4}$	25 $\frac{3}{8}$	20
34FID	31 $\frac{3}{4}$	31	28	38 $\frac{3}{8}$	46 $\frac{1}{2}$	17 $\frac{1}{2}$	20 $\frac{1}{8}$	23 $\frac{3}{8}$	33 $\frac{1}{2}$	23 $\frac{3}{8}$	12 $\frac{3}{8}$	8 $\frac{5}{8}$	15	6 $\frac{3}{4}$	29 $\frac{1}{2}$	23 $\frac{3}{4}$



MONTIGO / ILLUME / 34FID / CONTEMPORARY



MONTIGO / ILLUME / 30FID / CONTEMPORARY



REMOTE<sup>Δ</sup>  
RXM5010



WALL REMOTE  
REC1493



BLACK PORCELAIN<sup>Δ</sup>  
PPL\*\*

<sup>Δ</sup> Standard on contemporary inserts

# Unit Specifications

## Icon Legend

AVAILABLE +

NOT AVAILABLE -

DEDICATED ◊

STANDARD ○

	BTU	Gas Supply Press. NG (shown in w.c.)	Venting	Front viewing area	Front glass type	Standard media	Powervent	Remote control	Fans	Uplighting	Downlighting
30FIDN-L-F [NG]	24,000	7	3"OUT 3"IN	24¼x 14¼	Neoceramic	None	-	○	+	○	-
30FIDL-L-F [Propane]	23,000	11	3"OUT 3"IN	24¼x 14¼	Neoceramic	None	-	○	+	○	-
30FIDN-S-F [NG]	24,000	7	3"OUT 3"IN	24¼x 14¼	Neoceramic	Traditional	-	○	+	-	○
30FIDL-S-F [Propane]	23,000	11	3"OUT 3"IN	24¼x 14¼	Neoceramic	Traditional	-	○	+	-	○
34FIDN-L-F [NG]	31,000	7	4"OUT 3"IN	28¾x 18½	Neoceramic	None	-	○	+	○	-
34FIDL-L-F [Propane]	30,000	11	4"OUT 3"IN	28¾x 18½	Neoceramic	None	-	○	+	○	-
34FIDN-S-F [NG]	31,000	7	4"OUT 3"IN	28¾x 18½	Neoceramic	Traditional	-	○	+	-	○
34FIDL-S-F [Propane]	30,000	11	4"OUT 3"IN	28¾x 18½	Neoceramic	Traditional	-	○	+	-	○

## ILLUME MASONRY CAVITY

	A	B	C	D	E
30FID	20	14	30	20	5
34FID	24	15	34	24	6

