

MOEN®

SPECIFICATIONS

DESCRIPTION

- Metal construction with various finishes identified by suffix.
- Single-Handle Lavatory Faucet, has brass construction with zinc, polymer, and steel components.
- Flexible supplies with 3/8" compression fittings.
- Includes spring loaded push button waste assembly.
- Optional 3 hole deck plate (escutcheon) available.

OPERATION

- Lever style handle.
- Temperature controlled by 100° arc of handle travel.
- Includes hot & cold temperature indicators.


FLOW

- Flow is limited to 1.2 gpm max (4.5 L/min) at 60 psi.

CARTRIDGE


- 1255™ Duralast™ cartridge.
- Nonmetallic/nonferrous and ceramic material.

STANDARDS

- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein including NSF61/9 & 372.
- Compliant with California water efficiency regulations.
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act.
- ADA  for lever handle.

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner.
 - 10 year limited warranty when used in a multifamily installation.
 - 5 years limited warranty when used in a commercial installation.
- Visit www.moen.com/support for complete details and limitations.



KYVOS™
Single-Handle Lavatory Faucet

MODELS: 6781 / 6781BL

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

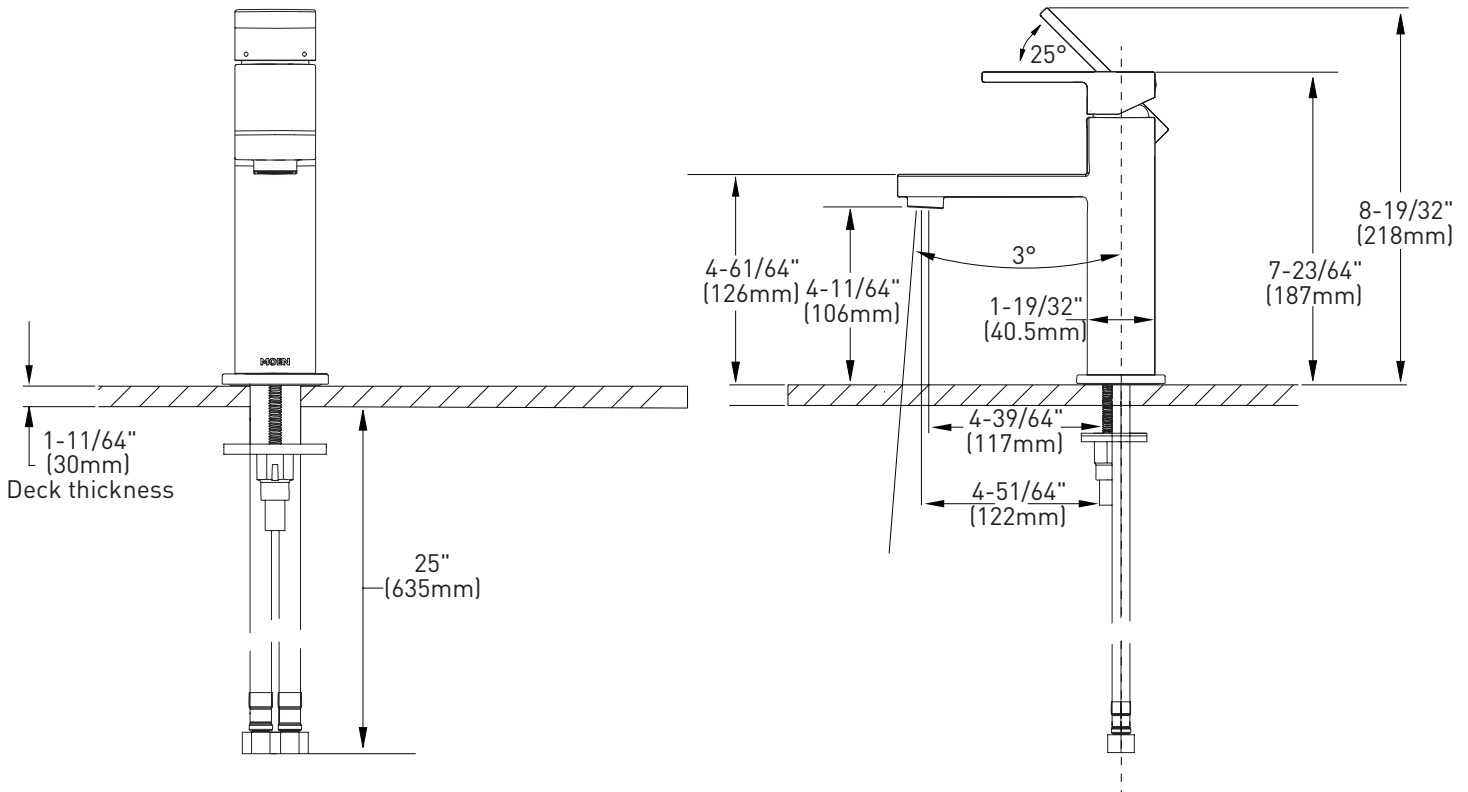

CRITICAL DIMENSIONS DO NOT SCALE