



SYMMONS Dia®

Location:

3502-CYL-B-TRM, 3502CYLBTRMTC

Tub/Shower Trim

Specification Submittal



Feature Highlights

- Dia Tub/Shower Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve
- Metal lever handle
- 7" diverter tub spout
- 1 mode showerhead
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3502CYLBTRMTC)
- Standard flow rate 2.0 gpm (7.6 L/min)

Model Numbers

- 3502-CYL-B-TRM**
Tub/Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve ordered separately
- 3502CYLBTRMTC**
Tub/Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)



Options/Modifications

- 1.5** **CG** **1.5 gpm (5.7 L/min) flow restrictor**
- 1.75** **1.75 gpm (6.6 L/min) flow rate restrictor**
- Delete Suffix B** **Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon**
- BBZ** **Brushed Bronze finish**
- MB** **Matte Black finish**
- STN** **Satin Nickel finish**

Note: Append appropriate -suffix to model number.

Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Dia Tub and Shower Trim _____ Includes Dia Tub and Shower Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve, Metal lever handle, 7" diverter tub spout, 1 mode showerhead, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3502CYLBTRMTC), Standard flow rate 2.0 gpm (7.6 L/min). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow rate restrictor", "Delete Suffix B - Chrome plastic escutcheon on valve with color graphic/indicators in place of standard brass escutcheon", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions

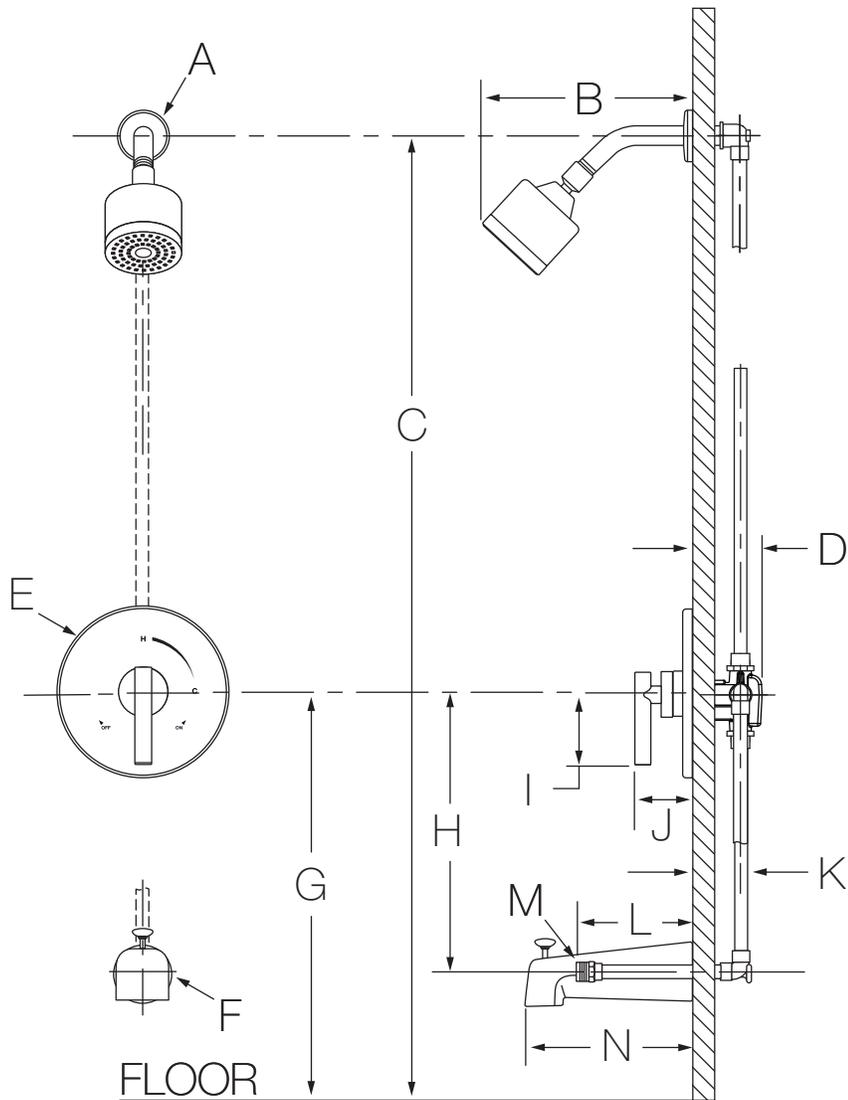

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 171 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 7-1/2", 191 mm
F	Ø 2-1/2", 64 mm
G	Ref. 32", 813 mm
H	Ref. 12", 305 mm
I	3", 76 mm
J	2-7/8", 73 mm
K	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
L	5-1/2", 140 mm
M	Male 1/2-14 NPT fitting must protrude 5-1/2" (140 mm) from finished wall
N	7", 178 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see K as reference).
- 4) Dimensions subject to change without notice.