# **MOEN**<sup>®</sup>

There is more than one version of this model. Page down to identify the version you have.

#### **FAUCET DESCRIPTION**

- · Versatile, hands-free convenience in the kitchen
- Power Clean<sup>™</sup> spray technology
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- · Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

#### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

#### **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**


• 1255™ Duralast™ cartridge

#### **STANDARDS**


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

#### WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

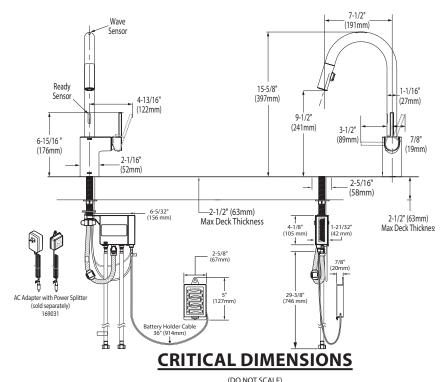

## **Specifications**



Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






#### **Close up view of Control Box**




#### **Battery Holder**



# **MOEN**<sup>®</sup>

# **Specifications**



### Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






#### **Close up view of Control Box**



## **Battery Holder**



#### **FAUCET DESCRIPTION**

- · Versatile, hands-free convenience in the kitchen
- Power Clean<sup>™</sup> spray technology
- Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- · Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- · Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

#### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- · Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

#### **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**


• 1255™ Duralast™ cartridge

#### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

#### WARRANTY

- · Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

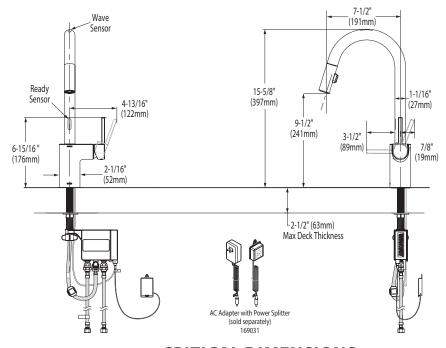


### **CRITICAL DIMENSIONS**

(DO NOT SCALE)

# **MOEN**<sup>®</sup>

# **Specifications**



### Align with MotionSense™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565E series


**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.

(OPTIONAL 3-HOLE ESCUTCHEON 141002 SERIES AVAILABLE)






#### **Close up view of Control Box**



**Battery Holder** 



#### **FAUCET DESCRIPTION**

- · Versatile, hands-free convenience in the kitchen
- Power Clean<sup>™</sup> spray technology
- · Allows users to control the faucet in 3 unique ways: Wave Sensor, Ready Sensor and familiar handle
- · Powered by 6 AA batteries or optional AC adapter with power splitter
- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- · Metal construction with various finishes identified by suffix
- Duralock™ quick connect
- Pulldown spray with 68" braided hose
- Control box flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pull down wand provides the maneuverability for cleaning or rinsing

#### **OPERATION**

- · Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- · Operates in stream or spray mode in the pulldown or retracted position
- Spout rotates 100 degrees

#### **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### **CARTRIDGE**


1255™ Duralast™ cartridge

#### **STANDARDS**

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA & for lever handle

#### WARRANTY

- Limited lifetime warranty against leaks, drips, finish defects to the original consumer purchaser
- 5 year warranty electronic operation defects to the original consumer purchaser
- 5 year warranty against leaks, drips, finish defects if used in commercial installations
- 1 year warranty against electronic operation defects if used in commercial installations

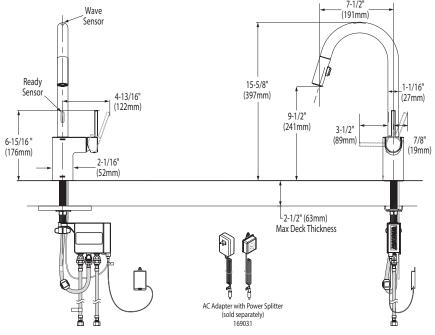

## **CRITICAL DIMENSIONS**

(DO NOT SCALE)