

Location:



9605-PLR, 9605-PLR-TRM, 9605-PLR-TRMTC
 Shower/Hand Shower Trim
Specification Submittal

Feature Highlights

- Origins Shower/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Shower Valve (included with 9605-PLR)
- Requires Symmons Dual Outlet Diverter Valve (included with 9605-PLR)
- Adjustable stop screw to limit handle turn (included with 9605-PLR)
- Metal lever handles
- ADA 36" grab bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower wand with non-positive shutoff
- 1 mode showerhead with easy to clean nozzles
- 2.0 gpm (7.6 L/min) flow restrictors
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9605PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Options/Modifications

- 1.5  1.5 gpm (5.7 L/min) flow restrictor
- L1 Less showerhead
- L2 Less hand shower wand
- L3 Less showerhead & hand shower wand
- L4 Less head, arm & flange
- L5 Less hand shower system
- L6 Less tub spout
- VP Vandal resistant escutcheon screws in place of standard screws
- STN Satin Nickel finish
- B Brass escutcheon (chrome only)
- X Integral service stops - allows water shut-off at valve for service

Note: Append appropriate suffix to model number.

Model Numbers

- 9605-PLR**
Shower/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve and Symmons Dual Outlet Diverter Valve
- 9605-PLR-TRM**
Shower/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve and Symmons Dual Outlet Diverter valve ordered separately
- 9605-PLR-TRMTC**
Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (9605-PLR only)
- WaterSense @ 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)
- (does not apply to L3 modification)



Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Origins _____ With Origins Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with 9605-PLR), Requires Symmons Dual Outlet Diverter Valve (included with 9605-PLR), Adjustable stop screw to limit handle turn (included with 9605-PLR), Metal lever handles, ADA 36" grab bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower wand with non-positive shutoff, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictors, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9605PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense @ 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: " 1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead" , "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm & flange", "L5 - Less hand shower system", "L6 - Less tub spout", "Vp - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

Dimensions

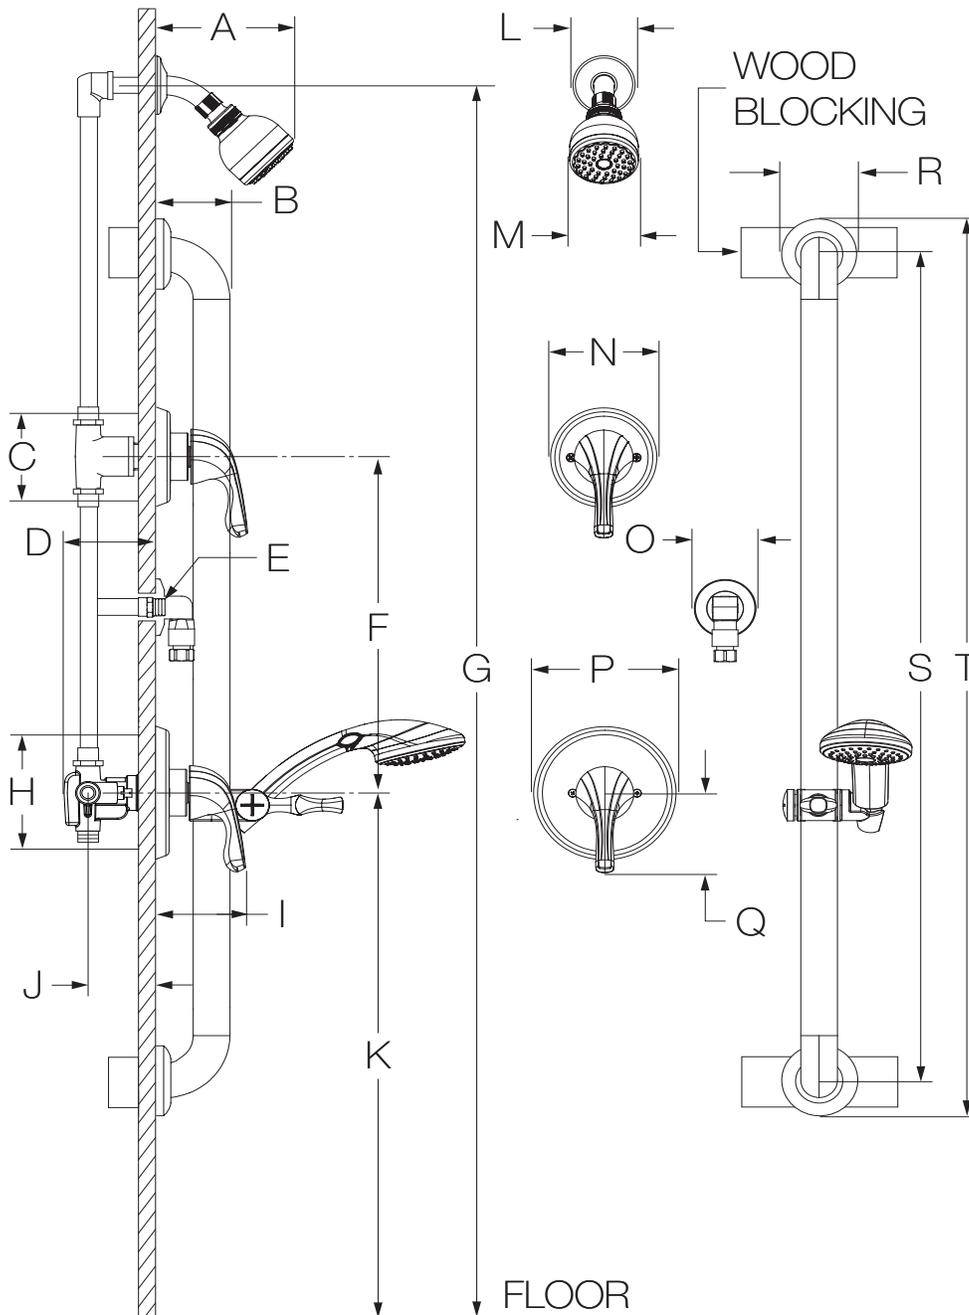

Measurements	
A	6-3/8", 162 mm
B	3", 76 mm
C	Diverter Valve Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm
D	3-1/2", 89 mm
E	Male 1/2" NPT fitting must protrude 3/8" from finished wall
F	Ref. 10", 254 mm
G	Ref. 77", 1956 mm
H	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
I	3-5/8", 92 mm
J	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
K	Ref. 42", 1067 mm
L	Ø 2-1/2", 64 mm
M	Ø 2-3/4", 70 mm
N	Ø 4-1/4", 108 mm
O	Ø 2-1/2", 64 mm
P	Ø 5-3/4", 146 mm
Q	3-3/8", 86 mm
R	Ø 3-1/8", 79 mm
S	36", 914 mm
T	39", 991 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.