



OVALYN UNDERCOUNTER SINK

- Vitreous china
- Unglazed rim for undercounter mount
- Front overflow
- Supplied with mounting kit (047194-0070A)
(Faucet shown not included)

0495 221 Unglazed Rim
435 x 359mm (17-1/8" x 14-1/8")

0495 300 Same as above with Glazed Underside

Bowl size:
382mm (15-1/16") wide,
306mm (12-1/16") front to back,
140mm (5-1/2") deep

0496 221 Unglazed Rim
489 x 413mm (19-1/4" x 16-1/4")

0496 300 Same as above with Glazed Underside

Bowl size:
432mm (17") wide,
356mm (14") front to back,
140mm (5-1/2") deep

0497 221 Unglazed Rim
546 x 441mm (21-1/2" x 17-3/8")

0497 300 Same as above with Glazed Underside

Bowl size:
483mm (19") wide,
384mm (15-1/2") front to back,
140mm (5-1/2") deep



To Be Specified

- Colour:
- Faucet*:
- Faucet Finish:
- Supplies & Stops:
- Trap 1-1/4" (32 mm):

* See faucet section for additional models available



- Countertop 864mm (34") from finished floor. Sink installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.
MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.


See reverse for roughing-in dimensions

COMPLIANCE CERTIFICATIONS –

- Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
 - CAN/CSA B45 Series.



0496/0497

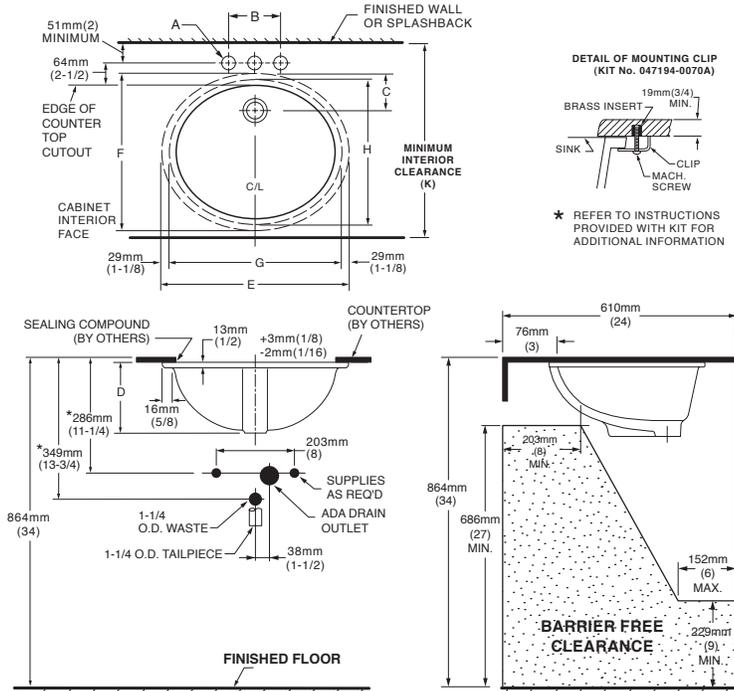

FAUCET	A	B
CENTRESET	1-1/8 (29mm)	4 (102mm)
SPREAD	1-3/8 (35mm)	8 (203mm)



Countertop 864mm (34") from finished floor.
Sink installed 51mm (2") from front edge of countertop.
Countertop thickness to be 25mm (1") maximum.


MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

NOTES:

- ** USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
- * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.
- ▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
- PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).** IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CAT. NO.	E	F	G	H	C	D	J	K
0496 221	489mm	413mm	432mm	356mm	103mm	182mm	16mm	500mm
0496 300	(19-1/4)	(16-1/4)	(17)	(14)	(4-1/16)	(7-3/16)	(5/8)	(19-11/16)
0497 221	546mm	441mm	483mm	391mm	95mm	191mm	19mm	534mm
0497 300	(21-1/2)	(17-3/8)	(19)	(15-3/8)	(4-1/4)	(7-3/8)	(3/4)	(21-1/16)

0495

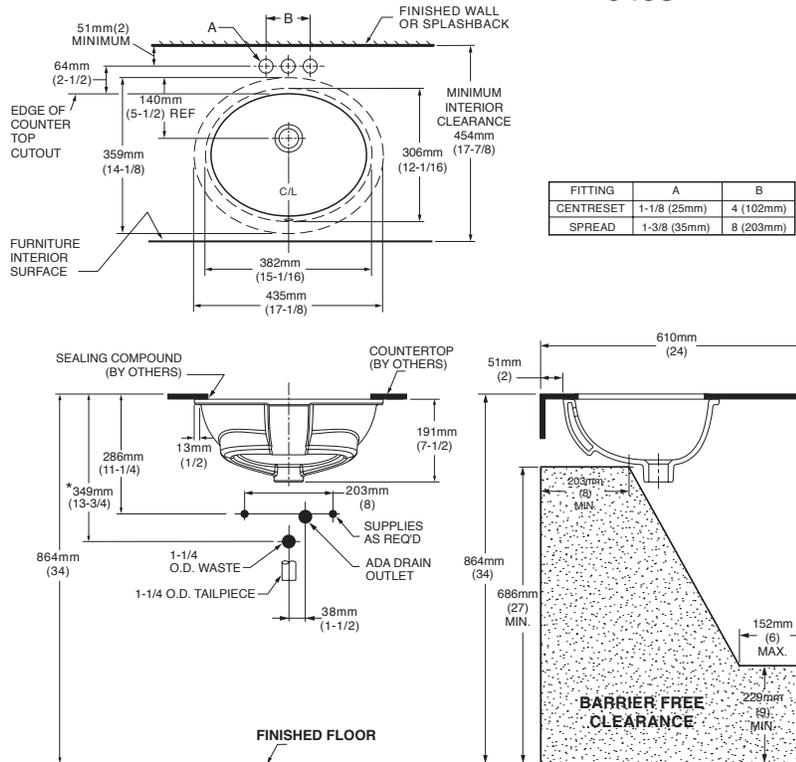

FITTING	A	B
CENTRESET	1-1/8 (25mm)	4 (102mm)
SPREAD	1-3/8 (35mm)	8 (203mm)