

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Adjustable temperature limit stop
- For use with a Posi-Temp® pressure-balancing valve
- Includes showerhead, arm and flange

OPERATION

- Lever style handle
- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^\circ$

FLOW

- Designed to deliver 1.75 gpm (6.6 L/min) at 45 psi
(for models manufactured after 3/1/18)
- Designed to deliver 2.5 gpm (9.5 L/min) at 45 psi
(for models manufactured before 3/1/18)

STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- Products marked with 1.75 gpm are compliant with WaterSense®, and with California water efficiency regulations
- **ADA**  for lever handle
- Meets WaterSense® criteria for EP suffix models and models after 10/2013
- Meets New York City Local Law No. 57 for EP suffix models and models after 10/2013

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




CALDWELL™ Single-Handle Shower

Models: 82495 series



(For EP suffix models and models after 10/2013)

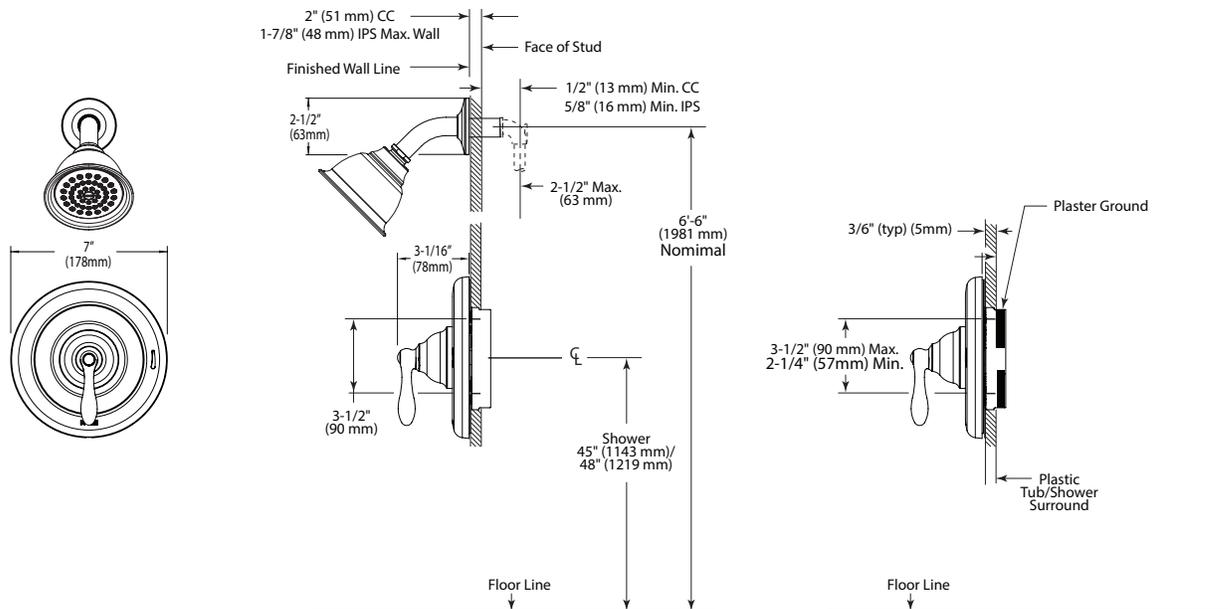

THICK WALL APPLICATION

THIN WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)