

Specifications



- · Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes Protégé® side spray
- Duralock™ Quick Connect System

OPERATION

- · Lever style handle
- Temperature controlled by 100° arc of handle travel
- Will operate with less than 5lbs. of force

FLOW

Aerator is limited to 1.5 gpm max (5.7 L/min)

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material


STANDARDS

- Third party certified to ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- · Certified to NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation


Visit www.moen.com/support for complete details and limitations



Manor™ Single-Handle Kitchen Faucet with Protégé® Side Spray in Deck Plate

Model: 87434

NOTE: DESIGNED TO INSTALL THROUGH 3 HOLES 1-1/4" (32mm) MIN. DIA. AND 4" (102mm) ON CENTER.

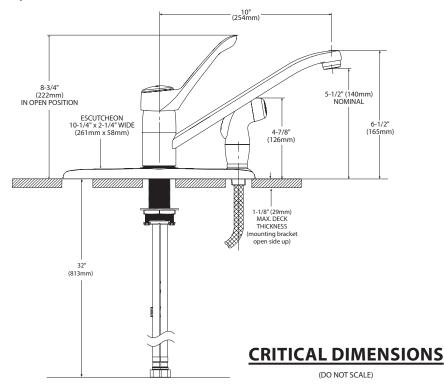

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

02/12017 SPC15231 5001002/6433 Released 00