



## Underscore® Rectangle

60" x 32" alcove bath  
K-20202-LA

### Features

- Convenient 19" step-over height retains the same depth as a standard 21" bath.
- Integral lumbar support.
- Slotted overflow allows for deep soaking.
- Integral apron creates a clean, finished look.
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation.
- Textured bottom surface.

### Material

- Acrylic.

### Installation

- Left drain.
- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Alcove.

### Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

### Recommended Products/Accessories

K-23726 Drain treatment

K-23732 Tub & shower cleaner



ADA

### Codes/Standards

CSA B45.5/IAPMO Z124

ASTM E162

ASTM E662

ADA

ICC/ANSI A117.1

### KOHLER® Plastic Baths and Receptors Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



0


White





## Underscore® Rectangle

60" x 32" alcove bath

K-20202-LA

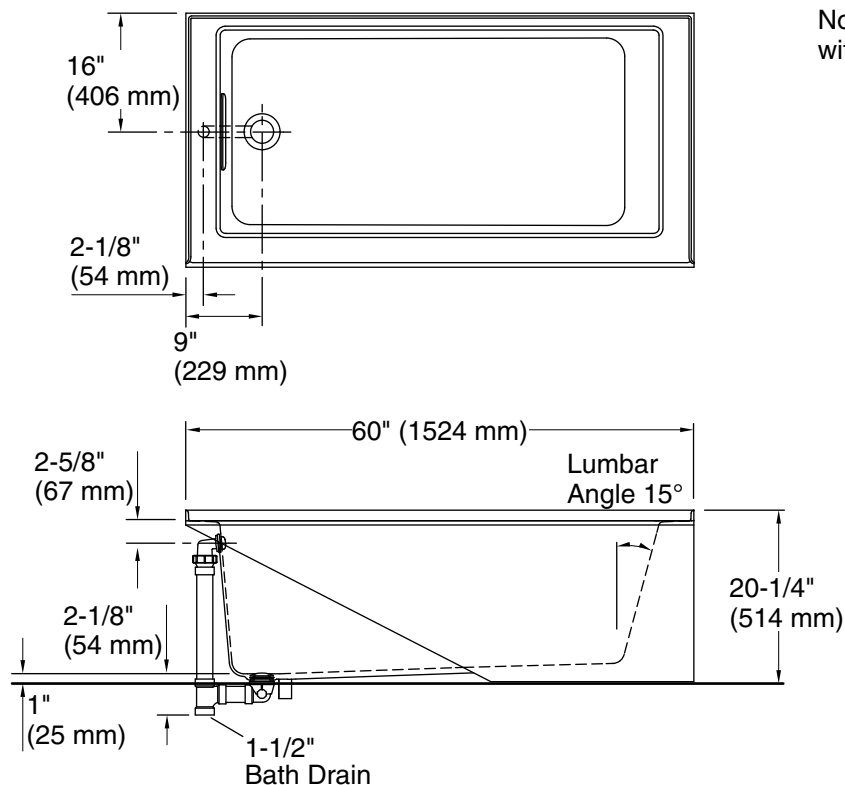

No change in measurements if connected with drain illustrated. (K-7272)

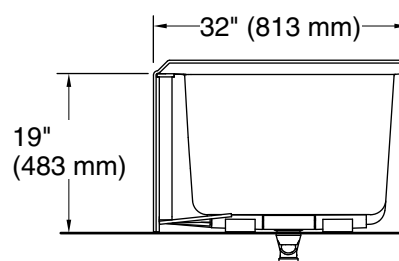

### Technical Information

All product dimensions are nominal.

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Installation:          | Three-wall alcove                                 |
| Drain location:        | Left                                              |
| Basin area, bottom:    | 46-1/4" x 22" (1175 mm x 559 mm)                  |
| Basin area, top:       | 52" x 24" (1321 mm x 610 mm)                      |
| Weight:                | 100 lbs (45.4 kg)                                 |
| Minimum floor load:    | 56 lbs/ft <sup>2</sup> (273.4 kg/m <sup>2</sup> ) |
| Water depth:           | 15-1/2" (394 mm)                                  |
| Water capacity:        | 68 gal (257.4 L)                                  |
| Minimum flat for door: | 2-3/4" (70 mm)                                    |

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific requirements of these regulations.