MOEN®

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Magnetix[™] technology features an innovative magnetic docking system
- Includes rainshower, handshower, hose and magnetic docking system
- 60" double interlock spiral hose (metal), for Chrome and Spot Resist Brushed Nickel finishes only
- 1/2" IPS connection

OPERATION

- · Rainshower is single function, Handshower is six functions
- Rotate outer ring to select function
- 3-way diverter provides ability to flow each shower head separately or combined for more coverage
- Pause/trickle button allows to momentarily pause the handshower flow at a push of a button

FLOW

Designed to deliver 2.5 gpm (9.5 L/min) MAX at 80 psi

STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1, and all applicable specifications referenced therein
- ADA compliant


WARRANTY

- Lifetime limited warranty against material or manufacturing defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations



Engage™ 6-Function Rainshower/ Handshower Combo with Magnetix™ Docking Hose

Models: 26009 series

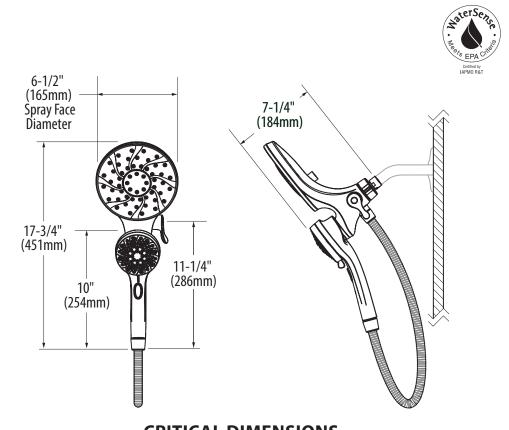

CRITICAL DIMENSIONS

(DO NOT SCALE)