

# MOEN®

## Specifications

### DESCRIPTION

- Component construction with various finishes identified by suffix
- Handshower with Magnetix™ docking
- 60" hose included
- Assembled with two check valves for backflow prevention
- Adjustable bracket

### OPERATION

- Six function handshower
- Wall bracket rotates to adjust angle of handshower

### FLOW

- Flow is limited to 1.75 gpm (6.7 L/min) max.


### STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- Meets WaterSense® criteria

### WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

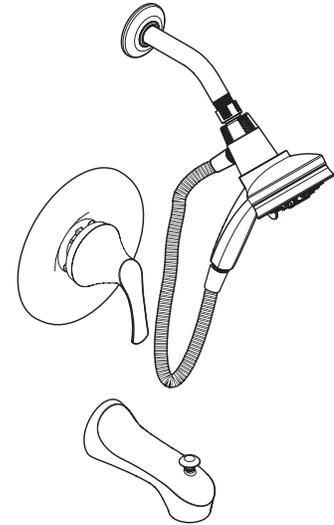

### Darcy™ Posi-Temp® Single Handle Tub/Shower with Magnetix™ Handheld Shower

Models: 82560 series

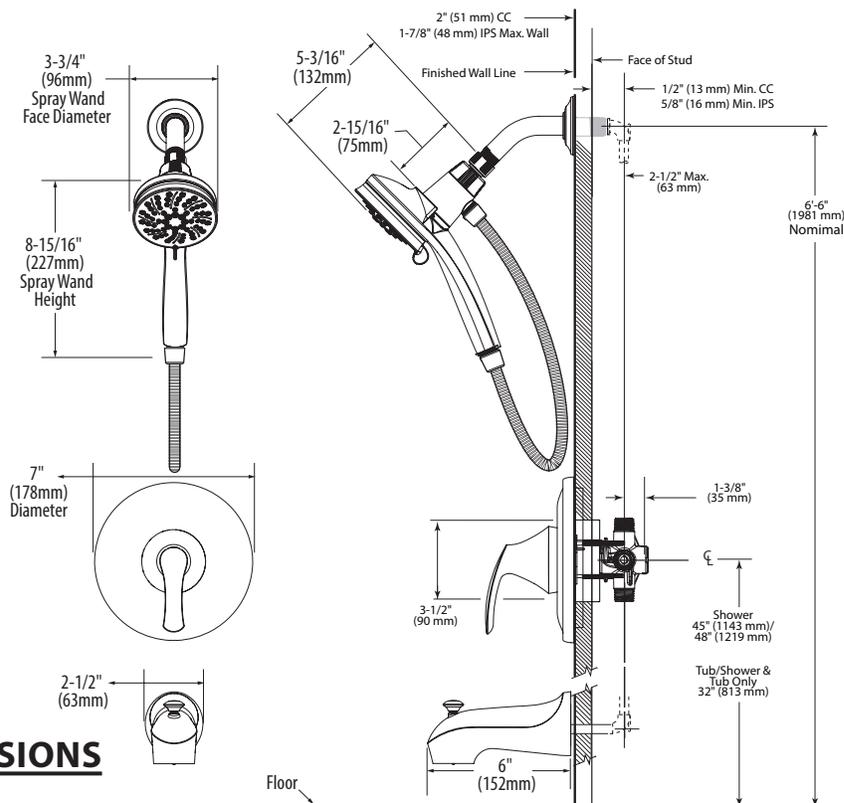

### CRITICAL DIMENSIONS

(DO NOT SCALE)