

AFWALL® MILLENNIUM™ FloWise® ELONGATED FLUSHOMETER TOILET with EVERCLEAN®

- Wall-mounted flushometer valve toilet
 - Vitreous china
 - High Efficiency, Low Consumption. Operates in the range of 0.9 gpf to 1.3 gpf (4.2 - 6.0 Lpf)
 - Meets definition of HET (High Efficiency Toilet) when used with a high efficiency flush valve (0.9 gpf - 1.3 gpf or 1.07/0.9 gpf dual flush)
 - Maximum Performance (MaP) score of 1,000 grams at 0.9 gpf - 1.3 gpf (4.2 - 6.0 Lpf)
 - Permanent EverClean® antimicrobial surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
 - Condensation channel
 - Concealed trapway design
 - Elongated bowl
 - Powerful direct-fed siphon jet action
 - 1-1/2" (38mm) inlet spud
 - Fully glazed 2-1/8" (54mm) trapway
 - 10" x 12" (254 x 305mm) water surface area
 - Static weight load of 1,000 lbs* (454 kg)
 - 100% factory flush tested
- (Flushometer valve & seat shown not included)

- 3351 101** Elongated bowl only, top spud
- 3352 101** Elongated bowl only, top spud with slotted rim for bedpan holding
- 3353 101** Elongated bowl only, back spud
- 3354 101** Elongated bowl only, back spud with slotted rim for bedpan holding

System MaP* Score:

- 1,000 grams of miso @ 0.9 gpf to 1.3 gpf (4.2/6.0 Lpf) when used with an American Standard flush valve

* Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Veritec Consulting, Inc. and Koeller and Company.

Component Parts:

- 047007-0070A** Inlet spud (furnished with bowl)

Nominal Dimensions:

660 x 356 x 381mm (26" x 14" x 15")

Fixture only, less seat and flushometer valve

Recommended working pressure-between 25 psi at valve when flushing and 80 psi static.

**Meets or Exceeds the Following Specifications:
Compliance Certifications -**

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA International B45.1

* This product is not recommended for bariatric use.

EVERCLEAN®
Surface




NOTE: Roughing-in information shown on reverse side of page


To Be Specified:

- Colour: White:
- Seat:
 - American Standard #5905100 Extra heavy duty open front less cover with stainless steel check hinge
 - #5905110 Same as above, with EverClean® surface
- Flushometer Valve for **Top Spud:**
 - 1.3 gpf (6.0 Lpf) American Standard:
 - Sensor-Operated Selectronic®: DC Power #6065161.002, AC Power #6067161.002
 - Manual: #6047161.002
 - 1.07 gpf (4.8 Lpf) American Standard:
 - Sensor-Operated Selectronic®: DC Power #6065121.002, AC Power #6067121.002
 - Manual: #6047121.002
 - 1.3 / 0.9 gpf (6.0/4.2 Lpf) Dual Flush American Standard:
 - Sensor-Operated Selectronic®: DC Power #6065761.002, AC Power #6067761.002
 - 1.07 / 0.9 gpf (4.8/4.2 Lpf) Dual Flush American Standard:
 - Sensor-Operated Selectronic®: DC Power #6065721.002, AC Power #6067721.002
- Selectronic® Concealed Flushometer Valve for **Back Spud:**
 - 1.3 gpf (6.0 Lpf) American Standard **Rear Access:** DC Power #6065262.007, AC Power #6067262.007
 - 1.3 gpf (6.0 Lpf) American Standard **Front Access:** DC Power #60652362.007, AC Power #6067362.007
 - 1.07 gpf (4.8 Lpf) American Standard **Rear Access:** DC Power #6065222.007, AC Power #6067222.007
 - 1.07 gpf (4.8 Lpf) American Standard **Front Access:** DC Power #60652322.007, AC Power #6067322.007

3351 101/3352 101

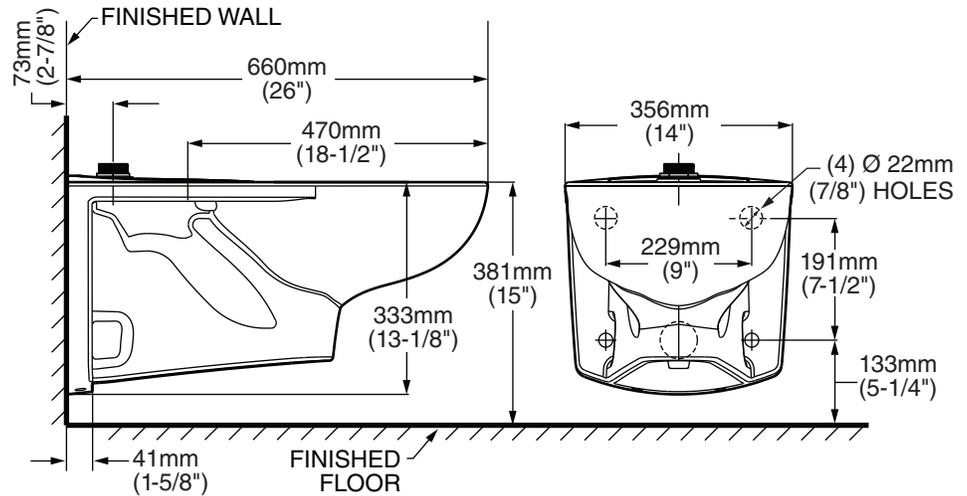

3353 101/3354 101

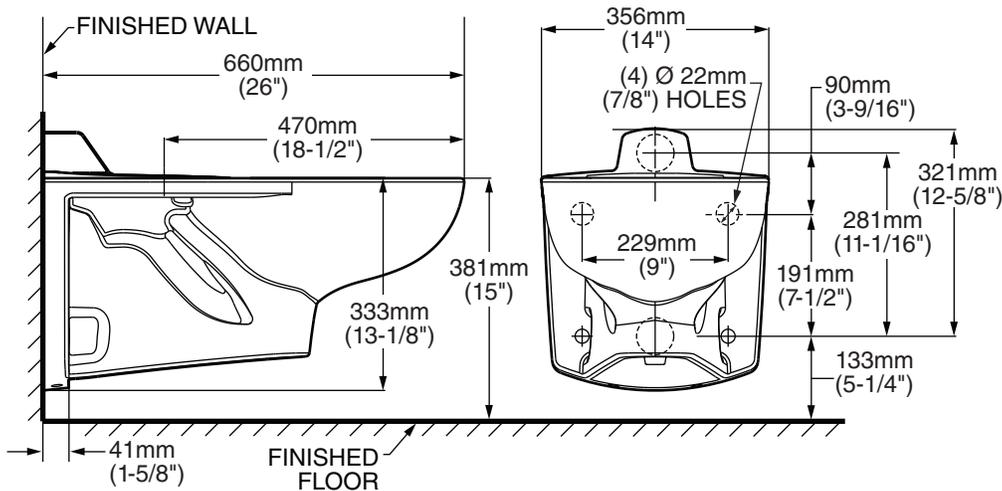

NOTES:

- Toilet designed to meet Barrier Free B651.12 accessibility standards with seat height set at 432 to 483mm (17" to 19") from finished floor.

PRODUCT 3351 101 SHOWN, 3352 101 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.

PRODUCT 3353 101 SHOWN, 3354 101 SAME AS EXCEPT WITH SLOTTED RIM FOR BED PAN HOLDING.

WASTE OUTLET SEAL RING MUST BE NEOPRENE OR GRAPHITE-FELT (WAX RING NOT RECOMMENDED).

SUGGESTED 2mm (1/16) CLEARANCE BETWEEN FACE OF WALL AND BACK OF BOWL.

TO COMPLY WITH AREA CODE GOVERNING THE HEIGHT OF VACUUM BREAKER ON THE FLUSHOMETER VALVE, THE PLUMBER MUST VERIFY DIMENSIONS SHOWN FOR SUPPLY ROUGHING.

FLUSHOMETER VALVE NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

CARRIER AS REQUIRED TO BE FURNISHED BY OTHERS.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORT.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.