

# Location:



# SYMMONS® Identity<sup>®</sup>



6701-TRM, 6701TRMTC

Shower Trim

Specification Submittal



## Feature Highlights

- Identity Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- 1 mode showerhead with easy to clean nozzles
- 2.0 gpm (7.6 L/min) flow restrictor
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 6701TRMTC)

## Options/Modifications

- 1.5**  1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L4** Less head, arm and flange
- L7** Less handle
- STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.

## Model Numbers

- 6701-TRM**  
Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately
- 6701TRMTC**  
Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

## Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



## Compliance


- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min)  
2.0 gpm (7.6 L/min)



## Architectural/ Engineering Specification

Symmons Identity \_\_\_\_\_ With Identity Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Metal lever handle, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less handle", "STN - Satin nickel finish".

## Dimensions

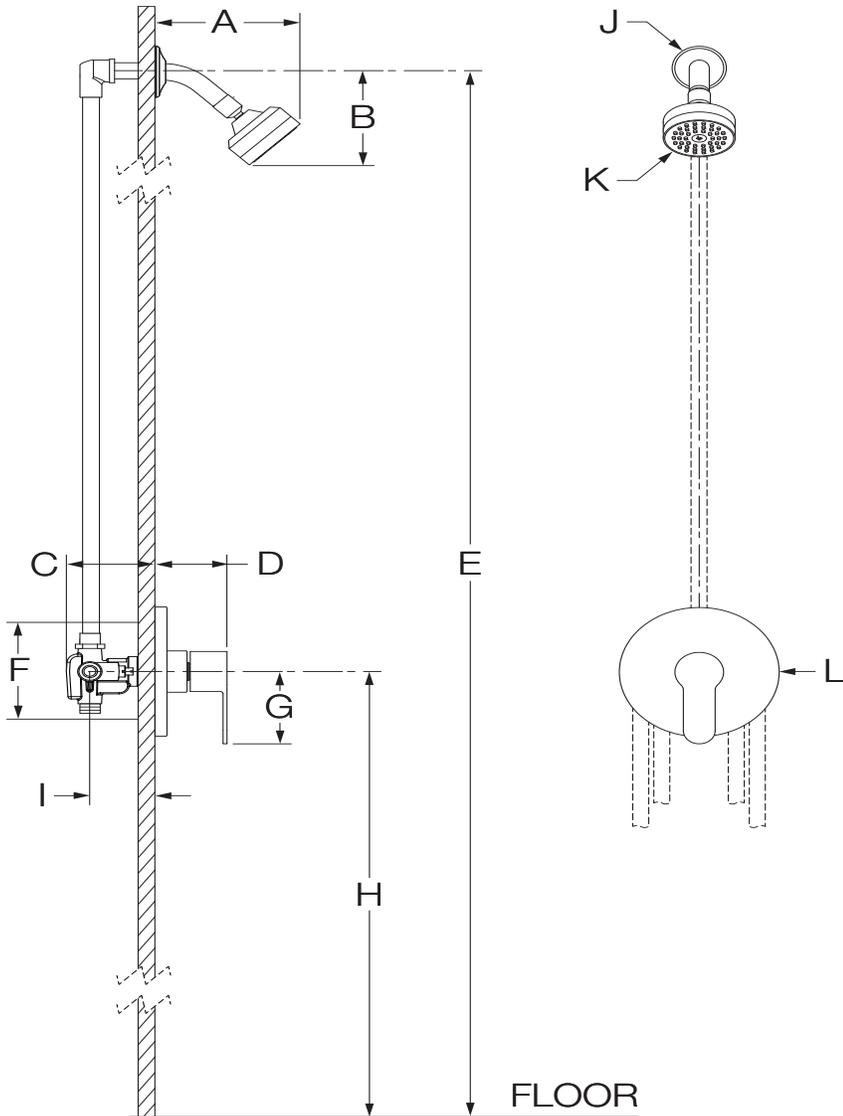

Measurements	
A	5-7/8", 149 mm
B	4-5/8", 117 mm
C	3-1/2", 89 mm
D	2-7/8", 73 mm
E	Ref. 77", 1956 mm
F	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
G	3-1/2", 89 mm
H	Ref. 42", 1067 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Ø 2-1/2", 64 mm
K	Ø 3-1/8", 79 mm
L	Ø 6-3/8", 162 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.