

### DESCRIPTION

- Various finishes identified by suffix
- Handshower
- 60" double interlock spiral hose (metal)
- Double check valve in handle
- Cradle for handshower

### OPERATION

- Five function: down pour; wide coverage; rinse; massage, and drench
- Cradle rotates to adjust angle of handshower

### FLOW


- Designed to deliver 2.5 gpm (9.5 L/min) at 80 psi

### STANDARDS

- Designed and manufactured to comply with the applicable requirements of ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein


### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

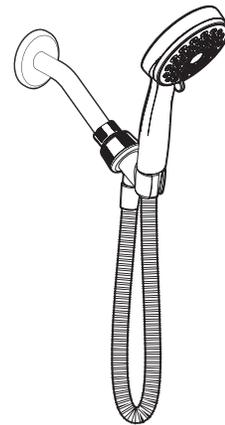

**Ignite™**  
**Five-Function Handshower**  
**with Bracket & Hose**

**Models:** 20091 series

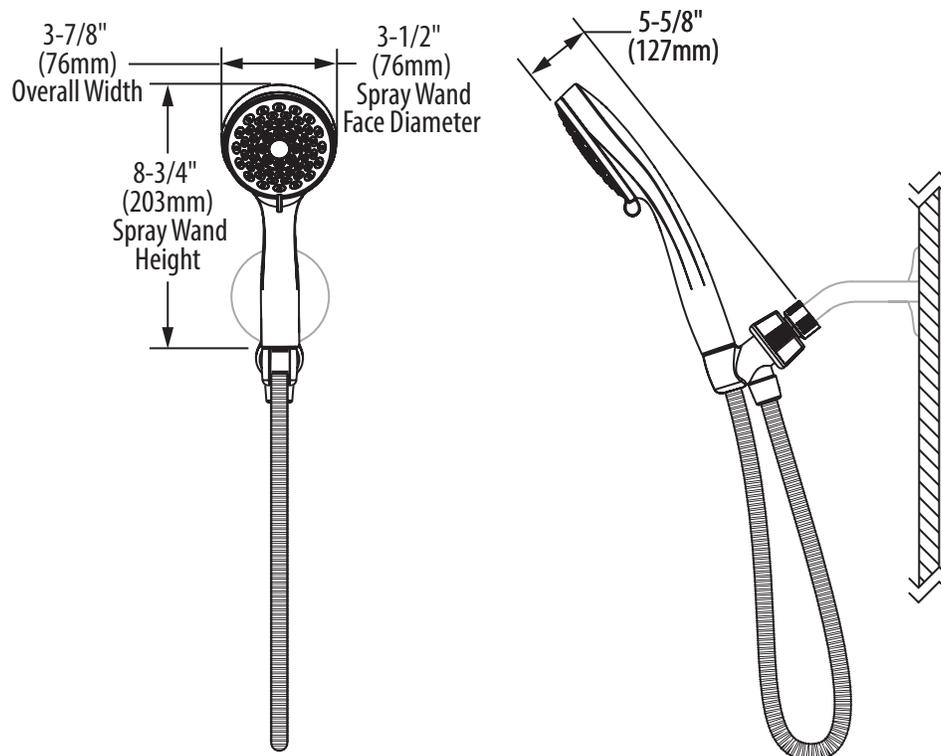

### CRITICAL DIMENSIONS

(DO NOT SCALE)