



Two-piece elongated toilet, dual-flush K-3989

Features

- Two-piece design
- Elongated bowl offers added room and comfort
- Comfort Height[™] feature offers chair-height seating that makes sitting down and standing up easier for most adults
- Left-hand nested trip lever offers a choice of 1.1 or 1.6 gallons per flush (gpf)
- 2-1/8" (54 mm) fully glazed trapway
- Combination consists of the K-4199 bowl and the K-4458 tank

Technology

 Dual-flush technology allows you to choose between a full or partial flush

Installation

- Seat sold separately
- Standard 12" (305 mm) rough-in
- Three-bolt guick-connect installation

Water Conservation & Rebates

Eligible for consumer rebates in some municipalities

Recommended Products/Accessories

K-5588 Purefresh™ Deodorizing elongated toilet seat K-4108 C³™-230 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

K-9237 Dual-flush Trip Lever

1023457 Wax Ring/Hardware Kit

1265114 Connector Hose

K-23726 Drain treatment

Included Components

K-4458 Toilet tank, dual-flush

K-4199 Elongated toilet bowl

K-9237 Dual-flush Trip Lever



ADA CSA B651

ОВС



Codes/Standards

ASME A112.19.2/CSA B45.1 EPA WaterSense™ ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black ^{TN}







Two-piece elongated toilet, dual-flush **K-3989**

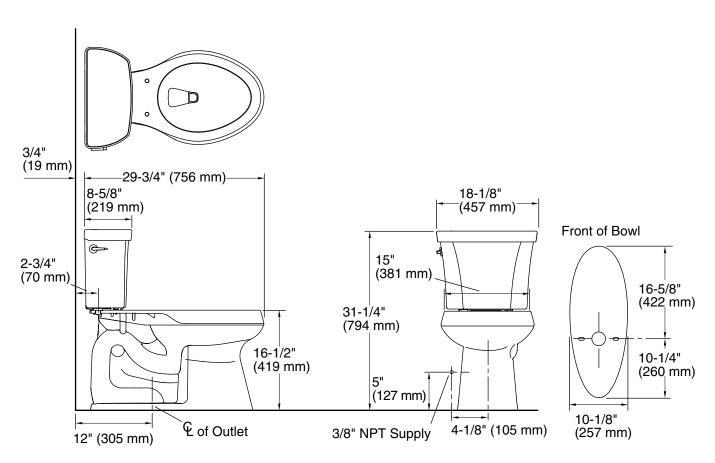

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated
Flush type: Class Five
Trap passageway: 2-1/8" (54 mm)

Water surface size: 11-3/8" x 8" (289 mm x 203 mm)

Rim to water 5-3/8" (137 mm)

surface:

Rough-in: 12" (305 mm) Seat-mounting 5-1/2" (140 mm)

holes:

Notes

Install this product according to the installation instructions.

The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

