# Liberty Pumps

# JMP JE

Water Powered Back-Up Pump

**Protects your** basement during a power outage or main pump failure!

> Requires no electricity

#### Features:

- Accepts 20PSI up to 100PSI inlet supply pressure\*\*
  - Fully automatic
  - High-output flow rates
    - Compact design
    - Fully-assembled
    - 1-1/2" Discharge
- Works off municipal water supply\*
  - 3/4 " NPT water inlet connection
- UPC approved (IAPMO PS 119-2005)
- SHARKBITE® inlet connection accepts pex, copper or CTS CPVC 3/4" line

Efficient design removes





innovate. evolve.

# S. 104 Standard Alarm Model



Having an alarm on your water powered backup pump is important.

In the event of a main pump failure – you want to know your backup pump has taken over and is operating.



Features:

- Compact, pre-mounted float sensor
- 120V wall mount alarm unit (Model ALM-P1)
- 86 dB audio alarm
- Super-bright LED alarm ring
- 9-volt battery backup
- Auxiliary contacts for connection to other home security systems
- Quick connectors for easy wiring
- Silence and Test buttons for alarm
- Low Battery LED
- Power On LED

Patent Pending



#### **NEW!**

Super bright LED alarm ring



SJ10A-EYE

## Wireless Enabled SumpJet

The SumpJet with NightEye<sup>™</sup> wireless technology provides the ultimate in basement protection. Whether at home or anywhere in the world, receive notification on your smart device when your backup pump has activated.

#### Features:

- Free NightEye™ app
- Apple<sup>®</sup> iOS and Android<sup>®</sup> compatible
- No service or subscription fees (message and data rates may apply)
- Immediate notification of your SumpJet activating
- High water level notification
- Low basement temperature warning - user defined setting
- Easy setup, connects with simple BlinkUp™ technology
- NEW super bright red LED alarm ring
- 86 dB audible alarm
- 9-volt battery backup
- Silence and test alarm remotely through the NightEye™ app.
- Auxiliary contacts for connection to other home security systems

**NOTE:** During power outages, your home's wireless router will not be operational and unable to send signals to your mobile device unless on a backup power source. The alarm device mounted in the basement will still activate running on 9-volt battery.

pple® iOS & Android® compatible





Patent Pending





Liberty Pumps



# Sump Jet Water Powered Back-Up Sump Pump

#### **Performance Chart:**

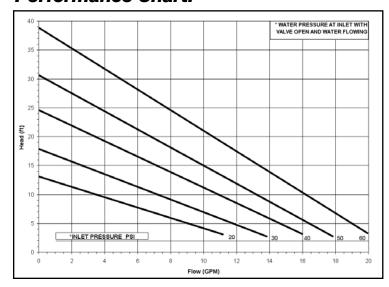



Water pressure valve at inlet with valve open and water flowing			Sump Water Removal At Various Heads (Static Head in 1-1/2" Pipe or Larger)											
Lift		4 ft.		1.21 m	8 ft.		2.4 M	12 ft.		3.6 M	15 ft.		4.5 M	
PSI	KPA	GPM	GPH	M 3/hr	GPM	GPH	M 3/hr	GPM	GPH	M 3/hr	GPM	GPH	M 3/hr	
20	138	11.0	660	2.5	5.8	348	1.3	-	-	-	-	-	-	
30	207	12.8	765	2.9	9	540	2.0	5.5	330	1.2	-	-	-	
40	276	15.4	924	3.5	12.5	750	2.8	9.3	558	2.1	7.2	432	1.6	
50	345	17.2	1032	3.9	14.5	870	3.3	12	720	2.7	10	600	2.3	
60	414	19.8	1185	4.5	17	1020	3.9	15.2	912	3.5	13.5	810	3.1	

#### Features:

Adjustable stainless hose clamp for easy mounting

Removes 2 gallons of water for each 1 gallon used. (based on 5' lift)

Fully assembled, compact design
Built-in screen with removable foot valve
Constructed of durable PVC

#### **Dimensions**

Major Height: 21.6", Major Width: 5.1", Weight: 3.5 lbs. (standard model)

#### **Construction: PVC**

Maximum Fluid Temperature 130 Degrees F.

### Inlet Connection: 3/4" SHARKBITE® fitting


Discharge Size: 1-1/2"

#### Built-in check valve at water inlet

Additional backflow protection is required. Check with local plumbing codes prior to installation.

Important: Minimum recommended pit diameter is 18". The SJ10 works in conjunction with your main sump pump. Make sure you have adequate pit size to properly install the SJ10 without float interference.

#### Typical Installation Diagram:



### Models

Weight: 3.5 lbs. Standard water-powered backup pump (no alarm)

#### SJ10A

Weight: 8 lbs. Water-powered pump with alarm

#### SJ10A-EYE

Weight: 8 lbs.
Water-powered
pump with NightEye<sup>™</sup>
wireless enabled alarm

<sup>\*</sup> The SJ10 requires an uninterrupted water source to operate. If you have a well pump, the SJ10 will not operate during power outages.

<sup>\*\*</sup>SJ10 pumping performance varies with inlet water source pressure and pumping head. See complete specifications and performance chart for expected flow rates.

SHARKBITE® is a registered trademark of the CASH ACME Co.