American Standard

Style That Works Better




2175 562 Shown.

COLONY SOFT

SINGLE CONTROL CENTRESET SINK FAUCET

MODEL NUMBER:

- 2175 565 Centreset Sink Faucet Metal Lever Handle. Less drain. With pop-up hole, plug button and rod. Flexible hose supply connections.
- □ 2175 562 Centreset Sink Faucet Metal Lever Handle. Metal Speed Connect[™] Pop-up drain. Flexible hose supply connections.
- □ 2175 563 Centreset Sink Faucet Metal Lever Handle. Non-Metallic Speed Connect[™] Pop-up drain. Flexible hose supply connections.

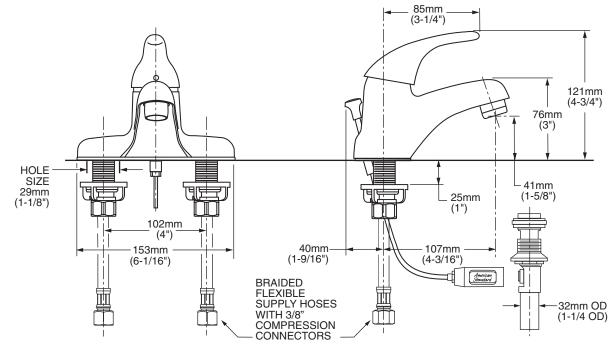

GENERAL DESCRIPTION:

Single control centreset sink faucet on 4" (102 mm) centres. Washerless 40mm ceramic disc valve cartridge. Cast brass waterway with 1/2" (13 mm) male threaded inlet shanks and 3/8" compression flexible hose supply connections. Metal body and colour matched underbody. Metal lever handle with large "comfort zone". 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect™ drain body with 1-1/4 inch (32mm) tail piece, (2175562). Non-Metallic Speed Connect™ drain body with 1-1/4 inch (32mm) tail piece, (2175563). 1.25 gpm (1.5gpm US)/5.7L/min. maximum flow rate at 60 p.s.i. (410kPa).

PRODUCT FEATURES:

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61/Section 9.

Speed Connect[™] Drain:

- Fewer parts. Installs in less time.
 - No adjustments required seals the first time, every time.
 - Flexible stainless steel cable installs effortlessly in tight spaces.

Longer Spout: Provides extended reach into sink.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

American Standard

Style That Works Better


COLONY SOFT

SINGLE CONTROL CENTRESET SINK FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1M NSF 61/Section 9 CSA B 125 IAPMO (cUPC)

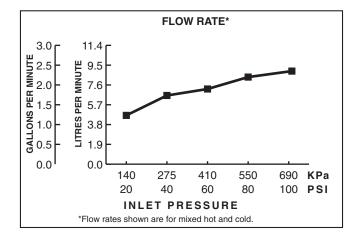

			Finish Option
	Product		Polished Chrome
	Number	Description	002
Ł	2175 565	Sink faucet. Less drain. Metal Lever handles. Flexible hose supply connections.	
Ł	2175 562	Sink faucet. Metal Speed Connect™ Pop-up drain. Flexible hose supply connections.	
£	2175 563	Sink faucet. Non-Metallic Speed Connect™ Pop-up drain. Flexible hose supply connections.	

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.