
American Standard

Style That Works Better

VENETIAN TWO-HANDLE WIDESPREAD SINK FAUCET

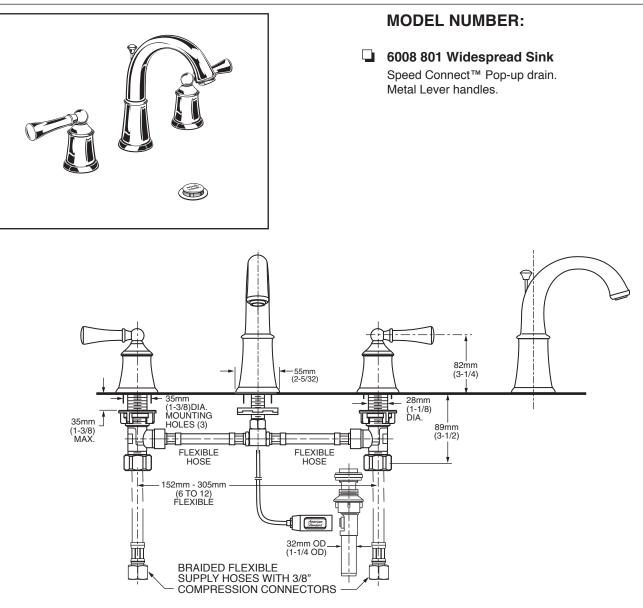

GENERAL DESCRIPTION:

Cast brass valve bodies with flexible hose connections for 6" to 12" (152 to 305mm) installations. 1/4 turn washerless ceramic disk valve cartridges. Metal spout with metal colour-matched underbody. One-half inch male inlet shanks with brass coupling nuts. 20 inch (508mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Non-Metallic Speed Connect[™] drain body with 1-1/4 inch (32mm) tailpiece. 1.25 gpm/5.7L/min. maximum flow rate at 60 p.s.i. (414kPa).

PRODUCT FEATURES:

Cast Brass Valve Bodies: Durable. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Low Lead: Meets NSF Standard 61 requirements.

Exclusive Speed Connect Drain:

- 1/3 the Parts installs in 1/3 the time.
- No tools or plumbers putty required for installation.
- No adjustments required seals the first time, every time.
- · Flexible stainless steel cable installs effortlessly in tight spaces.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

Choice of Finishes: Available in Polished Chrome, and Satin (PVD).

American Standard


Style That Works Better

VENETIAN TWO-HANDLE WIDESPREAD SINK FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1M NSF 61 IAPMO (cUPC)



		Finish Options	
Product		Polished Chrome	PVD Satin
Number	Description	002	295
6008 801	Two-Handle Sink faucet. Speed Connect™ Pop-up drain. Metal Lever Handles.		