



65350LF▲


Submitted Model No.: _____

Specific Features: _____

BRIZO®

WIDESPREAD LAVATORY FAUCET

- Sotria™ Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers

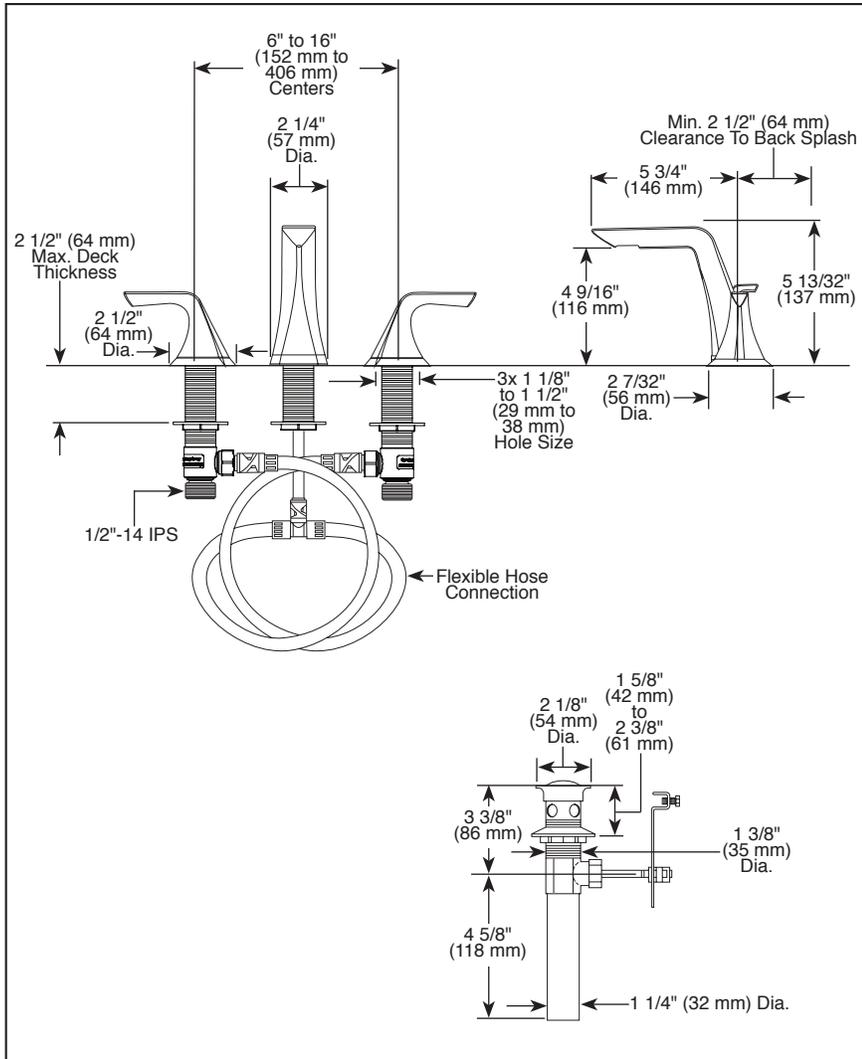

▲ Designate Proper Finish Suffix

STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread - 6" (152mm) to 16" (406 mm) centers.
- 5 3/4" (146 mm) long, 5 13/32 (137 mm) high rigid spout.
- 1/4 turn handle stops.
- Control mechanism is a rotating cylinder ceramic cartridge with 90° rotation.
- Metal drain with pop-up type fitting with plated flange and stopper.
- Flexible hose connections.
- Accommodates up to 2 1/2" deck thickness.
- Max. 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Ceramic disc valving.
- Handles feature neodymium rare earth magnets to simplify installation and provide secure flush mount installation.
- Spout features water-efficient, laminar flow.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.