


Submitted Model No.:\_\_\_\_\_\_\_Specific Features:



▲ Designate Proper Finish Suffix



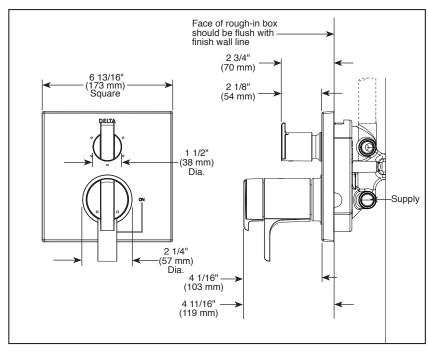

see what Delta can do

# INTEGRATED SHOWER DIVERTER TRIM

- Traditional Valve Trim with Three Function Diverter (T27T867)
- Traditional Valve Trim with Six Function Diverter (T27T967)
- Three Lever Handles

## **FEATURES:**

- TempAssure® 17T Thermostatic bath mixing valve trim
- Three or six function diverter

### **STANDARD SPECIFICATIONS:**

- Main control utilizes Thermostatic Valve cartridge
- Thermostatic wax element maintains the outlet temperature to ±3.6°F
- For use with MultiChoice® Universal integrated shower diverter rough valve body (R22000 Series)
- Top handle controls diverter functions
- Bottom handles (2) control on/off and temperature
- Field adjustable to limit bottom handle rotation into hot water zone
- Bottom handle 90° Maximum rotation
- Red/blue indicator markings
- Three function diverter for 2 individual positions, 1 shared position
- For two individual functions, no shared functions, order additional RP71717
- Six function diverter for 3 individual positions, 3 shared positions
- For three individual functions, no shared functions, order additional RP71718
- 1/2" rough-in
- Cartridges included
- Standard installation allows up to 1-1/8" finished wall thickness
- Thick wall installation kit RP90544 can be ordered to allow for up to 2-1/8" finished wall thickness

### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

ASME A112.18.1 / CSA B125.1
Indicates compliance to
ICC/ANSI A117.1 - Valve control only

#### Maximum Flow Rate Guide

Maximum Flow Face Caldo					
Rough	Cartridge	Outlet	40 psi	60 psi	80 psi
R22000	17T	Shower	5.9 gpm	7.2 gpm	8.3 gpm
R22000-WS	17T	Shower	5.3 gpm	6.5 gpm	7.4 gpm

Based on 6 Setting Diverter

**Delta Faucet Company** 

55 E. I I I th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2018 Delta Faucet Company