


Submitted Model No.:

Specific Features:

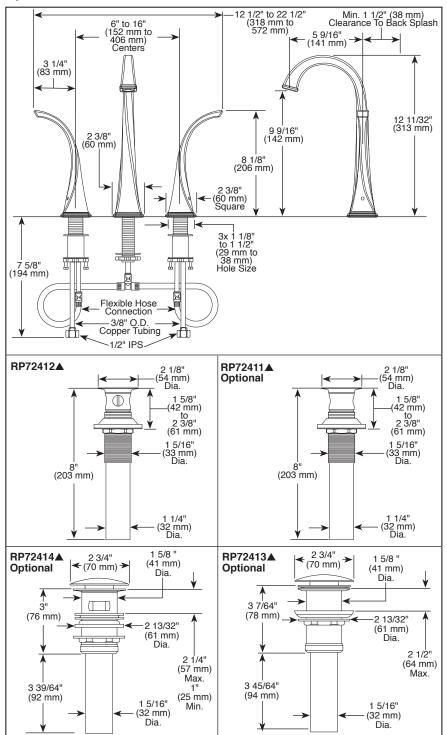

▲ Designate Proper Finish Suffix

Brizo Kitchen & Bath Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability. BSP-L-65430LF Rev. E

BRIZC WIDESPREAD VESSEL LAVATORY FAUCETS

- Virage[®] Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6" to 16" Centers

STANDARD SPECIFICATIONS:

- Two handle lavatory faucet for concealed mounting on 3 hole applications.
- Widespread 6" (152mm) to 16" (406 mm) centers.
- 5 9/16" (141 mm) long, 12 11/32 (313 mm) high rigid spout.
- Control mechanism shall be of the rotating ceramic cylinder type with 90° (1/4 turn) rotation.
- Metal grid strainer with overflow included.
- Optional grid strainer without overflow (RP72411), push button pop-up with overflow (RP72414) or push button pop-up without overflow (RP72413).
- Accomodates up to 3" deck thickness.
- Max. 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense[®]
- Verified compliant with .25% weighted average Pb content regulations.

Brizo Kitchen & Bath Company Indianapolis, Indiana 46280 A Division of Masco Corporation of Indiana © 2015 Brizo Kitchen & Bath Company