



**Submitted Model No.:** 

**Specific Features:** 

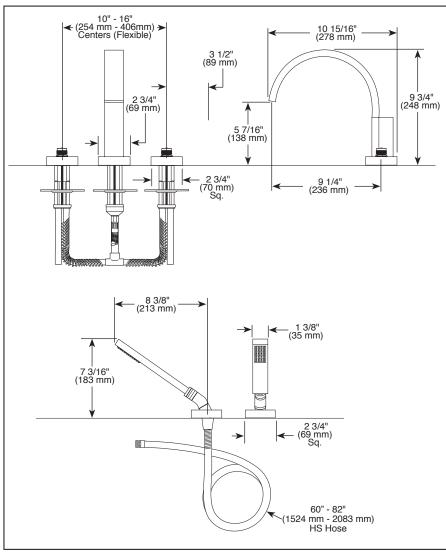

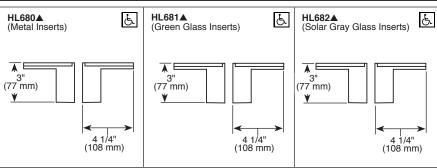

▲ Designate proper finish suffix

# BRIZO

# ROMAN TUB/WHIRLPOOL **FAUCET TRIM**

- Siderna® Bath Collection
- Three Hole Installation (T67380)
- Four Hole Installation (T67480)
- Rough-In Kit Must Also be Ordered to Complete Installation (R64707 for four hole and R62707 for three hole)

### STANDARD SPECIFICATIONS:


- Trim Only for two handle Roman Tub faucet for concealed mounting
- 10 15/16" (278 mm) long, 9 3/4" (248 mm) high slip-on rigid spout.
- Temperature and volume controlled with handles.
- Rough-In kit must also be ordered to complete installation (R64707 for four hole and R62707 for three hole). There are separate specification sheets on each rough-in kit if more details are required.
- Handshower includes double check valves for backflow prevention (T67480 & T67481).
- Handshower flows 2.0 gpm @ 80 psi.
- Minimum 5" (127 mm) to maximum 8" (203 mm) distance between holes.
- Accomodates up to 2 1/2" deck thickness.
- Handles sold separately.
- 60" 82" (1524 mm 2083 mm) stretchable finished metal hose.

#### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

 ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1- Valve control only.



## **Delta Faucet Company**

Indianapolis, IN 46280 A Division of Masco Corporation of Indiana © 2014 Masco Corporation of Indiana