の MOEN

Buy it for looks. Buy it for life.®

DESCRIPTION

- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing
- Reflex[®] system offers smooth operation, easy movement, self retraction, and secure docking
- Power Clean[™] spray technology Metal construction with various finishes identified by suffix
- Duralock[™] quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings connect directly to supply stop OPERATION

Lever style handle

- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Standard flow is limited to 1.5 gpm (5.7 L/min) at 60 psi
- CARTRIDGE
- 1255[™] Duralast[™] cartridge for Single-Handle Faucets Engineered polymers, non-ferrous and stainless steel materials

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- Water Act
- ADA 🔄 for lever handle .
- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow WARRANTY
- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations



Irvine™ Single-Handle Spring **Pulldown Kitchen Faucet**

Model: 87355 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1, 2, 3 AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

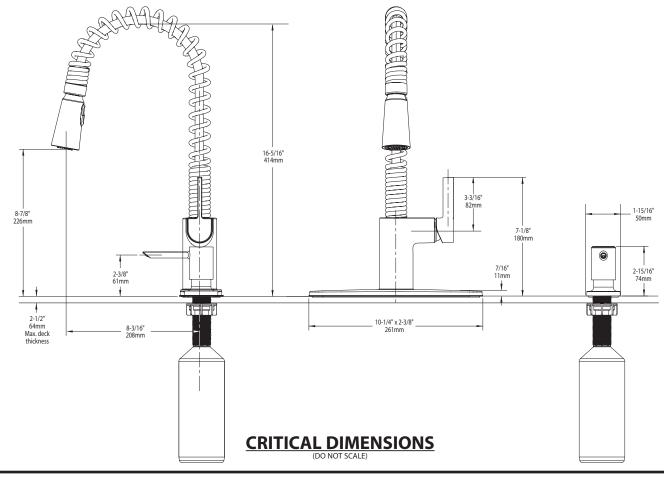

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com