

**GENERAL DESCRIPTION:**

Cast brass body. All metal handle. Washerless 28 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500 mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Brass push pop-up drain. body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate. Fitting can be mounted on 4" centers using optional escutcheon (7353.101P) or single hole mounting method.

**PRODUCT FEATURES:**

- Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.
- Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.
- Exclusive Brass Push Pop-up Drain:**
  - Brass push pop-up drain.
  - Fewer parts. Installs in less time.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.


**SUGGESTED SPECIFICATION**

Single control lavatory faucet shall feature a cast brass body with metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall feature a brass push pop-up drain. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7353101. . . . .

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9**
- NSF 372**
- ANSI A117.1**

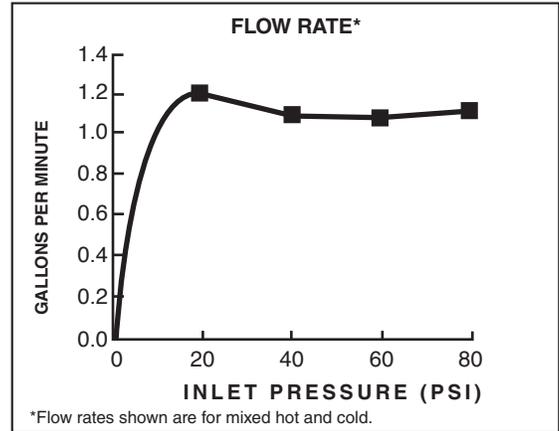

Product Number	Description	Finish Options				
		Polished Chrome	Polished Nickel	Legacy Bronze	Brushed Nickel	Matte Black
		002	013	278	295	243
7353101	Townsend Single Control Monoblock. Brass push pop-up drain.  					

Showerhead Accessories	
Product Number	Description
7353101P	Optional Escutcheon Plate Only (For mounting on 4" centers) 

 Meets CSA B651 Barrier Free code. Check local codes.

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.