American Standard

TIMES SQUARE™
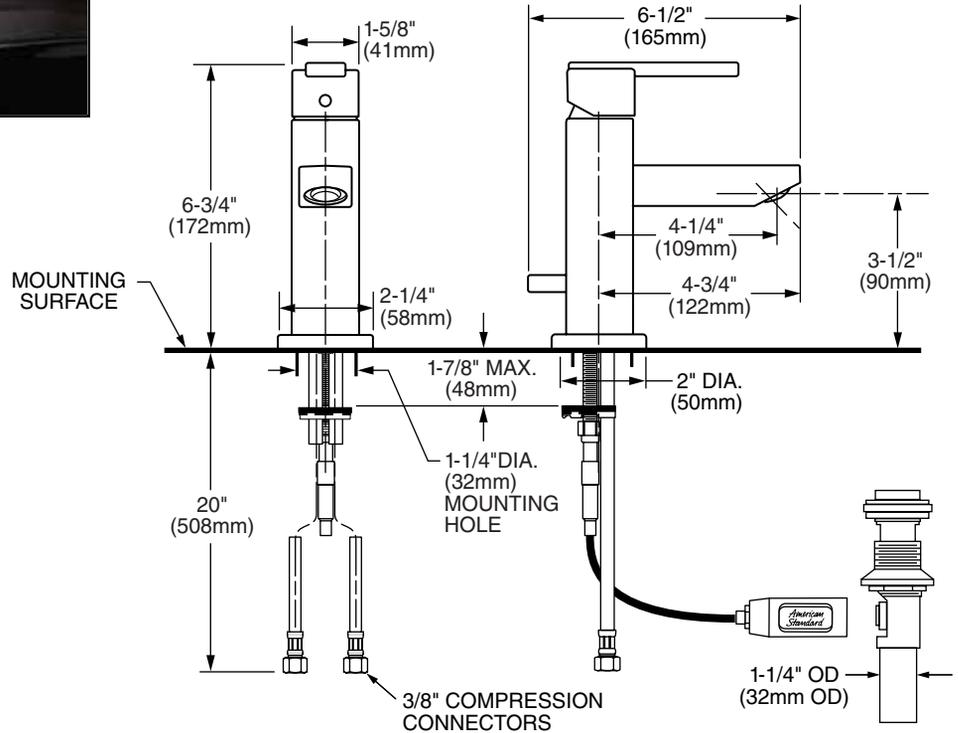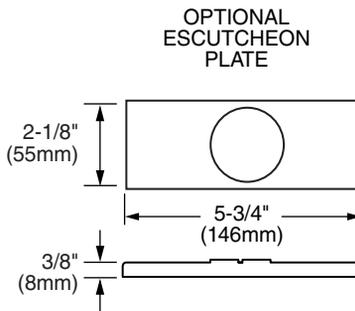## SINGLE CONTROL BATHROOM SINK FAUCET

*WaterSense® approval pending

MODEL NUMBER:

❏ **7184 101 Times Square™**
Single Control Monoblock
Lever handle. Metal Speed Connect® pop-up drain.

❏ **AVAILABLE ACCESSORY:**
7184 101P Escutcheon Plate Only

OPTIONAL ESCUTCHEON PLATE

2-1/8"
(55mm)

5-3/4"
(146mm)

3/8"
(8mm)

1-5/8"
(41mm)

6-1/2"
(165mm)

6-3/4"
(172mm)

MOUNTING SURFACE

2-1/4"
(58mm)

4-1/4"
(109mm)

4-3/4"
(122mm)

3-1/2"
(90mm)

1-7/8" MAX.
(48mm)

2" DIA.
(50mm)

1-1/4"DIA.
(32mm)
MOUNTING HOLE

20"
(508mm)

3/8" COMPRESSION CONNECTORS

1-1/4" OD
(32mm OD)

GENERAL DESCRIPTION:

All metal body. All metal handle. Washerless 35mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 20" (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32mm) tail piece. 1.25 gpm/5.7L/min. maximum flow rate. Faucet can be mounted on 4" (102mm) centers using optional escutcheon (7184101P) or single hole mounting method.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Exclusive Speed Connect Metal Drain:
• Fewer parts. Installs in less time.
• No adjustments required - seals the first time, every time.
• Flexible stainless steel cable - installs effortlessly in tight spaces.

Choice of Finishes: Available in Polished Chrome or Satin Nickel (PVD).
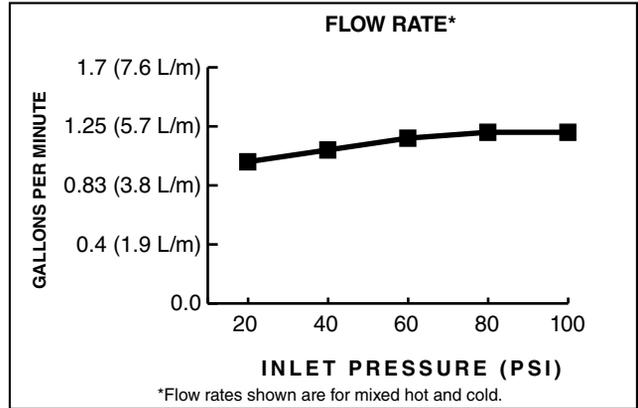
SUGGESTED SPECIFICATION:
Single control bathroom faucet shall feature an all metal body with metal lever handle. Faucet shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Faucet shall be American Standard Model # 7184101._ _ _.

10/13

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
NSF 61/Section 9 and Annex G
CSA B 125
IAPMO (cUPC)

FLOW RATE*

GALLONS PER MINUTE

1.7 (7.6 L/m)
1.25 (5.7 L/m)
0.83 (3.8 L/m)
0.4 (1.9 L/m)
0.0

20 40 60 80 100

INLET PRESSURE (PSI)

*Flow rates shown are for mixed hot and cold.

		Finish Options	
Product Number	**Description**	Polished Chrome	PVD Satin Nickel
		002	295
7184 101	Times Square™ Single Control Monoblock. Metal Speed Connect® pop-up drain.		
7184 101P	Optional Escutcheon Plate Only (For Mounting on 4" (102mm) Centers)		

♿ BARRIER FREE B651-12