
Pre-installation data sheet for baths and whirltubs

Index

Index	2
Important planning tips for bathtubs	3
Important planning tips for whirltubs	4
Maintenance openings	6
Data sheets for baths and whirltubs	11

Important planning tips for bathtubs

Installation location

- Check width of doors. Make sure that there will be no problems bringing the tub into the bathroom.
- There must not be any underfloor heating under the tub.
- The floor must be absolutely flat and horizontal.
- Install tubs **after** the tiles. (Top edge of finished floor)
- **Tolerances for acrylic:** As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.

Maintenance openings and air supply

Tiling the tub

- The following maintenance openings must be provided:
 - Drain and overflow fittings 200 x 200 mm
 - Control for coloured LED light/sound (optional) 200 x 200 mm maintenance opening at the foot end.
- Bathtub with coloured LED light: provide an opening in the panel for the air supply with an area of approximately 15 cm² (e.g. 3 x 5 cm or 2 x 7.5 cm).

Tub with removable panelling from Duravit

- It must be possible to remove the panelling for maintenance purposes. Your plans should therefore include clearance in front of the panelling.
- Provide for a gap of min. 2 mm between the floor and around the bathtub for the necessary air supply. This gap must remain unobstructed.

Tub with integrated/ seamless panel

- It must be possible to remove the tub for maintenance purposes. Your plans should therefore include clearance in front of the tub.
- Provide for a gap of min. 2 mm between the floor and around the bathtub for the necessary air supply. This gap must remain unobstructed.

Water installation

All work associated with the water connection may only be undertaken by a licensed plumber. The installation must be in accordance with country-specific standards and local regulations.

NOTICE

If the tray has a base inlet, a pipe interrupt must always be installed on-site. (DIN EN 1717)

> See installation diagram. (Page 4)

Water connection

- Connections for the water supply and drains must be in compliance with the currently valid standards and local regulations.
- Set coupling bush flush to mounting surface.

Electrical installation, bathtubs for coloured LED light/sound/white LED light under the edge of the tub



All work associated with the electrical connection may only be undertaken by a licensed electrician. The installation must comply with country-specific standards, local regulations and low-voltage guidelines.

Electrical data

Power supply

- Sound:
#791851 00 0 00 0000: 220-240V AC, 50/60Hz, 80W
- Coloured LED light with remote control for bathtubs
#790840 00 0 XX00: 110-240V AC, 50/60Hz, 30W
- Coloured LED light with remote control for Blue Moon bathtub
#790846 00 0 XX00: 110-240V AC, 50/60Hz, 60W
- White LED light under the edge of the tub
#791847 00 0 0000,
#791848 00 0 0000,
#791849 00 0 0000: 220-240V AC, 50/60Hz, 50W

Circuit breaker

I_N = 16 A


RCCB

I_{ΔN} ≤ 30 mA

Pre-installation

- > Lay a fixed feed cable for power supply:
 - install separate circuit breaker and residual-current circuit breaker (RCCB) upstream
 - connect all pole disconnector mains switch upstream located outside specified protection zones (0 - 2)
 - leave 3000 mm of feed cable exposed
- > Lay equipotential bonding cables:
 - leave 3000 mm of cable exposed

Protection zones

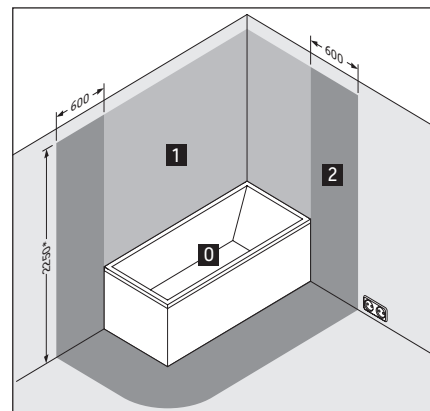

* or the height of the highest fixed-location shower head/water outlet, whichever is higher

Important planning tips for whirltubs

Transport

- > Wear suitable protective clothing.
 - > Keep the tub only at the marked points. Not at the whirlsystem.
 - > Avoid collisions.
- Improper transport could cause leaks.

Installation location

- Check width of doors. Make sure that there will be no problems bringing the tub into the bathroom.
- There must not be any underfloor heating under the tub.
- The floor must be absolutely flat and horizontal.
- Install tubs **after** the tiles. (Top edge of finished floor)
- Depending on the combination of tub and whirltub system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a supporting frame.
- **Tolerances for bathtubs:** As a result of the manufacturing process, deviations from the nominal dimensions may occur within the limits specified in the DIN 198 standard. Please take this into account in your planning.

Maintenance openings and air supply

NOTICE

Due to the improved revision possibility installation is recommended with a removable panel.

Tiling the tub

- The following maintenance openings must be provided:
 - Drain and overflow fittings 200 x 200 mm
 - Equipment 500 x 500 mm (Nahho: 250 x 400 mm)
 - For locations, please see the section on "Maintenance openings".
- Provide an opening in the panel for the air supply with an effective area of approximately 15 cm² (e.g. 3 x 5 cm or 2 x 7.5 cm).

Tub with removable panelling from Duravit

- It must be possible to remove the panelling for maintenance purposes. Your plans should therefore include clearance in front of the panelling.
- For the air supply is an opening pre-installed in the panel or is to provide a gap of min. 2 mm between the floor and around the bathtub. This opening must remain unobstructed.

Tub with integrated/ seamless panel

- It must be possible to remove the tub for maintenance purposes. Your plans should therefore include clearance in front of the tub.
- For the air supply is an opening pre-installed in the panel or is to provide a gap of min. 2 mm between the floor and around the bathtub. This opening must remain unobstructed.


Water installation

All work associated with the water connection may only be undertaken by a licensed plumber. The installation must be in accordance with country-specific standards and local regulations.

NOTICE

If the tray has a base inlet, a pipe interrupt must always be installed on-site. (DIN EN 1717)

> See installation diagram.

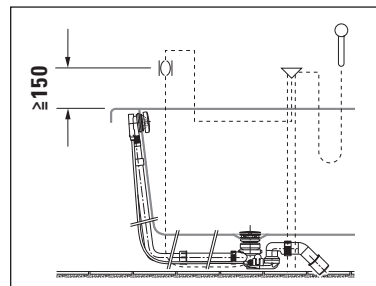

Water connection

- Connections for the water supply and drains must be in compliance with the currently valid standards and local regulations.
- Set coupling bush flush to mounting surface.

Electrical installation for whirltubs



All work associated with the electrical connection may only be undertaken by a licensed electrician. The installation must comply with country-specific standards, local regulations and low-voltage guidelines.

Electrical data

Whirl system	Rated power with standard equipment	Max. rated power, fully-equipped
Air-System (# 760XXX XX X AS 10XX)	0.76 kW	0.85 kW
Air-System Cape Cod (# 760XXX XX X AS 10XX)	0,70 kW	0,74 kW
Jet Project (# 760XXX XX X JP 10XX)	0,66 kW	0,66 kW
Jet-System (# 760XXX XX X JS 10XX)	0.59 kW	0.67 kW
Combi-System P (# 760XXX XX X CP 10XX)	1.89 kW	1.98 kW
Combi-System E (# 760XXX XX X CE 10XX)	1.91 kW	2.96 kW
Combi-System L (# 760XXX XX X CL 10XX)	1,59 kW	2,64 kW
Jet-System E (# 760XXX XX X JE 10XX)	1.14 kW	2.20 kW
Durapearl-System (# 760XXX XX X DP 10XX)	1.22 kW	1.26 kW

Power supply

76XXXX XX X XX 1XX0: 220-240V AC, 50Hz

76XXXX XX X XX 1XX6: 220-240V AC, 60Hz


Circuit breaker $I_N = 16 \text{ A}$

RCCB $I_{\Delta N} \leq 30 \text{ mA}$

Pre-installation

- > Lay a fixed feed cable for power supply:
 - install separate circuit breaker and residual-current circuit breaker (RCCB) upstream
 - connect all pole disconnector mains switch upstream located outside specified protection zones (0 - 2)
 - leave 3000 mm of feed cable exposed
- > Lay equipotential bonding cables:
 - leave 3000 mm of cable exposed

Protection zones

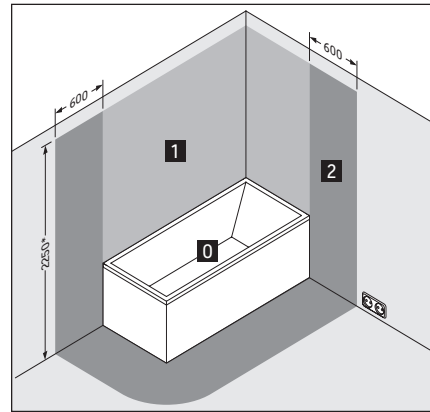

* or the height of the highest fixed-location shower head/water outlet, whichever is higher

Maintenance openings


Revisability

The whirltub should be installed that way, that all important components (pump, blower and control panel) are still accessible. When an whirltub is equipped with a panel, this should be accessible and removable.

Locations of the whirltub system components


The illustrations show the standard configuration for the components of the whirl system* with the location of the operating unit. The back massage is located at the head end (depending on the whirl system). Custom-made designs available on request. In such cases we will require a drawing showing the desired layout. Duravit will confirm whether the desired layout can be implemented.

2x3




760023, # 760024


2nd floor




760074, # 760075



760076, # 760160, # 760161




760079, # 760080




760081, # 760162, # 760163

Blue Moon




760143




760402


Cape Cod




760330



760362




760363




760364


Darling New




760238, # 760240, # 760242




760239, # 760241, # 760243




760244, # 760245



760246




760247




760248

* Please note that depending on the combination of tub and whirltub system it is possible that system components may protrude beyond the edge of the tub. We therefore recommend installation in a supporting frame / Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...

Daro




760027, # 760141




760028


D-Code




760095, # 760096,
760098, # 760100




760097, # 760099



760101

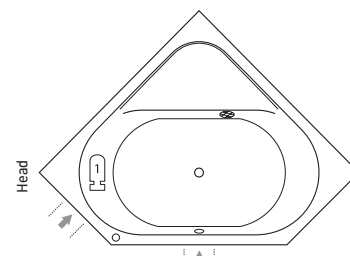


760137




760138


DuraStyle



760292, # 760294, # 760296




760293, # 760295, # 760297




760298, # 760299


Happy D.2




760308, # 760310, # 760312




760309, # 760311, # 760313




760314, # 760315




760316




760317



760318




760319




760320


Nahho

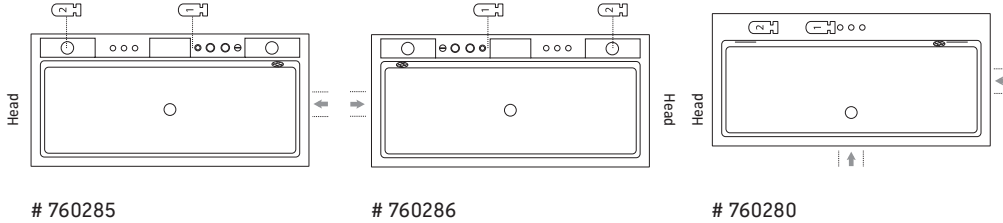

P3 Comforts

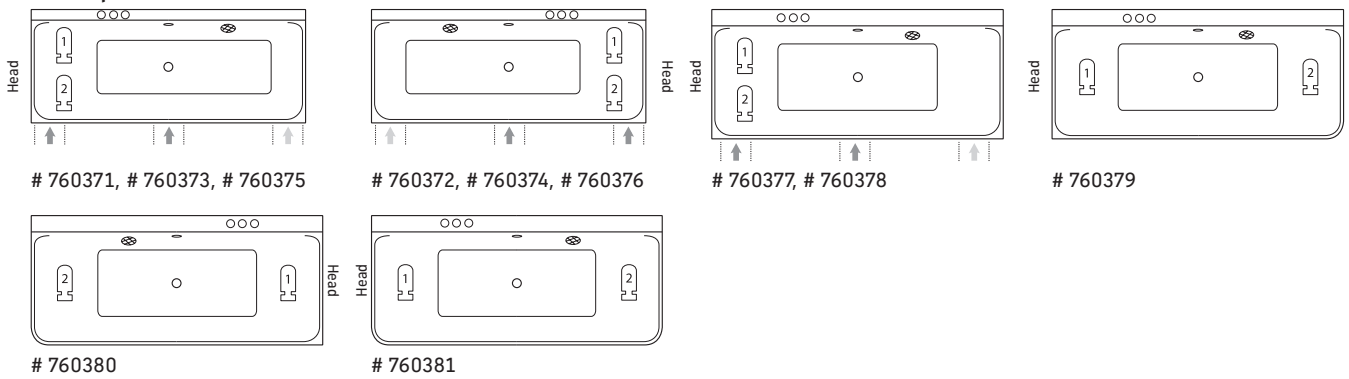


Paiova

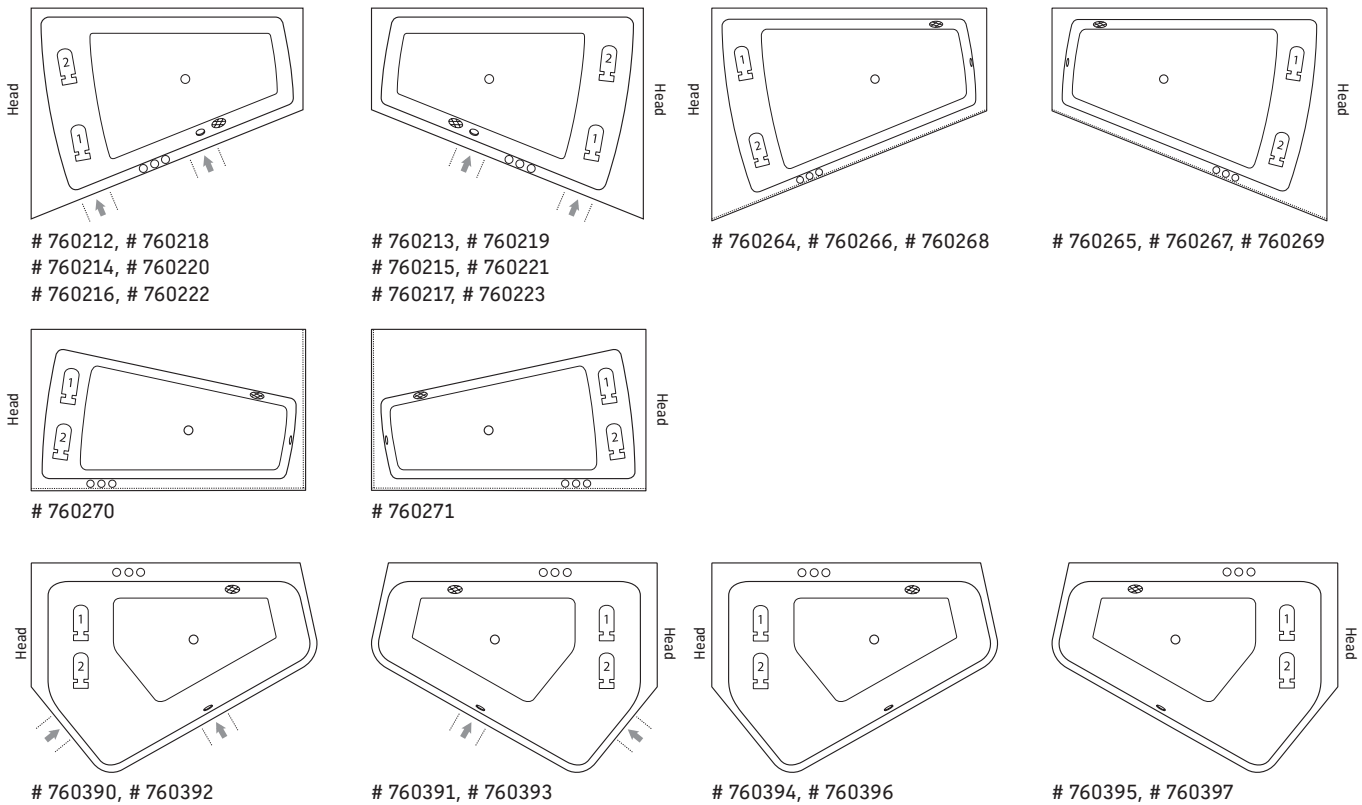


Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...


PuraVida




760181




760198



760182, # 760183

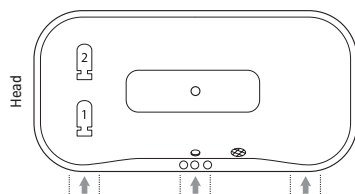


760184




760185


Starck




760050, # 760333, # 760334,
760335, # 760336, # 760337




760052, # 760338, # 760339,
760340, # 760341




760009



760010




760011




760012


Vero



760133




760134




760135, # 760136

Sundeck

With panel



760066, # 760128



760127

Positioning of the control panel on the pillar:

Panel for freestanding version, corner right and back-to-wall version:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem). Custom version on request. Please send us a sketch showing the desired layout. Duravit will check and wherever possible confirm the feasibility.


Panel for corner left:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem). Custom version on request. Please send us a sketch showing the desired layout. Duravit will check and wherever possible confirm the feasibility.


Drill holes for taps on the pillar:

On request, drill holes can be made at the factory for base plates for rim-mounted tap fittings. Please state the desired base plate when ordering. Duravit can supply a list of suitable pre-punched sets on request.

With rail-mount system



760065, # 760126




760125


Positioning of the control panel on tiled rim:

The figures show the standard configuration of the whirlsystem with the positioning of the control panel, placed in the middle of the front tiled rim. The pull button to operate the waste is always on the same side as the control panel (see Fig.). At the head side are the back jets (depending on the whirlsystem).

Custom version on request (see Fig.). Please make a note when ordering.



760065, # 760126



760125

Legend



Unit 1



Unit 2*



Operating unit**



Intake opening



Pull knob



Tap module



Required maintenance openings



Required maintenance openings***



* Only Combi-Systems / ** The number of operating elements is based on the whirltub system and the additional modules selected / *** Only necessary for Combi-System E/L in combination with sound and/or coloured LED light / Air-System, Air-System Cape Cod, Jet Project, Jet-System, Combi-System P, Combi-System E, Combi-System L, Jet-System E and Durapearl-System: 76...

Data sheets for baths and whirltubs


Pre-installation Happy D.2 # 700308/760308

1600 x 700 x 460

Design by sieger design

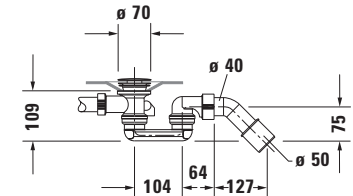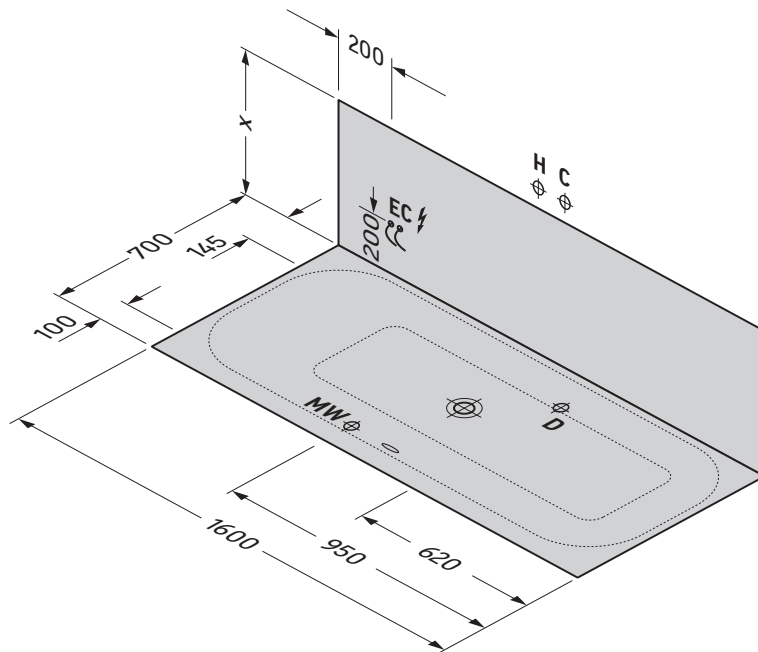

Siphon for bathtub # 700308



Siphon for whirltub # 760308

- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for waste and overflow with water inlet
- EC Electricity connection

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-



Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
32,0	212	47,0	120 x 80 x 175	3/4", 1/2"		700308 00 0 00 0000
43,0	221	85,0	206 x 109 x 86	3/4"	Air-System	760308 00 0 AS 1000
47,0	225	89,0	206 x 109 x 86	3/4"	Jet-System	760308 00 0 JS 1000
52,0	229	94,0	206 x 109 x 86	3/4"	Combi-System P	760308 00 0 CP 1000
65,0 - 72,0	241 - 247	107,0 - 114,0	206 x 109 x 86	3/4"	Combi-System E	760308 00 0 CE 1000
72,0 - 79,0	247 - 254	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System L	760308 00 0 CL 1000


Pre-installation Happy D.2 # 700309/760309

1600 x 700 x 460

Design by sieger design

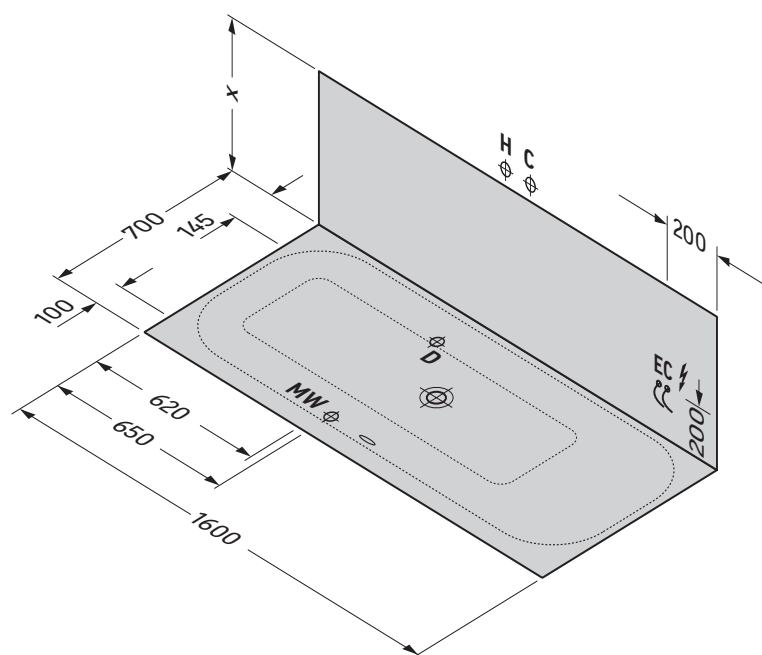

Siphon for bathtub # 700309



Siphon for whirltub # 760309

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-



Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
32,0	212	47,0	120 x 80 x 175	3/4", 1/2"		700309 00 0 00 0000
43,0	221	85,0	206 x 109 x 86	3/4"	Air-System	760309 00 0 AS 1000
47,0	225	89,0	206 x 109 x 86	3/4"	Jet-System	760309 00 0 JS 1000
52,0	229	94,0	206 x 109 x 86	3/4"	Combi-System P	760309 00 0 CP 1000
65,0 - 72,0	241 - 247	107,0 - 114,0	206 x 109 x 86	3/4"	Combi-System E	760309 00 0 CE 1000
72,0 - 79,0	247 - 254	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System L	760309 00 0 CL 1000


Pre-installation Happy D.2 # 700310/760310

↳ 1700 x 700 x 460 ‹

Design by sieger design

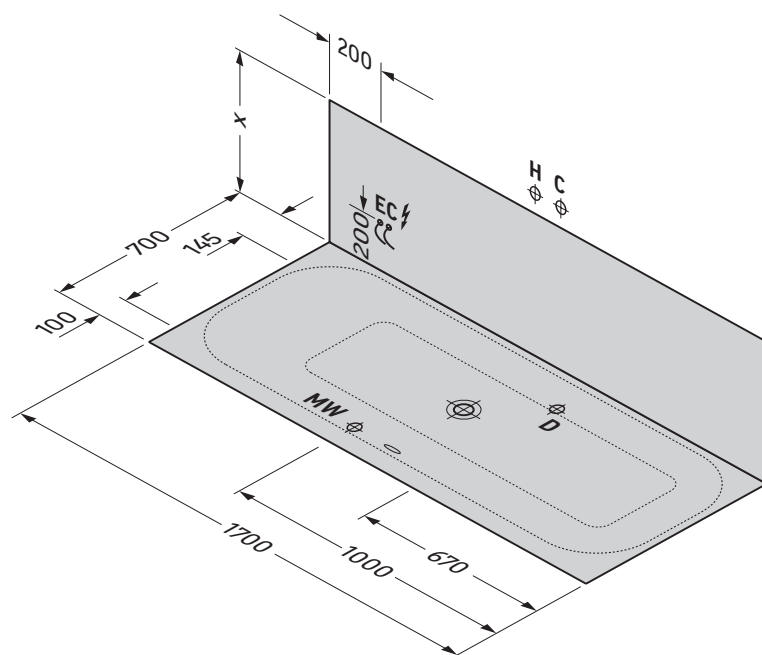

Siphon for bathtub # 700310



Siphon for whirltub # 760310

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
34,0	205	49,0	120 x 80 x 185	3/4", 1/2"		700310 00 0 00 0000
45,0	214	87,0	206 x 109 x 86	3/4"	Air-System	760310 00 0 AS 1000
49,0	218	91,0	206 x 109 x 86	3/4"	Jet-System	760310 00 0 JS 1000
54,0	222	96,0	206 x 109 x 86	3/4"	Combi-System P	760310 00 0 CP 1000
67,0 - 74,0	233 - 239	109,0 - 116,0	206 x 109 x 86	3/4"	Combi-System E	760310 00 0 CE 1000
74,0 - 81,0	239 - 245	116,0 - 123,0	206 x 109 x 86	3/4"	Combi-System L	760310 00 0 CL 1000


Pre-installation Happy D.2 # 700312/760312

1700 x 750 x 460


Design by sieger design

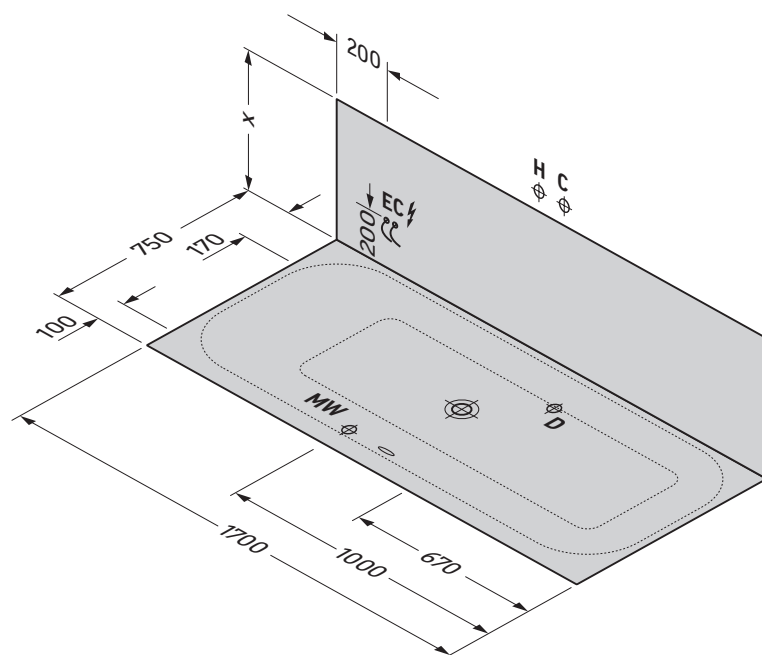

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection



Siphon for bathtub # 700312



Siphon for whirltub # 760312

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-



Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
36,0	216	51,0	120 x 80 x 185	3/4", 1/2"		700312 00 0 00 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Air-System	760312 00 0 AS 1000
51,0	228	93,0	206 x 109 x 86	3/4"	Jet-System	760312 00 0 JS 1000
56,0	232	98,0	206 x 109 x 86	3/4"	Combi-System P	760312 00 0 CP 1000
69,0 - 76,0	242 - 248	111,0 - 118,0	206 x 109 x 86	3/4"	Combi-System E	760312 00 0 CE 1000
76,0 - 83,0	248 - 253	118,0 - 125,0	206 x 109 x 86	3/4"	Combi-System L	760312 00 0 CL 1000


Pre-installation Happy D.2 # 700313/760313

1700 x 750 x 460

Design by sieger design

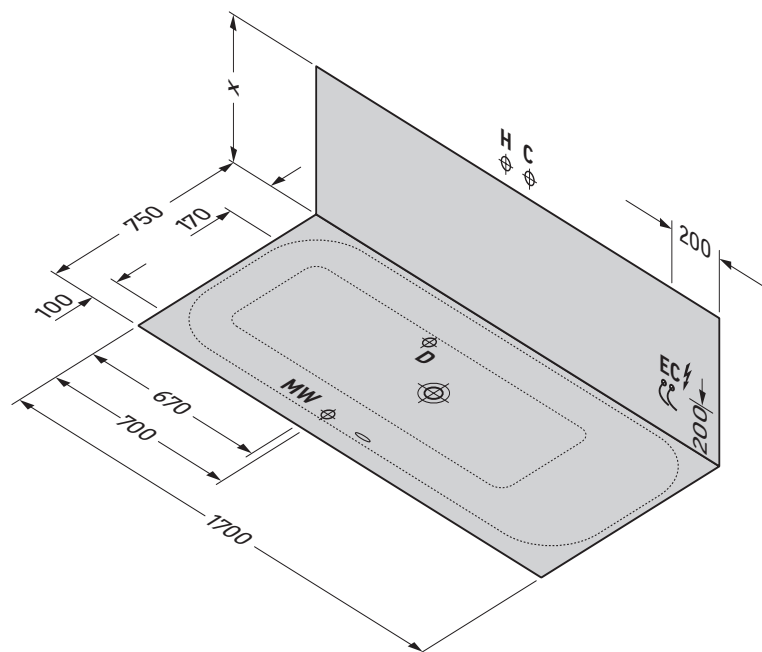

Siphon for bathtub # 700313



Siphon for whirltub # 760313

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for waste and overflow with water inlet
- EC** Electricity connection

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
36,0	216	51,0	120 x 80 x 185	3/4", 1/2"		700313 00 0 00 0000
47,0	225	89,0	206 x 109 x 86	3/4"	Air-System	760313 00 0 AS 1000
51,0	228	93,0	206 x 109 x 86	3/4"	Jet-System	760313 00 0 JS 1000
56,0	232	98,0	206 x 109 x 86	3/4"	Combi-System P	760313 00 0 CP 1000
69,0 - 76,0	242 - 248	111,0 - 118,0	206 x 109 x 86	3/4"	Combi-System E	760313 00 0 CE 1000
76,0 - 83,0	248 - 253	118,0 - 125,0	206 x 109 x 86	3/4"	Combi-System L	760313 00 0 CL 1000


Pre-installation Happy D.2 # 700314/760314

1800 x 800 x 460


Design by sieger design

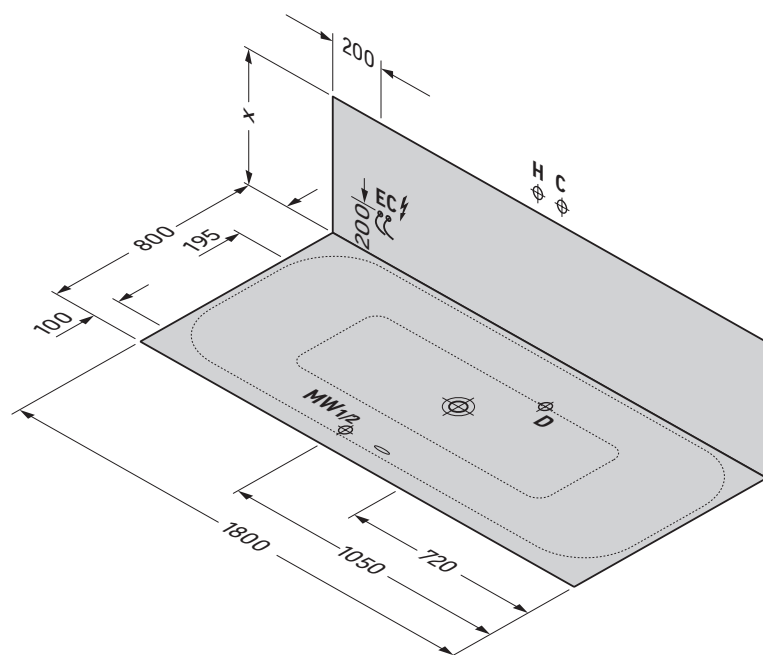


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700314



Siphon with base inlet for bathtub # 700314



Siphon for whirltub # 760314



Siphon with base inlet for whirltub # 760314

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
39,0	194	54,0	120 x 80 x 195	3/4", 1/2"		700314 00 0 00 0000
50,0	201	92,0	206 x 109 x 86	3/4"	Air-System	760314 00 0 AS 1000
54,0	204	96,0	206 x 109 x 86	3/4"	Jet-System	760314 00 0 JS 1000
59,0	208	101,0	206 x 109 x 86	3/4"	Combi-System P	760314 00 0 CP 1000
72,0 - 79,0	217 - 222	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System E	760314 00 0 CE 1000
79,0 - 86,0	222 - 226	121,0 - 128,0	206 x 109 x 86	3/4"	Combi-System L	760314 00 0 CL 1000


Pre-installation Happy D.2 # 700315/760315

1900 x 900 x 460


Design by sieger design

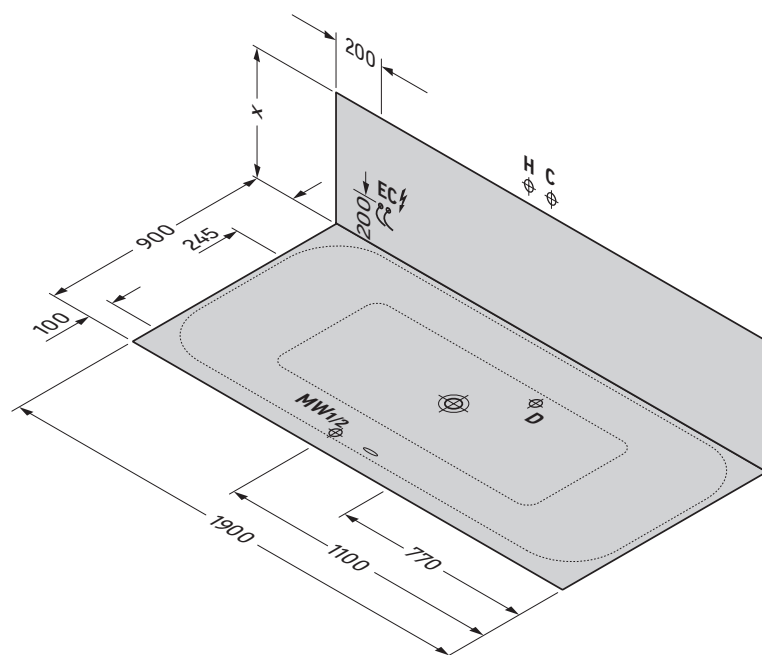


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700315



Siphon with base inlet for bathtub # 700315



Siphon for whirltub # 760315



Siphon with base inlet for whirltub # 760315

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
39,0	194	54,0	120 x 80 x 205	3/4", 1/2"		700315 00 0 00 0000
50,0	201	92,0	206 x 109 x 86	3/4"	Air-System	760315 00 0 AS 1000
54,0	204	96,0	206 x 109 x 86	3/4"	Jet-System	760315 00 0 JS 1000
59,0	208	101,0	206 x 109 x 86	3/4"	Combi-System P	760315 00 0 CP 1000
72,0 - 79,0	217 - 222	114,0 - 121,0	206 x 109 x 86	3/4"	Combi-System E	760315 00 0 CE 1000
79,0 - 86,0	222 - 226	121,0 - 128,0	206 x 109 x 86	3/4"	Combi-System L	760315 00 0 CL 1000


Pre-installation Happy D.2 # 700316/760316

1800 x 800 x 460


Design by sieger design

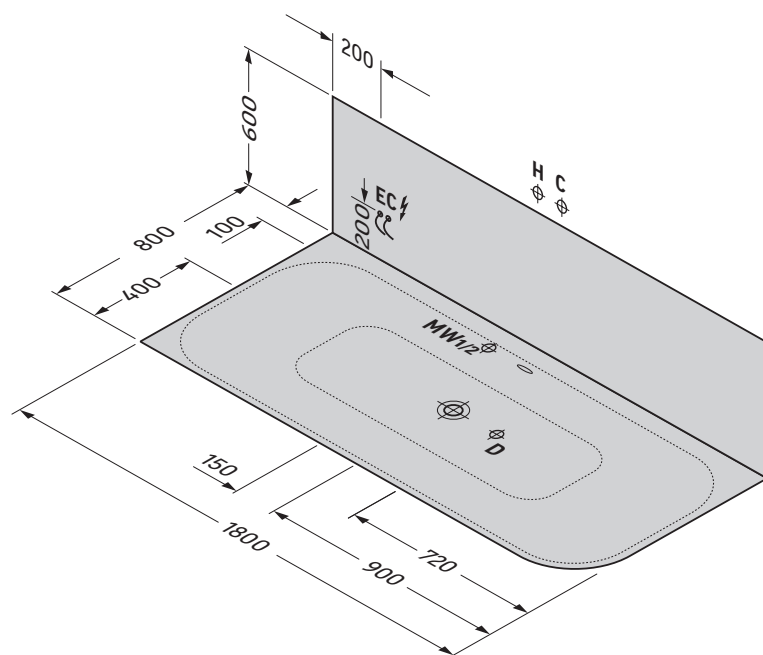


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700316



Siphon with base inlet for bathtub # 700316



Siphon for whirltub # 760316



Siphon with base inlet for whirltub # 760316


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
64,0	211	88,0	187 x 87 x 78	3/4", 1/2"		700316 00 0 00 0000
71,0	216	113,0	206 x 109 x 86	3/4"	Air-System	760316 00 0 AS 1000
74,0	218	116,0	206 x 109 x 86	3/4"	Jet-System	760316 00 0 JS 1000
80,0	222	122,0	206 x 109 x 86	3/4"	Combi-System P	760316 00 0 CP 1000
93,0 - 100,0	231 - 236	135,0 - 142,0	206 x 109 x 86	3/4"	Combi-System E	760316 00 0 CE 1000
100,0 - 107,0	236 - 241	142,0 - 149,0	206 x 109 x 86	3/4"	Combi-System L	760316 00 0 CL 1000


Pre-installation Happy D.2 # 700317/760317

✂ 1800 x 800 x 460 ✂


Design by sieger design

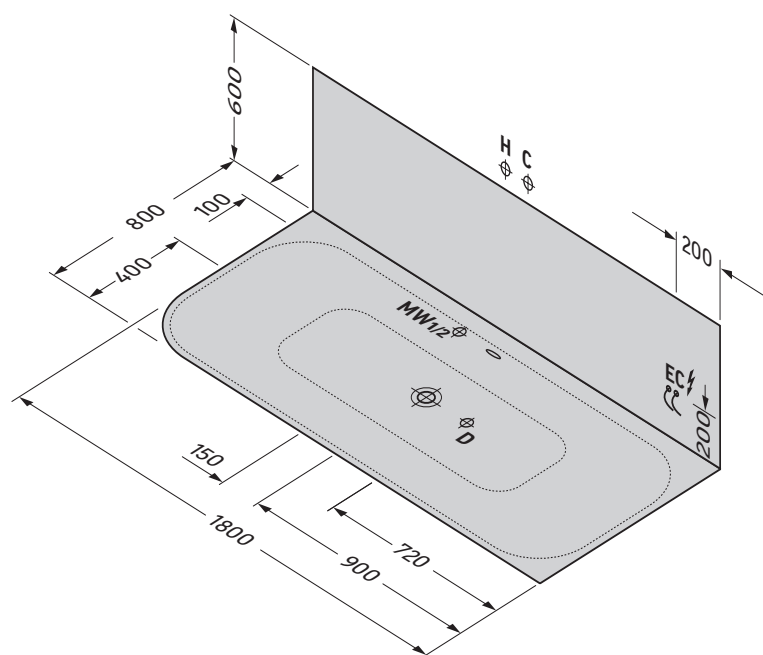


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700317



Siphon with base inlet for bathtub # 700317

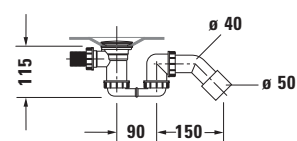

Siphon for whirltub # 760317



Siphon with base inlet for whirltub # 760317


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
64,0	211	88,0	187 x 87 x 78	3/4", 1/2"		700317 00 0 00 0000
71,0	216	113,0	206 x 109 x 86	3/4"	Air-System	760317 00 0 AS 1000
74,0	218	116,0	206 x 109 x 86	3/4"	Jet-System	760317 00 0 JS 1000
80,0	222	122,0	206 x 109 x 86	3/4"	Combi-System P	760317 00 0 CP 1000
93,0 - 100,0	231 - 236	135,0 - 142,0	206 x 109 x 86	3/4"	Combi-System E	760317 00 0 CE 1000
100,0 - 107,0	236 - 241	142,0 - 149,0	206 x 109 x 86	3/4"	Combi-System L	760317 00 0 CL 1000


Pre-installation Happy D.2 # 700318/760318

1800 x 800 x 460


Design by sieger design

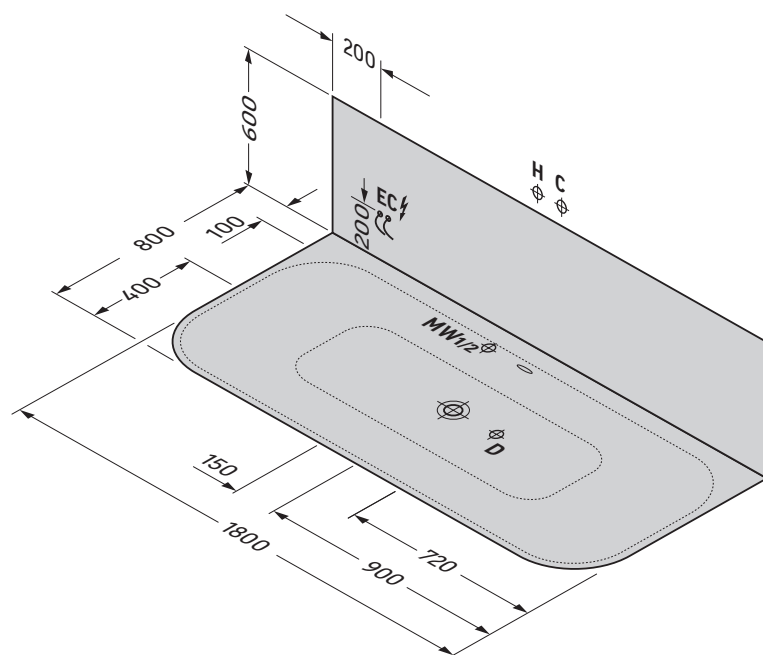


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700318



Siphon with base inlet for bathtub # 700318



Siphon for whirltub # 760318



Siphon with base inlet for whirltub # 760318


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
68,0	214	92,0	187 x 87 x 78	3/4", 1/2"		700318 00 0 00 0000
75,0	219	117,0	206 x 109 x 86	3/4"	Air-System	760318 00 0 AS 1000
78,0	221	120,0	206 x 109 x 86	3/4"	Jet-System	760318 00 0 JS 1000
84,0	225	126,0	206 x 109 x 86	3/4"	Combi-System P	760318 00 0 CP 1000
97,0 - 104,0	234 - 239	139,0 - 146,0	206 x 109 x 86	3/4"	Combi-System E	760318 00 0 CE 1000
104,0 - 111,0	239 - 244	146,0 - 153,0	206 x 109 x 86	3/4"	Combi-System L	760318 00 0 CL 1000


Pre-installation Happy D.2 # 700319/760319

1800 x 800 x 460


Design by sieger design

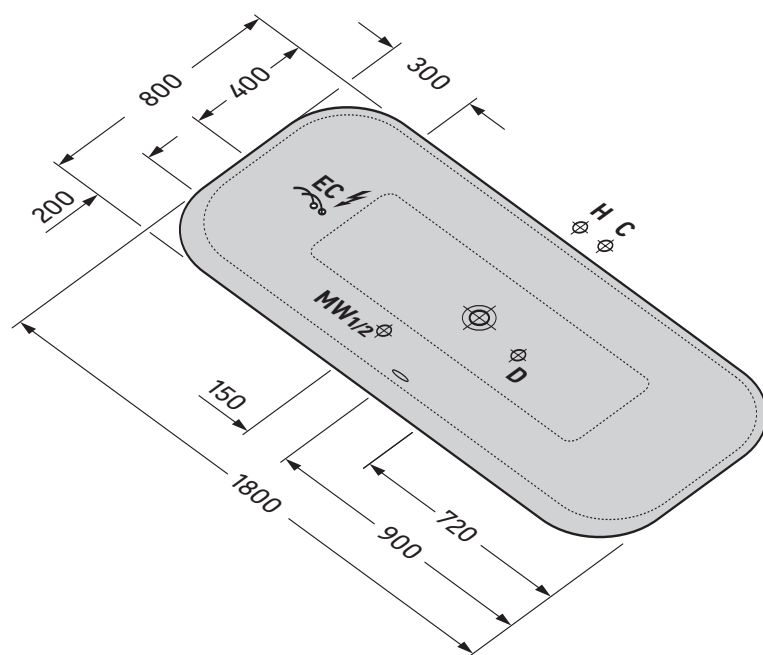


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 70031



Siphon with base inlet for bathtub # 700319



Siphon for whirltub # 760319



Siphon with base inlet for whirltub # 760319


Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
78,0	214	102,0	187 x 87 x 78	3/4", 1/2"		700319 00 0 00 0000
85,0	219	127,0	206 x 109 x 86	3/4"	Air-System	760319 00 0 AS 1000
88,0	221	130,0	206 x 109 x 86	3/4"	Jet-System	760319 00 0 JS 1000
94,0	225	136,0	206 x 109 x 86	3/4"	Combi-System P	760319 00 0 CP 1000
107,0 - 114,0	234 - 239	149,0 - 156,0	206 x 109 x 86	3/4"	Combi-System E	760319 00 0 CE 1000
114,0 - 121,0	239 - 244	156,0 - 163,0	206 x 109 x 86	3/4"	Combi-System L	760319 00 0 CL 1000


Pre-installation Happy D.2 # 700320/760320

1800 x 800 x 460


Design by sieger design

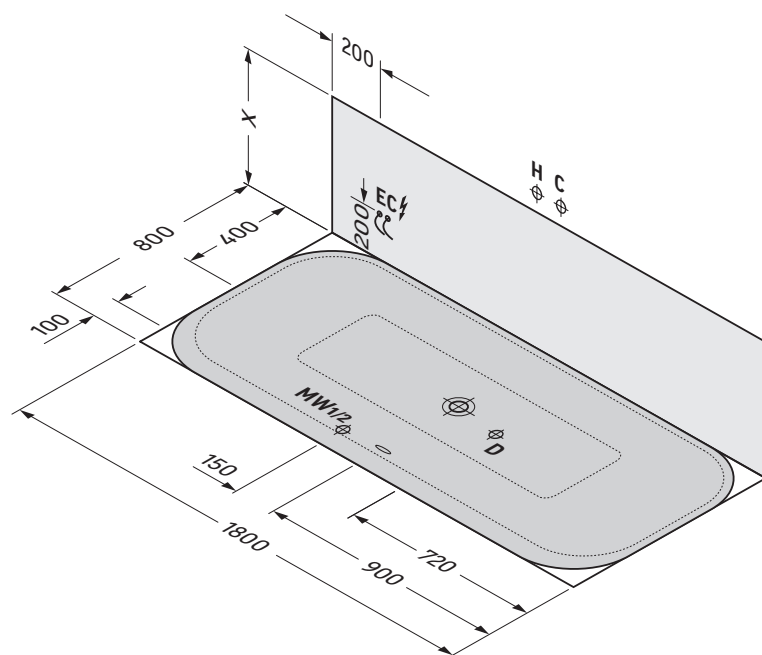


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW1** Mixed water connection for waste and overflow with water inlet
- MW2** Mixed water connection for waste and overflow with base inlet
- EC** Electricity connection




Siphon for bathtub # 700320



Siphon with base inlet for bathtub # 700320



Siphon for whirltub # 760320



Siphon with base inlet for whirltub # 760320

	Height	including feet	including support
X Bathtub	480	600 - 670	~ 620
X Whirltub	480	600 - 635	-

Technical specifications

Net weight kg	Floor load kg/m²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
37,0	185	52,0	120 x 80 x 195	3/4", 1/2"		700320 00 0 00 0000
48,0	193	90,0	206 x 109 x 86	3/4"	Air-System	760320 00 0 AS 1000
52,0	196	94,0	206 x 109 x 86	3/4"	Jet-System	760320 00 0 JS 1000
57,0	199	99,0	206 x 109 x 86	3/4"	Combi-System P	760320 00 0 CP 1000
70,0 - 77,0	208 - 213	112,0 - 119,0	206 x 109 x 86	3/4"	Combi-System E	760320 00 0 CE 1000
77,0 - 84,0	213 - 218	119,0 - 126,0	206 x 109 x 86	3/4"	Combi-System L	760320 00 0 CL 1000

Duravit AG
P.O. Box 240
Werderstr. 36
78132 Hornberg
Germany
Phone +49 78 33 70 0
Fax +49 78 33 70 289
info@duravit.com
www.duravit.com

