



SINGLE CONTROL BAR SINK FAUCET WITH PULL-DOWN SPRAY



MODEL NUMBER: □ 4279410 Pull-Down Faucet

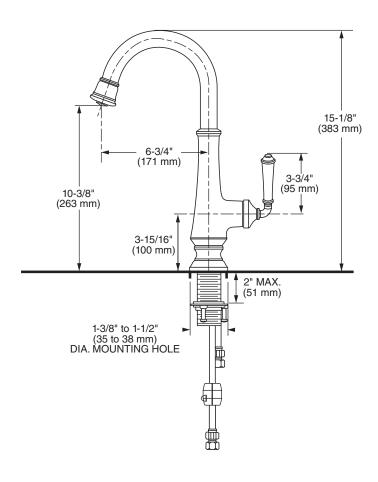

GENERAL DESCRIPTION:

Metal body and handle with brass swivel spout and pull-down spray. Nylon braided pull out hose complete with two integral check valves. Washerless 35 mm ceramic disc valve cartridge. 28-3/4" long braided flexible supply hoses with 3/8" compression connections. Mounting shank with brass fixation ring. 1.5 gpm/5.7 L/min. maximum flow rate. Fitting can be mounted with or without metal escutcheon plate, if needed.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Metal Construction: Quality materials for durability & tlong life.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Pull-down Spray: Adjustable spray pattern-stream to spray and pause feature.

Integral Check Valves: Prevents back flow.

SUGGESTED SPECIFICATION

Single control kitchen faucet shall feature a metal body with brass pull-down spray. Shall also feature washerless ceramic disc valve cartridge, flexible braided supply hoses and two integral check valves. Fitting shall be American Standard Model # 4279410.

© 2017 AS Canada ULC 6/17




DELANCEY™

SINGLE CONTROL BAR SINK FAUCET WITH PULL-DOWN SPRAY

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 NSF 372



1.5 gpm/5.7 L/min. FLOW RATE

		Finish Options			
		Polished Chrome	PVD Polished Nickel	PVD Stainless Steel	Legacy Bronze
Product Number	Description	002	013	075	278
4279410	Pull-Down Bar Sink Faucet				

ADA

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

PART OF LIXIL

© 2017 AS Canada ULC 6/17